




DE94008711

NTIS[®]
Information is our business.

**DEVELOPMENT OF PRECIPITATED IRON CATALYSTS
WITH IMPROVED STABILITY. FINAL REPORT,
SEPTEMBER 1987--SEPTEMBER 1992**

UOP, INC.
DES PLAINES, IL

27 DEC 1993

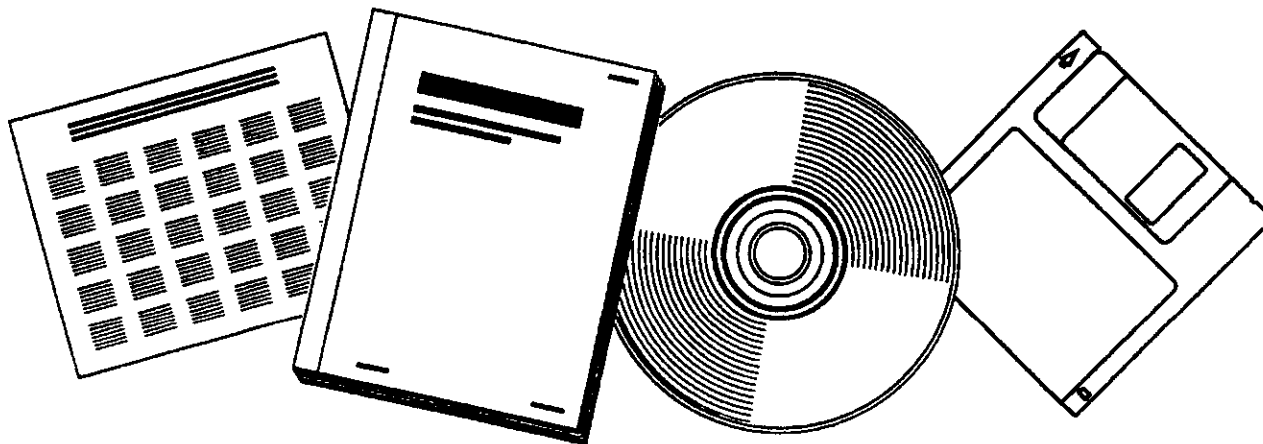

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service

DE/R/79812--T/7

The Development of Precipitated Iron Catalysts with Improved Stability

100-20104
OSTI

Final Report

Prepared for the
United States Department of Energy
under
Contract DE-AC22-87PC79812

Prepared by
Hayim Abrevaya
UOP
Des Plaines, Illinois

December 27, 1993

RECEIVED BY CHICAGO
CPC ON February 3, 1994

RECEIVED
FEB 10 1994

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Contents

Executive Summary	4
Objective	4
Tasks in the Program	5
Key Results	5
Draining of Liquid Products from Slurry Autoclave	5
Reference Iron Catalysts	6
Iron Catalyst Preparation Parameters	7
Iron Catalyst Performance in Fixed-Bed Reactor	9
Iron Catalyst Preparation Plant	10
Iron Catalyst Performance in a Slurry Reactor	11
Deactivation Chemistry for Iron Catalysts and Modification of Catalysts	12
Contract Objective	12
Introduction	12
Conversion and Selectivity Calculations	14
Results and Discussion	16
Task 1. Upgrade of the Existing Pilot Plants	16
Task 2. Performance of Reference Catalysts	18
Iron Catalyst from Mobil	19
Fixed-Bed Run 52	20
Fixed-Bed Run 53	21
Task 3. Construction of a Catalyst Preparation Plant and Development of a Baseline Catalyst	23
Determination of pH's for Precipitating Fe and Cu	23
Description of DSC and TGA Experiments	24
Description of TPR Experiments	26
Use of DSC for Determining Calcination Temperature Requirement for Fe-Cu Catalysts	28
Effect of Calcination Temperature	30
Effect of pH	32
Effect of Cu Level	35
Effect of Potassium	37
Catalysts Precipitated with NH_4OH	38
Summary of the Effect of Catalyst-Preparation Parameters	38
Catalysts Prepared in the Catalyst Preparation Plant	41
Catalyst Preparation Plant	41
Drying, Calcination, Impregnation, and Calcination	42
Catalysts Prepared in the Plant	43
Example of Catalyst Characterization	43
Details of Preparation for Catalyst 6616-18	44
Experimental Fe Catalyst Evaluation in Fixed-Bed	46
Shakedown of Slurry Pilot Plant	49

Evaluation of a Ceramic Filter in the Autoclave	51
Evaluation of Filter with Large Pore Sizes	53
Evaluation of Different Filtration Procedures	56
Evaluation of Baseline Fe Catalyst in Run 19	60
Performance during the First 1,250 Hours	61
Effect of Conversion Level on Reaction Rate	63
Catalytic Performance after Return to early Test Conditions	64
Effect of Conversion Level on Catalytic Selectivity	65
Predicting Catalytic Performance in a Slurry Bubble-Column Reactor	65
Catalytic Performance after Restart-Up following Cold Shutdown	66
Product Distribution	68
Conclusions	68
References	69