

①②

EUROPEAN PATENT APPLICATION

②① Application number: **80107208.3**

⑤① Int. Cl.³: **B 01 J 29/06, B 01 J 29/14,**
B 01 J 29/34, B 01 J 37/16,
C 07 C 1/04

②② Date of filing: **20.11.80**

③① Priority: **20.11.79 US 95989**

⑦① Applicant: **UNIVERSITY OF DELAWARE, South College Avenue, Newark Delaware (US)**

④③ Date of publication of application: **27.05.81**
Bulletin 81/21

⑦② Inventor: **Fraenkel, Dan, 93 Amstel Avenue, E-21, Newark Delaware 19711 (US)**
Inventor: **Gates, Bruce Clark, 8 Hillcroft Road Windy Hills, Newark Delaware 19711 (US)**

⑧④ Designated Contracting States: **AT BE CH DE FR GB IT LI LU NL SE**

⑦④ Representative: **Abitz, Walter, Dr.-Ing. et al, Abitz, Morf, Gritschneider P.O. Box 86 01 09, D-8000 München 86 (DE)**

⑤④ **Catalyst, method for catalyst manufacture and use for effecting a Fischer-Tropsch synthesis.**

⑤⑦ **A Fischer-Tropsch catalyst comprising a particulate synthetic zeolite incorporating a transition metal catalyst reduced in situ by a preselected vaporous reductant metal, the method of catalytic manufacture and use.**

EP 0 029 255 A1

CATALYST, METHOD FOR CATALYST MANUFACTURE AND
USE FOR EFFECTING A FISCHER-TROPSCH SYNTHESIS

Introduction

This invention relates to a highly selective catalyst giving
5 improved yields in the conversion of carbon monoxide and hydro-
gen. For classification purposes, our catalyst can be considered
to be a Fischer-Tropsch type.

The Government of the United States has certain rights
to this invention pursuant to National Science Foundation Grant
10 No. ENG-7826054.

Background of the Invention

There presently exist a number of Fischer-Tropsch catalysts,
including at least one commercial type employing Co:ThO₂ de-
posited on kieselguhr, all as described by H. Pichler and A.
15 Hector in the Encyclopedia of Chemical Technology, Kirk-Othmer,
vol. 4, pp. 446-489, Interscience Publishing Company (1964).
Generally, these catalysts produce a mixture of hydrocarbon
products which require subsequent separation, which is expensive.
In addition, some of the products have no ready markets at the
20 time of production, thereby constituting an economic disadvan-
tage (refer Catalysis Reviews-Sci. Eng. 14 (2) pp. 153-191 (1976)
by M. A. Vannice). Moreover, the product yields of known
Fischer-Tropsch catalysts are less than optimum.

Object of the Invention

25 An object of this invention is the provision of an improved
Fischer-Tropsch catalyst of high performance, improved speci-
ficity of product manufacture and economical in first cost and
long term use.

Summary of the Invention

Generally, this invention comprises a Fischer-Tropsch catalyst constituting a preselected microporous support, e.g., a synthetic zeolite within which a preselected transition metal, such as, for example, Co, is exchanged, after which the transition metal is reduced by the vapor of a preselected metal having an appreciable electromotive series potential difference from the transition metal, e.g., Cd, where Co is the specific transition metal supra. Depending upon the transition metal, reductant metal choice, and the particular synthetic zeolite employed as the catalyst support, it is possible to obtain an exceedingly high product selectivity (specificity), high production rate of a given product, e.g., (1) propylene, in the case of a zeolite 5A (Ca-A) support, which has undergone ion exchange with a cobalt salt followed by reduction with Cd in the vapor phase or (2) a mixture of C₄-C₇ hydrocarbons in the case of a zeolite of the Faujasite family which has undergone ion exchange with a cobalt salt followed by reduction with Cd in the vapor phase.

Drawings

The following drawings constitute part of this disclosure, in which:

FIG. 1 is a schematic portrayal of transition metals, log partial pressures, mm Hg v. temperature, °C x 10² as an aid in catalyst selection according to this invention,

FIG. 2 overall is a schematic representation of laboratory apparatus utilized in the manufacture of a preferred Co transition metal, Cd reducing metal, incorporated in a synthetic zeolite type catalyst according to this invention in which FIG. 2a shows the first stage activation apparatus, FIG. 2b shows the sealed tube detached from the FIG. 2a apparatus, as employed for the second stage reduction, and FIG. 2c shows the apparatus remainder after the reductions of FIGS. 2a and 2b as employed for the third stage removal of excess metallic reductant,

FIG. 3 is a plot of $\log [HC_n]$ v. n, Number of Carbons in Hydrocarbon Products for catalysts Co^O-CdA and Co^O-CdY , respectively,


FIG. 4 is a plot of C_3H_6 Peak Area $\times 10^{-3}$ v. Reaction Time, Hrs. for Experiment #2 F-T, and

FIG. 5 is a comparison plot of Hydrocarbons, Wt. Percent v. Weight Percent of Hydrocarbon Products for (1) Co^O-CdA at $287^{\circ}C$ and (2) Co^O-CdY at $183^{\circ}C$.

Description of the Invention

The various types and properties of synthetic zeolites, except their uses in catalysis (which subject was deliberately omitted by the author, refer Preface, page v) are described extensively in the book Zeolite Molecular Sieves, Structure, Chemistry and Use, by Donald W. Breck, John Wiley & Sons (1974).

According to Breck, supra, the structural formula of a zeolite is best expressed for the crystallographic unit cell as



M = the cation of valence n,
w = the number of water molecules, and the ratio
y/x usually has values of 1-5, depending upon the structure.
The sum (x + y) is the total number of SiO₄ plus AlO₄
5 tetrahedra in the unit cell. The portion within [] re-
presents the framework composition.

Table 4.26 "Alphabetical List of Synthetic Zeolites" of
Breck pp. 348-52 supra tabulates an alphabetical list of syn-
thetic zeolites, together with major properties, including,
10 particularly, cations, structural stability toward dehydration,
pore size, pore volume, framework in terms of principal con-
stituents, such as Si/Al ratios, and X-ray data.

An important advantage of the molecular sieve type syn-
thetic zeolites is their exceedingly uniform pore sizes and
15 volumes, which contributes "shape selectivity", which is
regarded as a significant factor in the improved results ob-
tained by this invention. The concepts of shape-selective
catalysis and examples of shape-selective catalysis have been
reviewed by Csicsery (J.A. Rabo, ed., Zeolite Chemistry and
20 Catalysis, American Chemical Society, 1976.)

Zeolites employed in this invention must also possess
stability and have effective ion-exchange capability. For
example, Linde-A type zeolites are very shape-selective and
have high ion-exchange capacity, but they are unstable under
25 acidic conditions and at temperatures higher than about 550°C.
On the other hand, Faujasite-type zeolites (X and Y) are less
shape-selective than the type A zeolites, but can still be
suitable for reactions with reactants and products which are
too large to traverse the channels of the small-pore zeolite A.

Zeolite Y is acid-resistant and thermally stable up to approximately 700°C. Broadly, the upper temperature limit is approximately 800°C. In contrast, zeolites of the ZSM series, as well as Chabazite-Erionite systems have poor ion-exchange capacity due to their very large Si/Al content ratios. Mordenite zeolites also have relatively large Si/Al ratios but are still potentially desirable catalyst supports because they are as thermally stable and acid-resistant as zeolite Y and have a pore size larger than that of zeolite A but smaller than that of zeolite Y.

The following Table I presents a comparison of a number of zeolites as regards properties useful to this invention. (The last two tabulated items are naturally-occurring species, whereas the earlier-listed species are synthetic zeolites, of which the first three are particularly preferred. In general, the larger the Si/Al ratios, the poorer the ion exchange capability.) Species' properties denoted + are desirable, whereas those denoted - are not advantageous.

TABLE I

Zeolite Type	Si/Al Ratio	Shape Selectivity	Acid Resistance, Thermal Stability	Ion Exchange Capacity
A	~1	+	-	+
X	1-3	-	-	+
Y	>3	-	+	+
Mordenite	5	+,-	+	+,-
ZSM	6 or 6+	+,-	+	-
Chabazite	4(?)	+	+	-

There are at least three other factors which determine catalyst composition, activity and selectivity according to this invention, including: (1) the choice of an appropriate transition metal for the conduct of the particular Fischer-Tropsch synthesis to be effected, (2) the appropriate electrochemical relationship between the transition metal preselected under (1) and an effective vaporized reducing metal and (3) the thermal stability, and acid resistance, of the synthetic zeolite support under conditions of both catalyst preparation and subsequent use.

The following Table II lists the electrochemical potentials of a number of potential transition metal, reducing metal combinations which are considered effective according to this invention, especially those denoted by a + sign. In general, the larger the reduction potential of the reductant with respect to the reduction potential of the transition metal, the better the catalytic results to be expected. However, even if the known potential of the reductant metal under the standard conditions, i.e., based on KCl half cells at 25^o C, is somewhat smaller than that of the transition metal, the reductant metal may still be powerful enough to be effective under working conditions.

TABLE II

Reducing Metals	$\text{Cs}^+ + e^- \leftrightarrow \text{Cs}$	-2.923V	+
	$\text{Rb}^+ + e^- \leftrightarrow \text{Rb}$	-2.925V	+
	$\text{K}^+ + e^- \leftrightarrow \text{K}$	-2.924V	+
	$\text{Na}^+ + e^- \leftrightarrow \text{Na}$	-2.711V	+
	$\text{Li}^+ + e^- \leftrightarrow \text{Li}$	-3.045V	
	$\text{Mg}^{2+} + 2e^- \leftrightarrow \text{Mg}$	-2.375V	+
	$\text{Zn}^{2+} + 2e^- \leftrightarrow \text{Zn}$	-0.7628V	+
	$\text{Cd}^{2+} + 2e^- \leftrightarrow \text{Cd}$	-0.4026V	+
	$\text{Hg}^{2+} + 2e^- \leftrightarrow \text{Hg}$	+0.851	
Transition Metals	$\text{Mn}^{2+} + 2e^- \leftrightarrow \text{Mn}$	-1.029V	
	$\text{Fe}^{2+} + 2e^- \leftrightarrow \text{Fe}$	-0.409V	+
	$\text{Co}^{2+} + 2e^- \leftrightarrow \text{Co}$	-0.28V	+
	$\text{Ni}^{2+} + 2e^- \leftrightarrow \text{Ni}$	-0.23V	+
	$\text{Cu}^{2+} + 2e^- \leftrightarrow \text{Cu}$	+0.34V	+
	$\text{Ag}^+ + e^- \leftrightarrow \text{Ag}$	+0.80V	+
	$\text{Pd}^{2+} + 2e^- \leftrightarrow \text{Pd}$	+0.83V	+

If a mixture of transition metal ions is employed, the mixture is appraised, vis-a-vis the reductant metal, with reference to the lowest potential transition metal involved.

It is speculated that the catalytic metal particles are distributed within the zeolite as extremely small uniform metal clusters ($< 10\text{\AA}^0$) trapped within the zeolite pores. This trapping reduces migration of the catalyst through the intracrystalline channels to the outer space, or macropores, between the zeolite particles. Such migration is otherwise unavoidable, causing sintering of the metal and consequent destruction of catalytic activity and/or selectivity.

It is speculated, although confirmatory evidence has not yet evolved, that the reductant metal reduces the transition metal from the ionic state leaving it in significant amounts within the zeolite micropores, so that catalytic action is effected by the transition metal alone or by both metals individually or in concert. It appears feasible to use a mixture of transition metals, instead of only one, if this is desirable under the particular reaction circumstances. Also, if desired, a mixture of several reductants should be equally practicable. Also, it is entirely possible that reductant and transition metals combine into an alloy-like cluster. Some multivalent reductant metals, such as Cd, might remain in different reduced valent states, e.g., Cd^{+1} , Cd^{+2} and various combinations of such species with the transition metals in situ.

Catalyst Preparation

Example 1 - Catalyst Co⁰-CdA-CA-1-1-a

The starting zeolite was type 5A (Ca-A) marketed by Chromatography Associates, Inc., Catalog #MS560 powder. This product is a Linde-A zeolite produced by Union Carbide Corporation. It is characterized as structure Ca-A in the literature.

The zeolite was sieved at the outset and only the 60-80 mesh fraction was employed for catalyst preparation.

(a) Ion Exchange

10g. of the starting zeolite, 5A, was placed in a 250 ml flask provided with a condenser. 100 ml of 0.1 N $CoCl_2 \cdot 6H_2O$ was added and the flask heated to $\sim 95^\circ C$ and kept at this temperature for 2 hrs. under moderate mechanical stirring.

At this point the supernatant solution, which had lost its typical blue-purple color, was decanted and a fresh 100 ml portion of the CoCl_2 solution was added. The 2 hr. heating-stirring cycle was repeated, followed by decantation of left over solution. A total of six of these exchange steps were effected over a total time of 12 hrs., after which the mixture was filtered through a Büchner funnel and washed thoroughly with ion-free water until no Cl^- ions were detected by AgNO_3 test. The CoA thus obtained was then dried at $120^\circ - 140^\circ\text{C}$ for 16 hrs. This sample was designated Co-A-CA-1-1.

(b) Reduction by Metal Vapor (Cd)

Referring to FIGS. 2a, 2b and 2c, the reduction was effected as follows:

The zeolite was introduced into the pyrex main tube 10, and the Cd metal particles in 10-100 times excess (~ 0.5g) Baker, Mossy, 4-1184, into pyrex side tube 11 joined to main tube 10 by a ground glass connection 12. The system was evacuated to $\sim 10^{-3}$ torr continuously via stopcock drawoff 15 and the main tube placed within a resistance furnace 16 which was heated gradually to 470°C where it was maintained at this temperature for 11 hrs.

Following this stage (FIG. 2a) the zeolite powder was shaken through ground glass connection 12 from main tube 10 into side tube 11 and mixed with the Cd metal particles in bulbous end 11a. Side tube 11, still under vacuum, was sealed off and detached from the rest of the apparatus by closing off sealing point 11b in a burner flame, after which it was placed separately in resistance furnace 16 (FIG. 2b). Sealed section 11, containing the reacting mixture, was heated

to 460°C for 16 hrs., and then to 490-500°C for an additional period of 42 hrs., after which it was cooled to room temperature and opened. The tube contents were separated on filter paper to give cadmium metal particles and zeolite powder.

5 The zeolite powder fraction was transferred into main tube 10, which was evacuated to $\sim 10^{-3}$ torr and heated in furnace 16 to 460-500°C for 16 hrs (FIG.2c). Black Cd deposits were noted on the internal wall of tube 10 adjacent the entrance to furnace 16 and away from the catalyst powder. After cooling, 10 the powder, gray-black in color, was taken out of tube 10 and stored in a vial at room temperature. This powder is designated Co⁰-CdA-CA-1-1-a.

Example 2 - Catalyst Co⁰-CdY-1-1

The starting zeolite was SK-41(HY) from the Linde Division, 15 Union Carbide Corporation, in the form of a powder (1-2 μ m particle size).

The ion exchange procedure was conducted as per Example 1, supra, thereby providing sample Co-Y-1-1.

20 The reduction step was essentially the same as that for Co-A supra, except that the reduction was effected as a one-step heating at 450⁰-460⁰C for 10 hrs.

Fischer-Tropsch (F-T) Experiments

-Experiment #1 - FT Generally Selective

Production of Propylene from (Purified) Syngas

25 (a) 0.5063 gm of Co⁰-CdA-CA-1-1-a catalyst mesh size 60/80 was introduced into the reactor. The reactor was a stainless steel tube (~ 1 cm dia. x 10 cm long) within which was placed a 1 cm x 10 cm loosely rolled sheet of glass wool,

(Pyrex Filtering Fiber, Corning Glass Works #3950) upon which the particulate catalyst was dusted before roll-up.

The catalyst was activated in situ by passing substantially pure H_2 at 1 atm. flow rate 30 cc/min., at $204^\circ C$ for 14 hrs. Afterwards, the system was cooled to $\sim 150^\circ C$ and a mixture of substantially pure CO and H_2 , 1:1 proportion, was flowed through the reactor at 25 cc/min. under a pressure of 92 p.s.i. with the temperature brought up to $200^\circ C$.

Chromatograms taken during the 28 hr. duration of the run showed the following:

(a) When the temperature reached $182^\circ C$, two C_3 products were the only ones in the gas chromatographic hydrocarbon (HC) column, these being propane ($\sim 12\%$) and propylene ($\sim 88\%$). A chromatographic column effective for determining oxygenated products appeared to indicate a product (unidentified).

After 5 hrs. at $200^\circ C$ the C_3 peaks decreased 3-fold and there was a slight increase in CH_4 , which was originally present as an impurity.

(b) The reactor was cooled to room temperature then flushed with hydrogen at one atm. pressure for 4 hrs. Then a substantially pure H_2/CO mixture (4%CO) was passed through the reactor under 82 p.s.i. at a rate of 30 cc/96 secs.

The temperature was raised gradually. After 20 mins., at $104^\circ C$ no HC products were detected. 35 mins. later, when the temperature had reached $153^\circ C$, there was still no HC produced. After an additional 25 minutes, at $182^\circ C$, still no HC was detected. Finally, 50 mins. later, at $217^\circ C$, propane and propylene were detected in higher yield than in (a) and at higher propane-to-propylene ratio, i.e., 1:2. A third chromatographic peak, very small, of unknown identity, existed just ahead of the propylene peak. After 50 mins. at $217-218^\circ C$, this small peak vanished and the propane : propylene ratio changed to 2:3,

respectively, and the hydrocarbon yield dropped to ~ 50% of the (a) yield.

After an additional period of 4 hrs., the yield dropped to ~ 10%, whereupon the run was continued at 235-205°C for an additional period of 40 hrs. with reactivity close to zero. At this point, the catalyst was reactivated for 6 hrs. by treatment with hydrogen at atmospheric pressure 30 cc/72 sec. flow rate, at ~ 250°C. The reactor was cooled to 135°C, followed by passing a substantially pure CO/H₂ mixture (4%CO) at 80 p.s.i. Gradual heating to 223°C over a period of 2 hrs. resulted in a 2:3 propane : propylene mixture at very low yields.

The catalyst was then reactivated a second time using hydrogen at one atmosphere, 30 cc/2 min. flow rate, temperature 295°C for 16 hrs. when the temperature was permitted to drop to ~ 206°C and held at this value for an additional 16 hrs. At this point, substantially pure CO/H₂, (4%CO) was flowed through the reactor at 82 p.s.i., 30 cc/91 secs. flow rate and the system gradually heated up to 294°C. At the latter temperature, after 1.5 hrs., only traces of C₃ products were detected. The system was then cooled to 130°C and substantially pure CO/H₂, 1:1 mixture, was introduced at 94 p.s.i., flow rate 30 cc/118 secs. After 1.5 hrs., at 220°C, small amounts of propylene were detected, as well as some increase in the CH₄ level. 1.5 hrs. later, at 223°C, the CH₄ increased further and became the main product, although there was some ethane and ethylene present as well as traces of propane and some propylene. After a further 30 mins. at 250°C, the same pattern existed. 30 mins. thereafter, at 275°C, the F-T spectrum became more pronounced and, finally, at 287°C, it reached a maximum, showing the Schulz-Flory distribution with C₁-C₅

product mixture. After 2.5 hrs. more at ~ 287°C there was no perceptible catalyst deactivation. Estimates of the relative HC concentrations at this stage were:

TABLE III

	<u>C₁</u>	<u>C₂</u>		<u>C₃</u>		<u>C₄</u>		<u>C₅</u>	
	CH ₄	C ₂ H ₆	C ₂ H ₄	C ₂ H ₂	C ₃ H ₆	C ₄ H ₁₀	*Butenes	cis-z-butene	C ₅ H ₁₂
Peak area	16,468	3,447	1,274	1,425	1,727	375	280	283	80
Corrected Intensity	16,977	3,553	1,313	1,454	1,762	344	257	260	77
Wt %	65.3	13.7	5.0	5.6	6.8	1.3	1.0	1.0	0.3
log[HC _n]	0.61	1.66		1.11		2.35			3.62

*excluding cis-z-butene

The results are plotted as log [HC_n] v n, Carbon Number (FIG. 3).

At this point the heating was stopped and the system allowed to cool to room temperature overnight, still under pressure. The pressure was then released and the system purged with hydrogen for 2 hrs. at one atmosphere pressure. The catalyst was gray-black in color and showed no carbonyls in its infrared spectra.

-Experiment #2 F-T-Specific Selective

Production of Propylene from (Purified) Syngas

0.5004 gm. of the same catalyst was utilized as in Experiment 1 FT. The catalyst was activated under hydrogen, one atmosphere pressure at 200°C for 5 hrs. Then the system was cooled to ~ 100°C and substantially pure CO/H₂ mixture, 1:1 proportions, was flowed through under 95 p.s.i. The system was heated gradually to 100°C. After one hour at 126-8°C, only

traces of propylene were detected. After ~ 30 mins. at 151°C, the concentration of propylene, as the only HC product, started to build up, reaching its highest level after ~ 2 hrs., and remaining constant for 18 hrs. This is shown in FIG. 4.

5

-Experiment #3 F-T-Unreduced Co Not Effective

0.500 gm. of Co-A-CA-1-1, 60/80 mesh was employed as catalyst. The reactor was first flushed with substantially pure hydrogen at one atmosphere pressure, 30 cc/130 sec. flow rate, heated to 200°C. The catalyst was activated at this temperature for 5 hrs., followed by cooling to ~ 100°C.

10

Substantially pure CO/H₂, 1:1 mixture, was introduced at 93 p.s.i. and the temperature raised to 150°C. No reaction was detected, as shown by the HC chromatograph column after 1.5 hrs. at this temperature. The temperature was then raised to 185°C and kept at this temperature for one hour during which only traces of propylene were detected. The blue catalyst powder recovered after the run showed no CO peak in the infra-red spectrum.

15

-Experiment #4 F-T-Selective

20

Production of C₄-C₆ Products Primarily

0.4907 gm. of Co^o-CdY-1-1 was the catalyst, activated by flushing with substantially pure hydrogen (1 atm. pressure) at 200°C for 9.5 hrs. at 30 cc/104 sec. flow rate.

25

After cooling to 65°C, substantially pure CO/H₂, 1:1 proportions, was introduced and passed through the reactor at 95 p.s.i., flow rate 30 cc/110 secs.

At 103°C no HC products were formed but, on the oxygenated products chromatograph, the single peak detected in Experiment #2 F-T appeared again.

After 4 hrs. at 103°C the temperature was raised to 152°C. The first chromatogram at this temperature showed the production of CH₄ and traces of higher HC products (i.e., C₂-C₄). The oxygenated products chromatographic column again showed the presence of the undetermined peak of Experiment #2 F-T (a).


After 5.5 hrs. at 153°C, the product concentrations were slightly higher, but the pattern remained the same. At this point, the temperature was raised to 182°C and a "full F-T spectrum" resulted. This spectrum was as follows:

TABLE IV

	C ₁	C ₂		C ₃		C ₄		
	CH ₄	C ₂ H ₆	C ₂ H ₄	C ₃ H ₈	C ₃ H ₆	n-C ₄ H ₁₀	i-C ₄ H ₁₀	C ₄ H ₈
Peak area	43,733	4,209	1,066	5,228	2,524	55,611	2,530	700
Corrected Intensity	45,085	4,332	1,099	5,335	2,575	51,019	2,321	640
Wt %	25.0	2.4	0.6	3.0	1.4	28.3	1.3	0.3
Log[HC _n]	0.19	2.90		2.83		1.69		
		C ₅			C ₆			
		n-C ₅ H ₁₂	i-C ₅ H ₁₂	C ₅ H ₁₀	n-C ₆ H ₁₄	i-C ₆ H ₁₄	C ₆ H ₁₂	C ₇ H ₁₆
Peak area		37,218	1,300	2,000	16,760	1,000	6,000	5,000
Corrected Intensity		35,786	1,250	1,920	16,270	970	5,800	5,000
Wt %		19.9	0.7	1.1	9.0	0.5	3.2	2.8
Log[HC _n]		1.44			1.02			2.45

FIG. 3 presents the comparison of the Table IV analyses as a Schulz-Flory plot for both the A- and the Y-based catalysts.

After 2 hrs. at 182-3°C there was no sign of deactivation of the catalyst. 3.5 hrs. after the catalyst temperature reached 182°C, heating was stopped and the system was cooled under pressure. Approximately 6 hrs. later the catalyst was removed from the reactor. The color was gray and the catalyst displayed no carbonyl peak in the infrared spectrum.

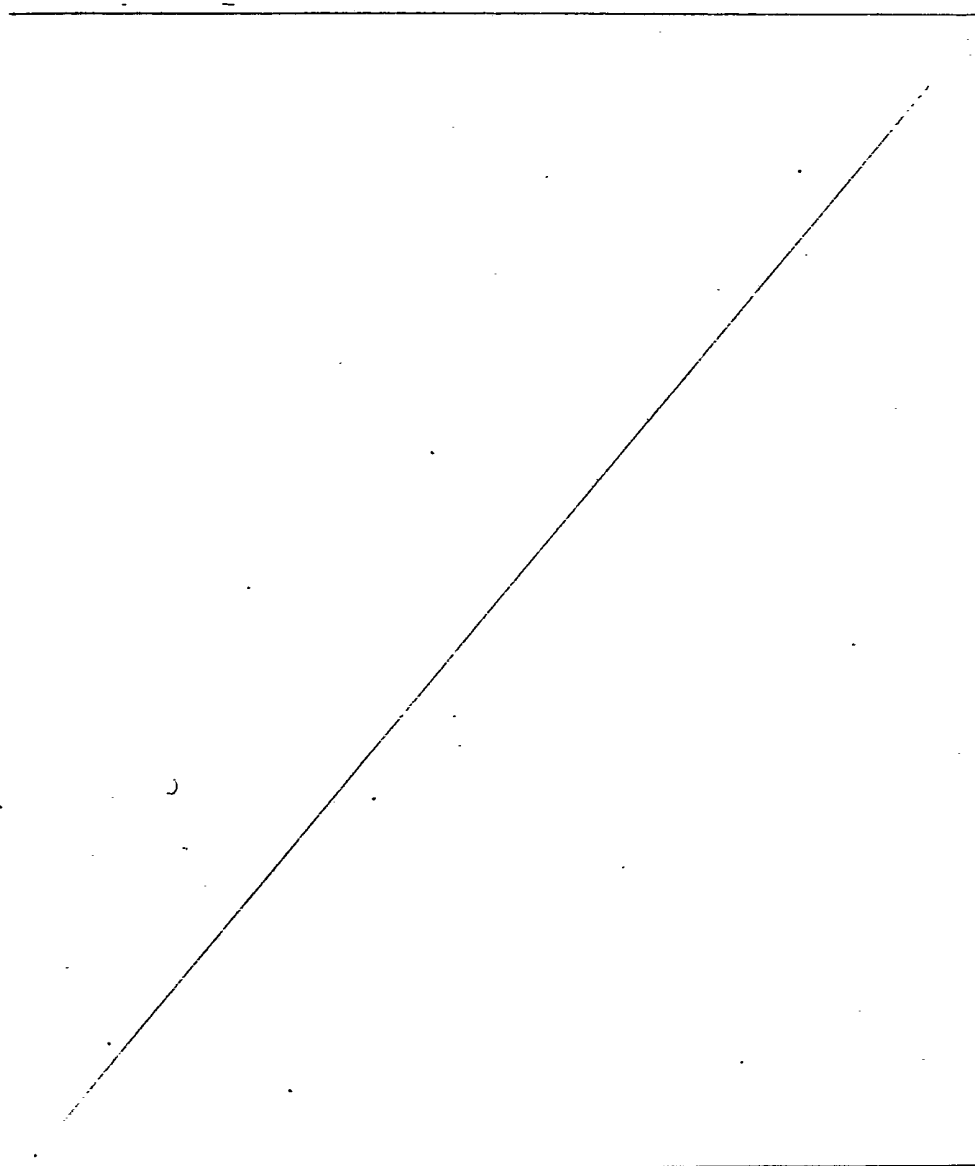

Summary of Experiments #1-4 F-T

TABLE V

Exp.	Catalyst	Step	Activation (under H ₂) flow, 1 atm)	Temp. °C	Reaction Conditions		Detectable HC Product Mixture	Remarks
					Pressure, Psi	CO:H ₂ Ratio		
5	Co ^o -CdA	(1)	204°C, 14hr	182-200	92	1:1	propane, ~12% propylene, ~88%	fast deactivation accompanied by formation of some CH ₄
		(2)	25°C, 4 hr	217	82	1:24	propane, 30-40% propylene, ~60% undetected product, 10-0%	fast deactivation, higher conversion
10		(3)	250°C, 6hr	223	80	1:24	propane, 40% propylene, 60%	lower conversion
		(4)	295°C, 16hr	294	82	1:24	traces C ₃	
15		(5)	--	220-250	94	1:1	mainly CH ₄ traces C ₂ , C ₃	
			287				C ₁ - C ₅ (see Fig. 5)	higher conversion
20	Co ^o -CdA		200°C, 5hr	151	95	1:1	propylene, 100%	no deactivation during 17.5 hr.
	Co-A		200°C, 5hr	150 185	93	1:1	-- traces of propylene	
	Co ^o -CdY		200°C, 9.5hr	152	95	1:1	mainly CH ₄ traces C ₂ -C ₄	slightly higher conversion after 5.5hr
			182				mainly CH ₄ and C ₄ -C ₆ (see Fig. 5)	

It will be understood that, in the catalyst preparation, drying, after incorporation of the transition metal, can be achieved in a variety of ways, so long as superfluous reductant metal, by which is meant all reductant metal not incorporated in the zeolite, or retained within the zeolite channels, is removed.

5

It is believed that our catalyst will function under the same pressure and temperature limitations as conventional Fischer-Tropsch catalyst, i.e., above about one atmosphere pressure and below about 400°C.

10

What is claimed is:

1. A Fischer-Tropsch type catalyst comprising a particulate synthetic zeolite catalyst support having a pore size in the range of 2-10⁰Å, which has ion exchange properties, within which there is incorporated, by ion exchange, at least one reducible transition metal having catalytic properties effective in the conversion of CO and H₂ to hydrocarbon products, said transition metal being reduced by the vapor of at least one preselected reductant metal having a reduction potential greater the reduction potential of said transition metal at a temperature below about 800⁰C.

2. A Fischer-Tropsch catalyst according to Claim 1 wherein said reducible transition metal is cobalt and said vaporized metal reductant is Cd.

3. The method of preparing a Fischer-Tropsch catalyst comprising in sequence: (a) contacting a particulate synthetic zeolite catalyst support having a pore size in the range of 2-10⁰Å with a solution of a salt of a reducible transition metal having catalytic properties effective in the conversion of CO and H₂ to hydrocarbon products, (b) drying to eliminate substantially all water from the zeolite pores, (c) reducing a substantial proportion of the transition metal within the dried reducible metal solution-treated zeolite prepared per step (b) by exposure to the vapor of a reductant metal, (d) heating the product of step (c) to remove superfluous reductant metal from said product of step (c), and (e) cooling under vacuum or in an inert atmosphere to a temperature below about 200⁰C.

4. A method of effecting a Fischer-Tropsch synthesis comprising contacting a mixture of H₂ and CO with a catalyst having a composition according to Claim 1 at a temperature below about 400⁰C under a pressure above about one atmosphere.

5. A method of effecting a Fischer-Tropsch synthesis producing a substantial amount of propylene according to Claim 4 wherein said catalyst according to Claim 1 embodies Co as the transition metal, Cd as the reductant metal and a crystalline synthetic zeolite A as the catalyst support.

6. A method for effecting a Fischer-Tropsch synthesis according to Claim 4 wherein said catalyst according to Claim 1 is one of the group consisting of $\text{Co}^0\text{-CdA}$ and $\text{Co}^0\text{-CdY}$.

7. A method of effecting a Fischer-Tropsch synthesis producing a substantial amount of $\text{C}_4\text{-C}_7$ hydrocarbons according to Claim 4 wherein said catalyst according to Claim 1 embodies Co as the transition metal, Cd as the reductant metal and a crystalline synthetic zeolite Y as the catalyst support.

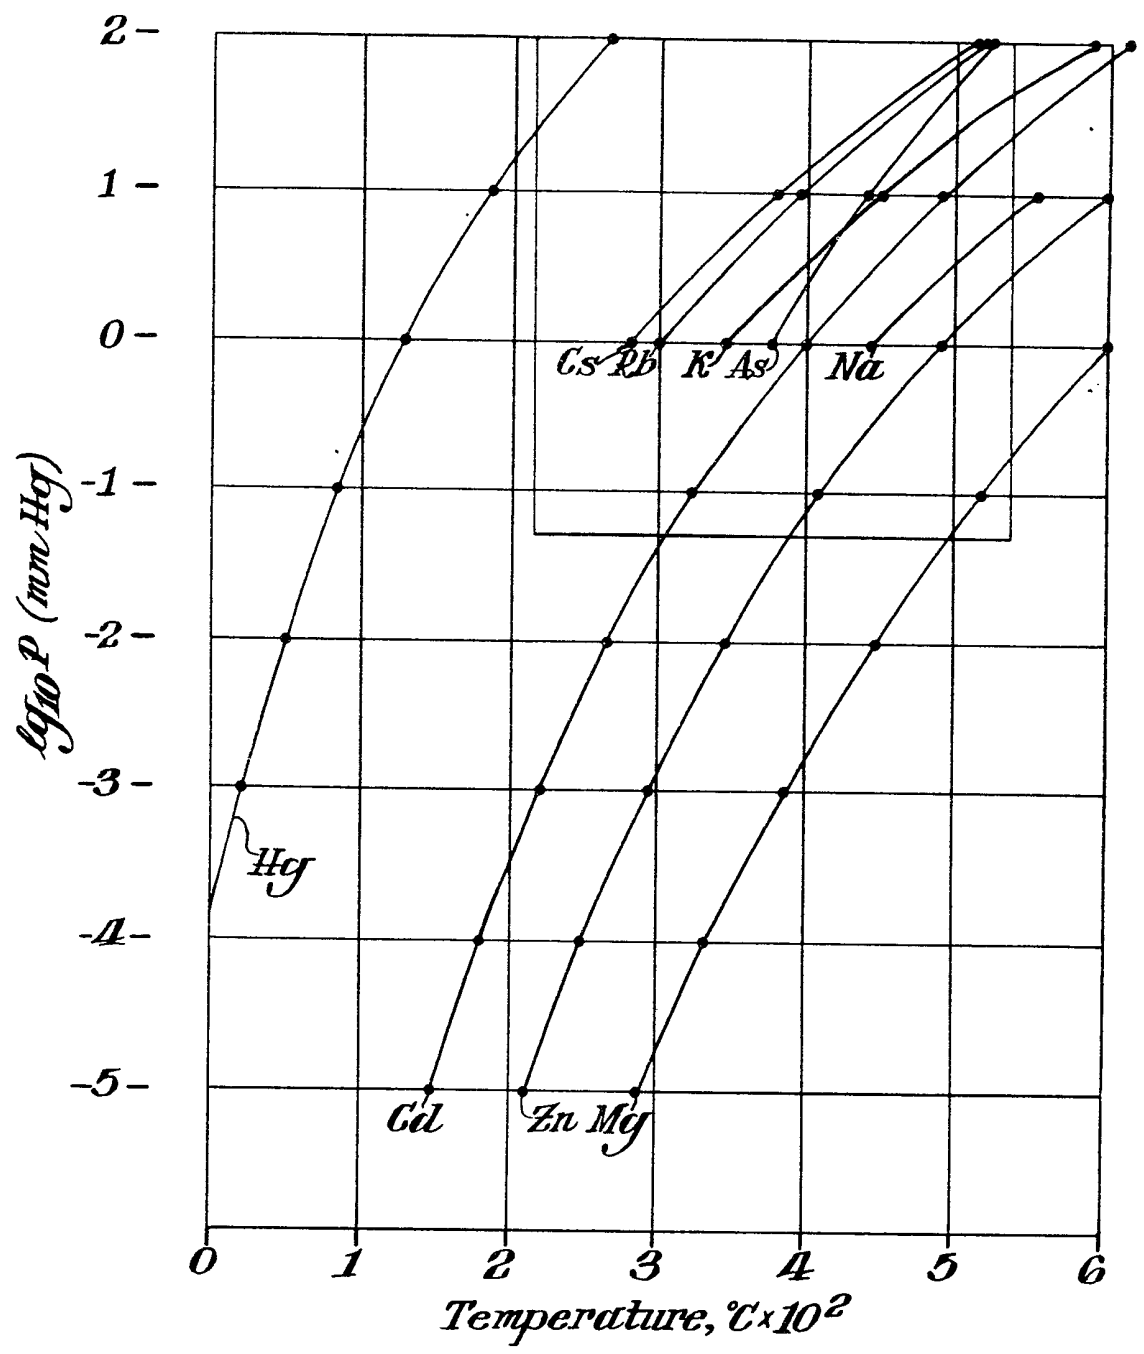


Fig.1.

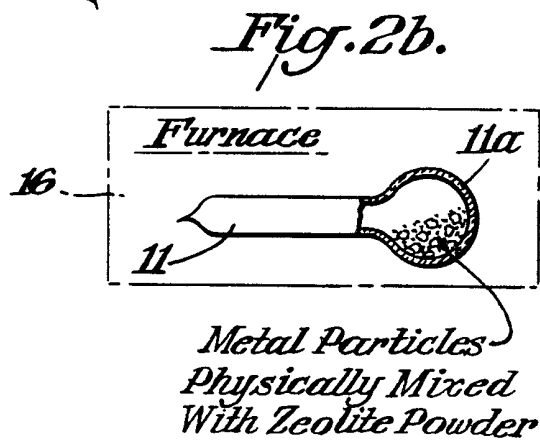
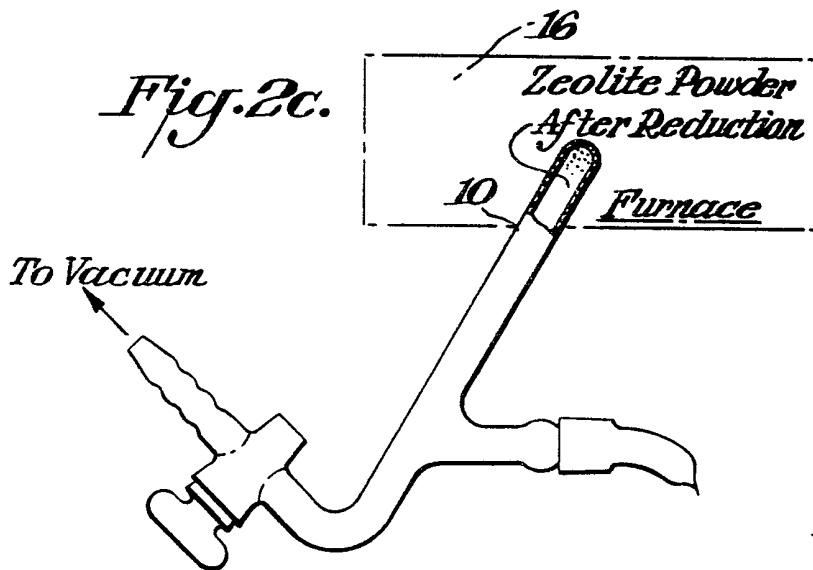
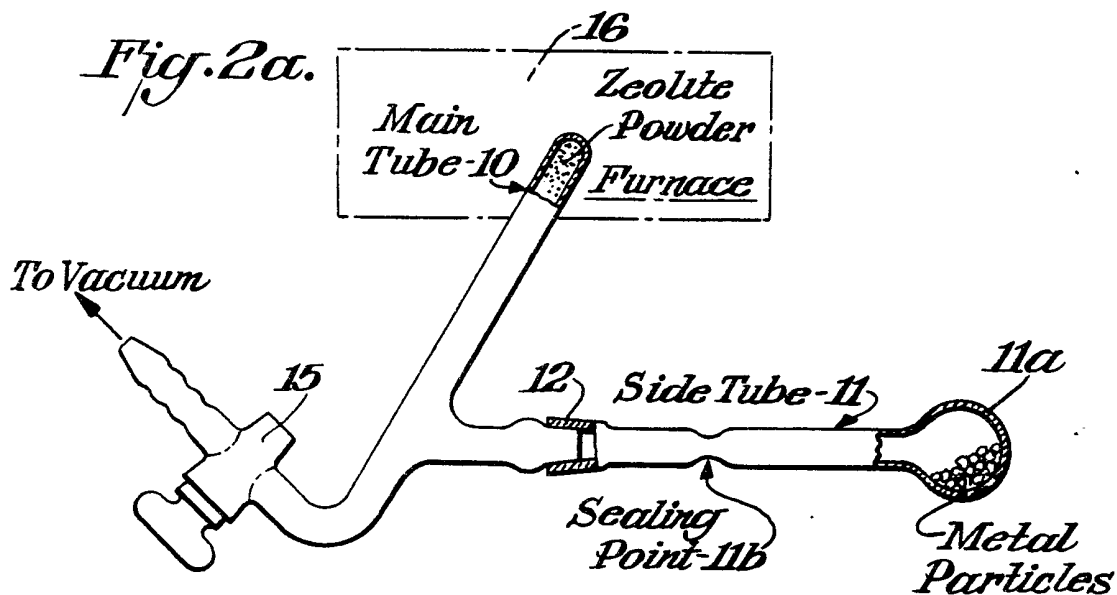


Fig. 3.

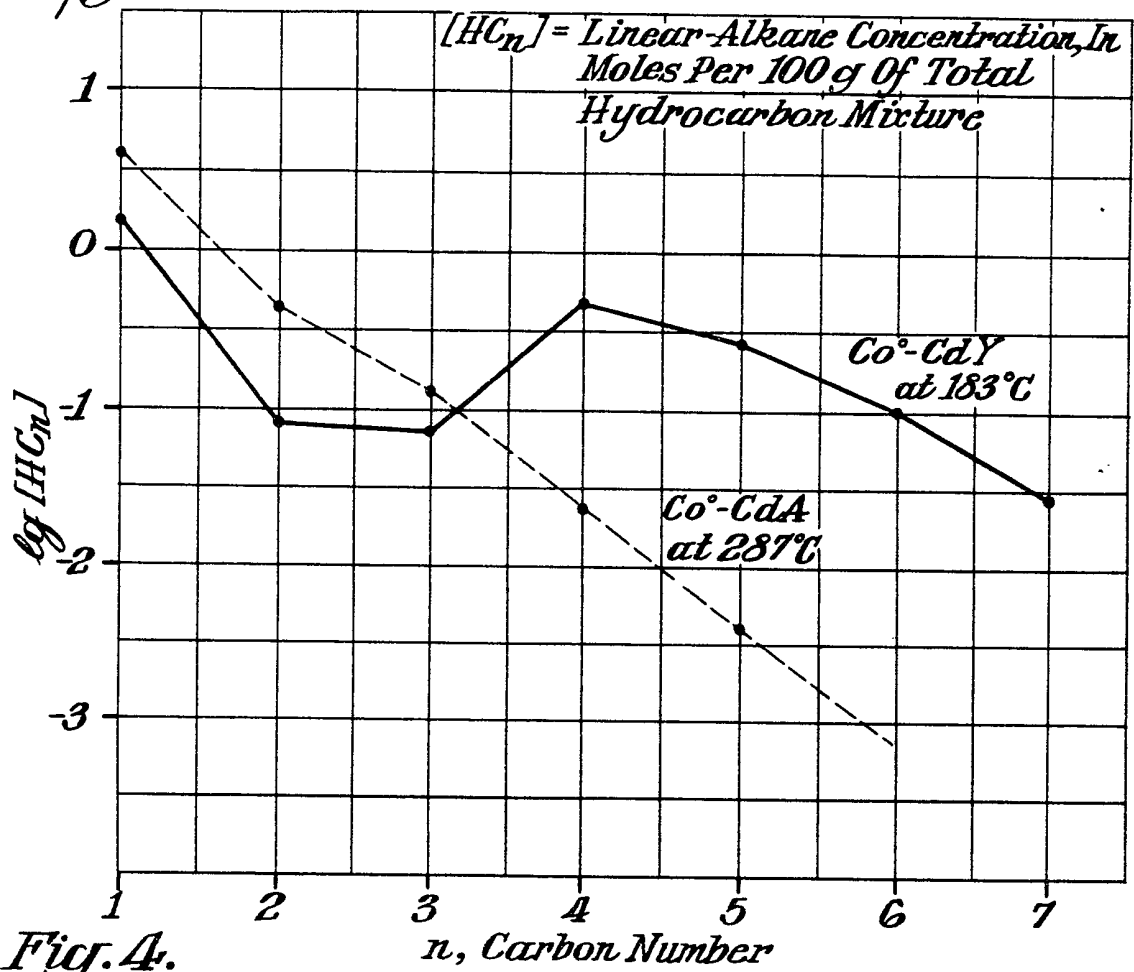
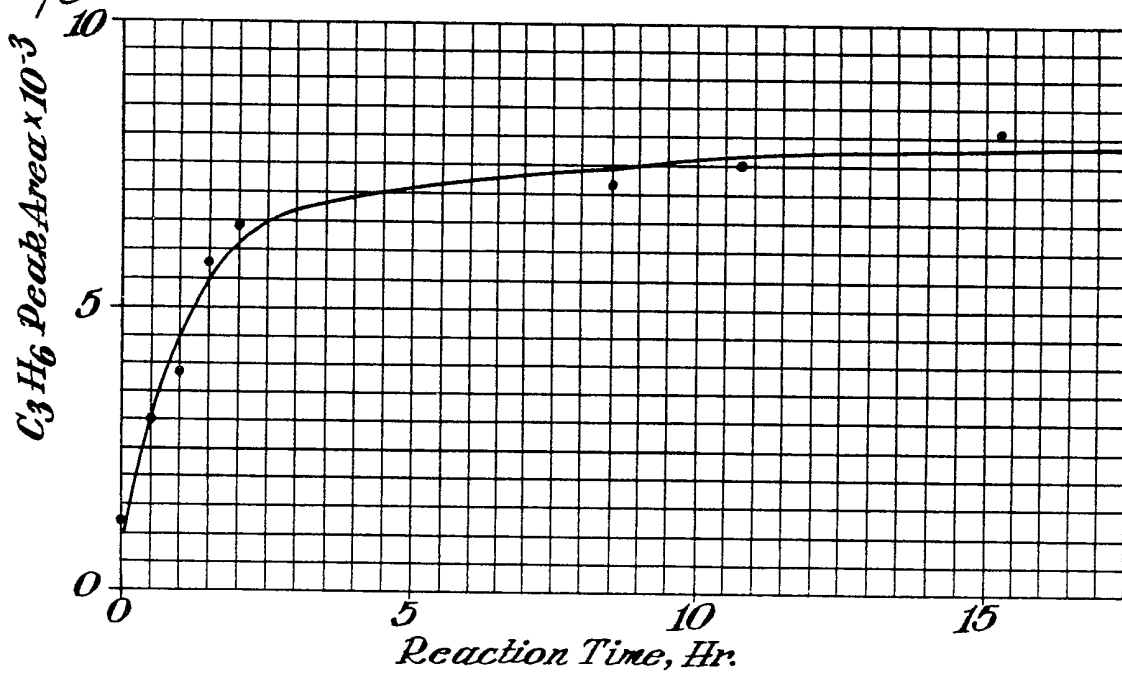


Fig. 4.



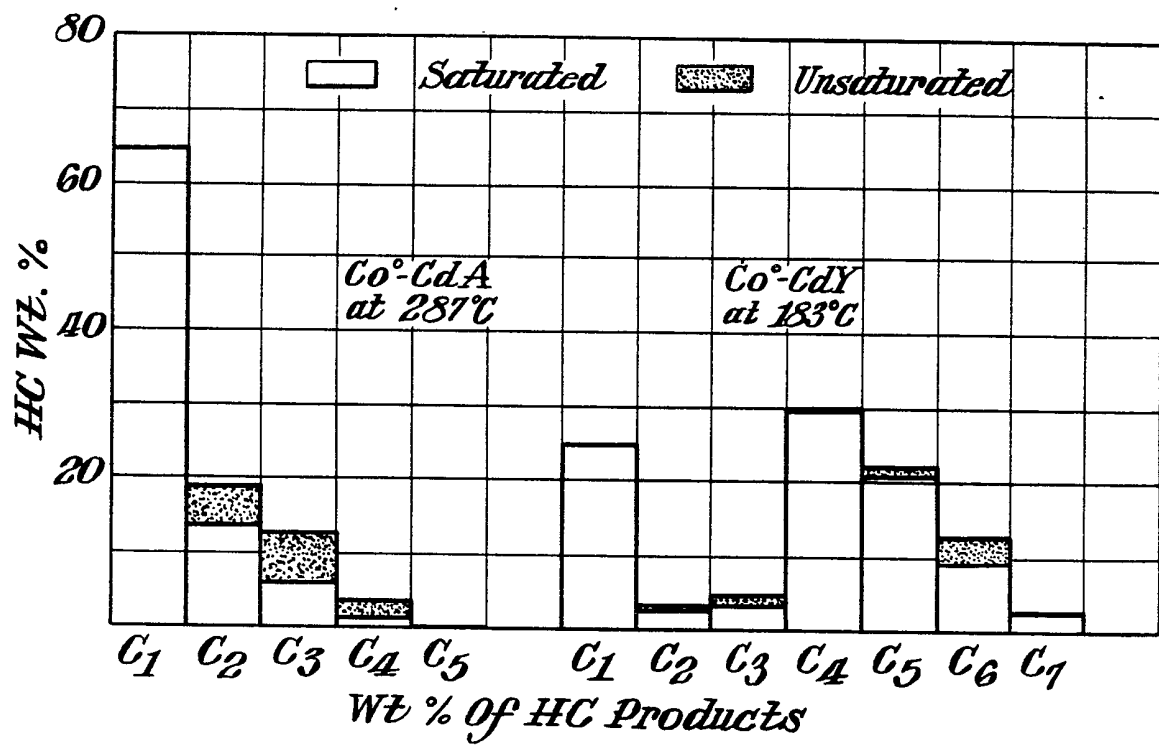


Fig. 5.



DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
	<p><u>US - A - 3 013 990</u> (BRECK)</p> <p>* column 8, lines 51-66; column 10, lines 71-75; column 11, lines 1-5 *</p> <p>--</p>	1,3	<p>B 01 J 29/06 29/14 29/34 37/16</p> <p>C 07 C 1/04</p>
	<p><u>GB - A - 937 748</u> (UNION CARBIDE)</p> <p>* Page 2, lines 41-97 *</p> <p>--</p>	1,3	
PX	<p>JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, vol. 102, no. 7, March 26, 1980, D. FRAENKEL et al. "Shape-selective fischer-tropsch synthesis catalyzed by zeolite-entrapped cobalt clusters", pages 2478-80</p> <p>--</p>	1-7	<p>TECHNICAL FIELDS SEARCHED (Int. Cl.³)</p> <p>B 01 J 29/06 29/14 29/30 29/34 37/16</p> <p>C 07 C 1/04</p>
A	<u>US - A - 3 013 983</u> (BRECK)		<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons</p>
A	<u>US - A - 3 013 984</u> (BRECK)		

<p><input checked="" type="checkbox"/> The present search report has been drawn up for all claims</p>			<p>&: member of the same patent family, corresponding document</p>
Place of search	Date of completion of the search	Examiner	
The Hague	12-02-1981	WENDLING	