

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 85301041.1

22 Date of filing: 15.02.85

51 Int. Cl.<sup>4</sup>: **C 01 B 3/48**  
**C 10 K 1/06, C 01 C 1/04**  
**C 10 J 3/46**

43 Date of publication of application:  
24.09.86 Bulletin 86/39

84 Designated Contracting States:  
DE FR GB IT NL SE

71 Applicant: **TEXACO DEVELOPMENT CORPORATION**  
2000 Westchester Avenue  
White Plains New York 10650(US)

72 Inventor: **Jahnke, Frederick Charles**  
2 Winthrop Street  
Rye, N.Y. 10580(US)


72 Inventor: **Crouch, William Bernard**  
95 Valley View Road  
Chappaqua, N.Y. 10514(US)

72 Inventor: **Gulko, George Morris**  
10555 Turtlewood Ct. No. 305  
Houston Texas 77072(US)

74 Representative: **Burnside, Michael et al,**  
**Michael Burnside & Partners 2 Serjeants' Inn Fleet Street**  
London EC4Y 1HL(GB)

54 **Synthesis gas generation with control of ratio of steam to dry gas.**

57 The mol ratio of steam to dry gas in a synthesis gas containing H<sub>2</sub> and CO, can be controlled within a predetermined range suitable for use with a water gas shift catalyst. A first portion of hot crude synthesis gas from generation (11) is cooled by indirect heat exchange in (13) and then scrubbed with aqueous liquid in first scrubbing operation (31). A second portion of hot crude synthesis gas from generator (11) is quenched with aqueous liquid at (15). The scrubbed first portion from (31) and the quenched second portion from (15) are scrubbed in second scrubbing operation (25) giving product synthesis gas having a predetermined mol ratio of steam to dry gas (e.g. from 0.8:1 to 1.3:1) in line (19). The temperature or flow rate of product gas in line (19) is used to control the flow rate of the quenched second portion from (15) to (25) via line (19), and thereby to maintain the derived predetermined mol ratio of steam to dry gas.

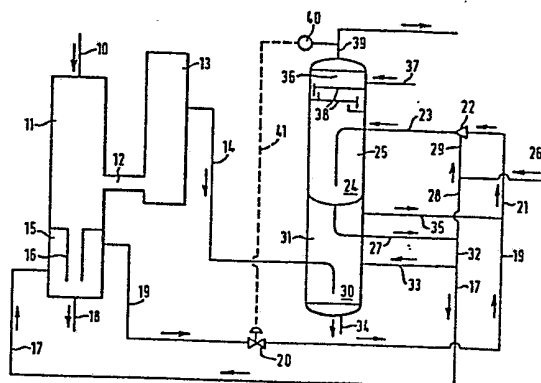

This invention relates to the production of synthesis gas by partial oxidation of hydrocarbon charge.

As is well known to those skilled in the art, it is possible to form synthesis gas by partial oxidation of a carbon-containing charge composition in the presence of steam and oxygen-containing gas to yield product containing principally carbon monoxide and hydrogen with lesser quantities of carbon dioxide and steam as well as other components including hydrogen sulfide; carbonyl sulfide, nitrogen, methane, inert gases, etc. It is desired, in many instances, to pass this gas to a water-gas shift reactor wherein carbon monoxide and water react to form carbon dioxide and hydrogen.

In prior practice, utilizing water-gas shift catalysts typified by iron oxide or by cobalt-molybdenum catalysts, it has been found desirable to control the mole ratio of steam to dry gas in the charge to water gas shift reactor at a mole ratio of above 1.4 and typically about 1.4 - 1.5, say 1.5. However, new catalysts, typified by high activity cobalt-molybdenum catalysts, permit shift section design to be modified, permitting co-production of high pressure export steam, thus improving overall energy utilization. These new catalysts require less steam than do the prior art catalysts; and typically these new catalysts require that the predetermined mole ratio be 0.8-1.3, preferably 1.0 - 1.1, say about 1.0.

It has not been found to be possible to readily attain this mole ratio with prior art synthesis gas configurations.

It is an object of this invention to provide a novel process for synthesis gas production. Other objects  
5 will be apparent to those skilled in the art.

In accordance with certain of its aspects, this invention is directed to a method of partially oxidizing a carbon-containing charge fuel in the presence of  
10 temperature moderator and an oxygen-containing gas thereby forming a hot synthesis gas containing carbon monoxide and hydrogen;

cooling a first portion of said hot synthesis gas by indirect heat exchange thereby forming a partially  
15 cooled first portion of said hot synthesis gas;

contacting a second portion of said hot synthesis gas with a body of aqueous liquor in a quench operation thereby forming a partially cooled second portion of said hot synthesis gas;

20 scrubbing said partially cooled first portion of said hot synthesis gas with aqueous scrubbing liquor in a first scrubbing operation thereby forming a further cooled first portion of said hot synthesis gas;

25 scrubbing said further cooled first portion of said hot synthesis gas and said partially cooled second portion of said synthesis gas in a second scrubbing operation in contact with aqueous liquor thereby forming a combined final product synthesis gas having a predetermined mole ratio of steam to dry gas;

withdrawing said final product synthesis gas having a predetermined mole ratio of steam to dry gas as a final product stream; and

controlling the flow of said partially cooled second portion of said hot synthesis gas to said second scrubbing operation in accordance with the temperature or flow of said combined final product synthesis gas stream exiting said second scrubbing operation thereby maintaining the predetermined mole ratio of steam to dry gas in said final product synthesis gas.

The charge carbon-containing fuel which may be employed in the process of this invention may include a fossil fuel such as a solid coal, a liquid hydrocarbon, or a gaseous fuel such as natural gas.

The charge to the process of this invention includes carbonaceous fuels which are solid at ambient temperature and which contain ash. Typical of such fuels are coals including anthracite, bituminous, sub-bituminous, lignite, coke from coal, petroleum coke, particulate carbon, tar sand, asphalt, pitch, residue from coal liquefaction, etc. Typically, these fuels may contain ash in amounts as little as 0.1w% - 0.5w% or as much as 20w% - 40w%. They may also contain water in amounts as low as 0 w% - 10 w% or as much as 30 w% - 40 w% or more. Although the charge fuel may be used without reducing the moisture content, it is preferred, to facilitate grinding and

slurrying in the case of those fuels containing large amounts of water, to pre-dry the fuel to a moisture content to 2 w% - 20 w% depending on the nature of the fuel.

5       The charge fuel may be ground to a particle size so that preferably 100w% passes through a 14 mesh sieve and greater than 50w% has a particle size within the range of 14-325 mesh sieve. In the case of some pitches, asphalts, and tar sand, it may be possible to feed them as liquids by heating them to just below their decomposition temperature.

10      The ground solid fuel may be employed as charge; but preferably it is slurried in a liquid vaporizable hydrocarbon or water, or it is entrained in a gaseous medium.

15       The preferred slurrying agent is water; and it is preferably present in the charge to gasification in amount of 30 - 120 parts per 100 parts of solid coal or coke.

Alternatively, the ground solid fuel may be entrained in a gas such as steam, carbon dioxide, nitrogen, recycle synthesis gas, air, etc.

20       Typical liquid hydrocarbons which may be employed include various oils derived from petroleum including distillates and residues such as crude petroleum, reduced crude, gas oil, cycle gas oil, coker gas oil, furfural extract of coker gas oil, etc; oil derived from

25      coal, tar sands, lignite; etc. Such liquids may be employed in the form of a slurry which includes 100 parts of solid coal or coke with 40 - 150 parts, preferably 50 - 100 parts, say 55-60 parts of liquid.

The charge carbonaceous fuel may be a hydrocarbon gas typified by narrow boiling-range refinery off-gas streams, lower alkanes, natural gas, etc.

5 In the preferred embodiment, the charge fuel may be a hydrocarbon liquid including gas oils, etc. or more preferably heavier stocks including short resid (bottoms from vaccum distillation), pitch, an asphalt from a solvent deasphalting operation, etc.

10 A typical pitch which may be charged as a liquid or a solid may have the following properties:

TABLE

	<u>Property</u>	<u>Value</u>
	Composition w%	
	C	85.94
15	H	9.49
	S	2.40
	N	1.40
	O	0.47
	Ash	0.01-0.5
20	°API	-14.6 (1.210 g/cm <sup>3</sup> )
	Viscosity Cst @ 150°C.	1,000
	Viscosity Cst @ 250°C.	30

A typical short resid may have the following properties:

TABLE

	<u>Property</u>	<u>Value</u>
5	Composition w%	
	C	84.65
	H	9.96
	S	4.50
	N	0.39
10	O	0.40
	Ash	0.10
	°API	12.8 (0.981 g/cm <sup>3</sup> )
	Viscosity Cst ° 50°C	1000

If desired, there can also be charged a supplemental temperature moderator to moderate the temperature in the reaction zone. Moderators may be necessary when the charge includes liquid vaporizable hydrocarbons in order to simultaneously achieve desired conversion level (optimum efficiency) and temperature (fixed by materials of construction). When employed, they may be admitted with any of the charge streams or separately. Typical temperature moderators may include superheated steam, saturated steam, carbon dioxide-rich gas, cooled exhaust from downstream turbines, nitrogen-in-air, by-product nitrogen from a conventional air separation unit, etc.

Charge also includes a free-oxygen-containing gas. Typical of such gases which contain at least about 21 w% oxygen include air, oxygen-enriched air (containing more than 21 w% oxygen), substantially pure (e.g. greater than 95 w%) oxygen, etc. Commonly, this gas contains oxygen plus other gases derived from the air from which the oxygen was prepared.

Total charge commonly contains the following parts by weight:

10

TABLEParts

<u>Component</u>	<u>Broad</u>	<u>Preferred</u>	<u>Typical</u>
Fuel	-	-	100
Slurrying			
15 Liquid	0-150	30-120	60
Oxygen-containing			
Gas, atoms of free			
oxygen per atom of			
carbon	0.7-1.6	0.8-1.4	0.95
20 Moderator	0-200	30-100	50
Total Water	40-150	40-100	75

When the charge fuel is a liquid or a gas, no slurrying liquid is admitted with the charge.

The atomic ratio of oxygen (in the free-oxygen-containing gas) to carbon (in the fuel) may be 0.7 - 1.6. When the oxygen-containing gas is substantially pure oxygen, the ratio may be 0.7 - 1.5, preferably 0.9. When it is air, the ratio may be 0.8 - 1.6, say 1.3. When water



is the temperature moderator as in the case when liquid hydrocarbon is used as slurring medium, the weight ratio of water to carbon in the fuel may be 0 - 2.0, preferably 0.2 - 0.6, say 0.5.

5                   In typical operation according to one embodiment, the total charge might contain 100 parts of ground anthracite, 60 parts of water as slurring fluid, no temperature moderator, and sufficient air to attain an atom ratio of 1.3 free oxygen to carbon in the fuel. In another  
10                   embodiment, in the total charge may contain 100 parts of ground bituminous, 100 parts of light cycle gas oil, 160 parts of superheated steam and sufficient enriched air containing 80 w% oxygen to attain a ratio of 1.0 free oxygen atoms per atom of carbon in the fuel.

15                   In a more preferred embodiment utilizing a liquid hydrocarbon charge, the total charge might contain 100 parts SDA pitch from a solvent deasphalting operation, no slurring fluid, 40 parts of superheated steam as  
20                   temperature moderator, and sufficient oxygen (99 w% purity) to attain a ratio of 0.95 free oxygen atoms per atom of carbon in the fuel.

                  In practice of the process of this invention, the carbon-containing charge is heated to 25°C - 300°C, say 250°C prior to admission to gasification; and the  
25                   free-oxygen-containing gas may be heated to 25°C - 500°C, say 80°C. When employed, the supplemental temperature moderator may be heated to 25°C - 300°C, say 270°C.

                  The charge materials, including free-oxygen-containing gas and moderator are admitted to a

-9-

partial oxidation synthesis gas generation, typified by that set forth in USP 2,818,326 to Texaco as assignee of Eastman et al. This generator includes an annulus-type burner (such as is typified by that set forth in USP 2,928,460 or 4,328,006 or 4,328,008) in a vertical cylindrical steel pressure vessel lined with a thermal refractory material.

As the charge components are admitted to the reaction vessel-combustion chamber, incomplete combustion is effected to yield a product hot raw gas which principally contains hydrogen, carbon monoxide, steam and carbon dioxide. Other materials which may typically be present may include hydrogen sulfide, carbonyl sulfide (COS), methane, ammonia, nitrogen, and inert gases typified by argon.

The principal gaseous components, in the product may include the following (volume % on a dry basis) when substantially pure oxygen is fed to the combustion chamber:

TABLE

<u>Component</u>	<u>Broad</u>	<u>Typical</u>
Carbon Monoxide	30-60	51
Hydrogen	5-40	43
Carbon Dioxide	5-35	5
Hydrogen Sulfide + COS	0-5	0.6
Nitrogen	0-5	0.2
Methane	0-2	0.3
Inert Gases	0-1.5	0.3

When air replaces the pure oxygen, the composition may be as follows (volume % dry basis):

TABLE

<u>Component</u>	<u>Broad</u>	<u>Typical</u>
Carbon Monoxide	10-35	18
Hydrogen	2-20	12
5 Carbon Dioxide	5-25	7
Hydrogen Sulfide + COS	0-3	0.5
Nitrogen	45-70	62
Methane	0-2	0.1
Inert Gases	0.1-1.5	0.8

10           The autogenous temperature in the combustion chamber of the gas generation zone may be 1100°C - 1600°C, say 1400°C at 0.7 to 10.5 MPa, preferably 3.5 to 8.5 MPa, say 6.25 MPa. Residence time for gasification may be 1 - 10 seconds, preferably 1 - 7 seconds, say about 2 - 5  
15 seconds.

When the charge includes a solid, such as a coal, the product synthesis gas contains a particulate ash phase containing up to about 20 w% of the organic carbon in the feed and typically about 1 w% - 8 w%, say 4 w%.

20           The hot raw product synthesis gas leaves typically through a centrally positioned outlet in the bottom of the reaction zone, the outlet being coaxial with the central longitudinal axis of the reaction zone-gas generator. The gas stream is split and a portion passes downwardly through  
25 a bottom outlet zone and then is admitted to the upper portion of a radiant cooler. The temperature of the gas as it is admitted to the radiant cooler is 1100°C - 1600°C, say 1400°C. The linear velocity of the gas

decreases as it enters the radiant cooling operation which is preferably located directly below and is coaxial with the central vertical axis of the reaction zone of the gas generator.

The radiant cooling chamber includes a lining and a means for removing radiant heat impinging on the liner. This preferably includes a heat exchange surface made up of a series of connected tubes arrayed preferably parallel to the main axis of the chamber. Heat exchange fluid passes through these tubes.

During passage of the synthesis gas through the radiant cooling chamber, it is cooled by radiation typically to  $1000^{\circ}\text{C}$  -  $1200^{\circ}\text{C}$ , say  $1100^{\circ}\text{C}$ . Ash contained therein is projected by velocity and gravity heads in a downward direction to permit it to pass along the axis of the cooling chamber toward the outlet. The tubes of the radiant cooling chamber may undesirably collect ash depositing thereon; and to minimize this, there may be provided a plurality of soot-blowing nozzles spaced adjacent to the tubes by means of which steam or inert gas may be directed onto the tubes to thereby remove ash and soot which deposits thereon.

The ash is preferably directed downwardly through and out of the radiant cooling chamber into an ash collection zone wherein the ash is cooled and collected.

When the carbon-containing charge is a gas or liquid (generally characterized by a lower ash content than is found in the case of solid charge), the combustion

chamber may not contain a radiant cooling chamber; and cooling is effected as hereinafter set forth.

In practice of the process of this invention, a first portion of the hot synthesis gas is withdrawn from the combustion chamber at 1100°C. - 1600°C, say 1350°C. and 0.4 to 10.5 MPa, say 6.25 MPa. This first portion may be 15 -35 v%, say about 25 v% of the total synthesis gas generated in the combustion chamber.

The first portion of the hot synthesis gas may be passed to a waste heat boiler wherein it is passed in indirect heat exchange against water as it is cooled to 280°C. - 400°C., say 350°C. at 0.3 to 10.1 MPa, say 6.0 MPa.

The so-cooled first portion of the gas may then be passed through a first particulate scrubbing operation wherein by contact with aqueous scrubbing liquid, it is further cooled to 150°C - 250°C, say 200°C. at 0.3 to 10.1 MPa, say 6.0 MPa.

The second portion of the cooled synthesis gas (preferably containing 65 - 85 v%, say 75 v% of the total synthesis gas generated in the combustion chamber) which leaves the bottom portion of the combustion chamber at 1100°C - 1600°C, say 1350°C is preferably passed downwardly through a constricted channel below the lower portion of the combustion chamber. It is then passed into a quenching operation wherein it is contacted with a body of aqueous liquid. In the preferred embodiment it is bubbled through the body of aqueous liquid in the quench chamber. This serves to remove a portion of the solid

particulate from the gas and to cool this gas to about 150°C - 300°C, say 250°C.

It is desirable to provide for continuous or periodic removal of particulates from the quench operation.

In practice of the process of this invention, the second portion of the cooled synthesis gas which leaves the quench chamber as a partially cooled second portion of synthesis gas (at 150°C. - 300°C., say 250°C. and 0.25 to 10.1 MPa, say 6.28 MPa) is passed to a second scrubbing operation wherein it is contacted with aqueous liquor. There is also admitted to the second scrubbing operation (at 150°C. - 250°C., say 200°C. and 0.3 to 10.1 MPa, say 6.0 MPa) the scrubbed first portion of the synthesis gas exiting the first scrubbing operation. In the preferred embodiment, these streams may be combined (prior to admission to the second scrubbing operation) to form a combined stream at 150°C. - 300°C., say 230°C. and 0.25 to 10.1 MPa, say 5.95 MPa.

There is also admitted to the second scrubbing operation, 15 -150 parts, say 55 parts of fresh scrubbing aqueous liquor at 100°C. - 300°C., say 250°C. and 5 - 50 parts, say 18 parts of recycle aqueous liquor (per 100 parts wet gas by weight) at 150°C. - 300°C., say 250°C.

Preferably the aqueous scrubbing liquor is admixed with the mixed charge gas stream to the second scrubbing operation prior to admission thereto; mixing may be effected as by passing the gas stream through an eductor to which the liquid stream is admitted.

In the second scrubbing operation, the synthesis gas admitted thereto is contacted with a pool of aqueous liquor derived from the aqueous liquor admitted therewith. During scrubbing, the gas is cooled to 150°C. - 300°C., say 230°C. at 0.2 to 10.0 MPa, say 5.8 MPa.

The aqueous liquor from the second scrubbing operation is withdrawn as from a lower portion thereof; a portion (0 - 75 v%, say 25v%) may be recycled to the second scrubbing operation and the remainder passed as aqueous  
0 liquor at 150°C. - 300°C., say 250°C. to the first scrubbing operation and to the quench operation. The aqueous liquor may be withdrawn from the latter two operations and withdrawn from the system.

The combined gas in the second scrubbing  
5 operation, after contact with the pool of aqueous liquor is preferably passed upwardly through a countercurrent contact zone which may include a plurality of trays over which aqueous liquor is passing and descending downwardly into the lower portion of the second scrubbing operation.  
0 The aqueous liquor admitted to this countercurrent contact zone is preferably a stream different from that admitted to the lower portion of the second scrubbing zone. In a preferred embodiment (per 100 parts of synthesis gas at 150°C. - 300°C., say 230°C. and 0.2-to 10.0 MPa, say  
5 5.8 MPa admitted to the second scrubbing zone), there may be admitted 5 -100 parts, say 25 parts of liquor at 100°C. -300°C., say 200°C. and 0.2 to 10.0 MPa, say 5.8 MPa with the gas.

Combined final product synthesis gas leaving the top of the countercurrent contact zone at 100°C. - 300°C., say 225°C. and 0.16 to 9.92 MPa, say 5.8 MPa is characterized by a predetermined steam to dry gas mole ratio of 0.8 - 1.3:1, say 1.0:1.

It is a feature of the process of this invention that this predetermined ratio of steam to dry gas may be maintained by controlling the split of the two streams of gas leaving the synthesis gas generation operation.

- ) Specifically the amount of gas in the second portion of the synthesis gas leaving the quenching operation (i.e. the partially cooled second portion of the synthesis gas) is controlled in accordance with the characteristics of the product synthesis gas leaving the overhead from the countercurrent contacting operation.

- ) This is effected by measuring a desired property (e.g. the flow rate or preferably the temperature) of the gas and controlling the flow of the partially cooled second portion of the hot synthesis gas to the second scrubbing operation in accordance with that property of the final product synthesis gas exiting the second scrubbing operation. By measuring the flow (i.e. the temperature, the actual flow rate, the actual ratio of steam to dry gas, etc) it is possible to effect the desired control.

In typical operation, the product synthesis gas leaving the second scrubbing operation containing carbon monoxide, hydrogen, steam, and carbon dioxide and lesser quantities of methane, argon, nitrogen, hydrogen sulfide, and carbonyl sulfide may be characterized by a mole ratio



of steam to dry gas of 1.00 at a temperature of 228°C, a pressure of 6.0 MPa, and flow rate of 2064 Kg mols per hour.

This is effected by passing 25v% of the synthesis gas formed in the combustion chamber through indirect heat exchange, first scrubbing operation and thence to second scrubbing operation, and 75v% of that synthesis gas through the quench operation and thence directly to the second scrubbing operation.

If, due to external factors, the flow at the outlet of the second scrubbing operation dropped to say 1996 mols per hour with all other independent factors remaining constant, it would be found that the ratio of steam to dry gas at this point would undesirably be 0.93:1. As the change in flow is measured, a control signal is generated which opens the valve in the line carrying the partially cooled second portion of synthesis gas exiting the quench chamber and passing to the second scrubbing operation thereby increasing the flow of gas therein so that it corresponds to 75v% of the synthesis gas formed in the combustion chamber.

In an alternative embodiment, the measurable property of the stream may be the temperature. If it be found for example that the temperature has dropped from the desired level of 228°C to say 222°C,, it would be found that the ratio would be 0.82:1. As the change in temperature is measured by the temperature control mechanism, a control signal is generated which opens the valve in the line carrying the partially cooled second

portion of synthesis gas exiting the quench chamber and passing to the second scrubbing operation, thereby increasing the flow of gas therein so that it corresponds to 75v% of the synthesis gas formed in the combustion

5 chamber which in turn returns the steam to dry gas ratio to the desired value.

In similar manner, the control signal may be generated in accordance with other properties or characteristics of the stream including the actually  
10 measured ratio of steam to dry gas, etc. each measured by use of standard measuring instruments.

In this manner, it is thus possible to control the desired ratio of steam to dry gas so that it may be at the proper level for use as feed to a syngas shift  
15 operation wherein carbon monoxide is reacted with water to produce carbon dioxide and hydrogen.

Practice of the process of this invention will be apparent to those skilled in the art from the attached drawing and the following description of the best mode  
20 presently known of carrying out the process of this invention.

The attached drawing is a schematic process flow diagram of the best mode presently known of practicing the process of this invention.

In practice of the process of this invention according to the best mode presently known, there is charged through line 10, the "typical pitch" set forth above in amount of 100 parts at 260°C. Also admitted through line 10 are 109 parts of 99.6 v% oxygen and 41 parts of steam at 290°C and 7.0 MPa. The atomic ratio of carbon to oxygen in the charge is 1.08:1 .

In gasification vessel 11 (fitted with a thermally resistant lining which defines a combustion chamber), incomplete combustion is effected to yield a product hot raw synthesis gas containing the following parts by volume (dry basis):

TABLE

	<u>COMPONENT</u>	<u>VOL %</u>
20	Carbon Monoxide	51
	Hydrogen	43
	Carbon Dioxide	5
	Hydrogen Sulfide + COS	0.6
	Nitrogen	0.2
25	Methane	0.3
	Argon	0.3

The combustion chamber 11 has an average temperature of 1350°C. at 6.3 MPa. A first portion (containing 25 v% of the synthesis gas produced in chamber

11) is withdrawn through line 12 to indirect heat exchanger 13 - a waste heat boiler. Here the gas is cooled by indirect heat exchange against boiler feed water to 340°C. at 6.1 MPa. The partially cooled first portion of the hot synthesis gas is withdrawn from indirect heat exchanger 13 through line 14.

A second portion of the synthesis gas, containing 75 v% of the synthesis gas generated in combustion chamber 11 is passed at 1350°C. and 6.3 MPa to quench chamber 15 wherein it is passed downwardly through conduit 16 into contact with a body of aqueous liquid admitted through line 17. Liquid may be drawn off as desired through line 18.

The second portion of synthesis gas leaving quench chamber 15 through line 19 at 240°C. and 6.27 MPa is passed through control valve 20 in line 19 and thence through line 21 to eductor 22 and line 23 to the lower portion 24 of second scrubbing operation 25.

There is also admitted to scrubbing operation 25 fresh aqueous liquid at 200°C. through line 26 and recycle aqueous liquor at 225°C. withdrawn from the lower portion 24 of second scrubbing operation 25 through line 27 and passed through lines 28 and 29.

In this embodiment, the partially cooled first portion of the synthesis gas in line 14, at 340°C. and 6.1 MPa, is passed to the lower portion 30 of first scrubbing operation 31 wherein it is scrubbed with aqueous scrubbing liquid from lines 27, 32, and 33. Liquid may be drawn off through line 34.

The further cooled first portion of the synthesis gas at 200°C. and 6.06 MPa is withdrawn through line 35 from which it is passed to line 21.

5 The liquid stream of aqueous scrubbing liquid in line 29 is preferably passed to second scrubbing operation 25 through venturi contactor 22 to which synthesis gas from line 21 is admitted. Additional scrubbing is effected in the lower portion 24 of second scrubbing operation 25.

10 In the preferred embodiment, the scrubbed gas leaving lower portion 24 is passed upwardly to upper portion 36 wherein the gas is further scrubbed by scrubbing liquor (preferably condensate from the water gas shift operation) entering through line 37 and passing across liquid-vapor contact trays 38. The synthesis gas stream 15 leaving through line 39 at 228°C. and 5.85 MPa is characterized by a mole ratio of steam to dry synthesis gas of 1.0:1 and by a composition (dry basis) as follows:

TABLE

	<u>COMPONENT</u>	<u>VOL %</u>
20	Carbon Monoxide	51
	Hydrogen	43
	Carbon Dioxide	5
	Hydrogen Sulfide + COS	0.1
	Nitrogen	0.1
25	Methane	0.3
	Argon	0.2

Control of this steam to dry gas mole ratio is effected in this embodiment by a temperature control element 40 which measures the temperature of the stream in

line 39. When the temperature in line 39 increases, e.g. to 229°C, (i.e. 1°C. more than the desired 228°C.), a signal is generated, schematically shown as passing through control line 41, which activates valve 20 whereby the valve is closed to thereby lessen the flow therein so that the quantity of gas flowing through line 19 is decreased and the new quantity is 75 v% of the total generated in operation 11. Similarly, if the measuring element 40 indicates that the temperature has decreased, the signal which is generated, activates valve 20 so that the quantity of gas passing therethrough is increased. In this manner, the temperature (and thus the mole ratio of steam to dry gas) is maintained at the desired level.

In an alternate less preferred embodiment, the control valve 20 may be activated by a change in the rate of flow of the stream in line 39.

It is a feature of the process of this invention that it may be characterized by the following advantages:

- (i) it permits operation in a manner to maintain the desired mole ratio of steam to dry gas at predetermined level;
- (ii) it accomplishes this objective in a simple manner utilizing a minimum of controls;
- (iii) it permits use of desired variables (temperature, rate of flow, composition of gas, etc.) to effect the stated result;
- (iv) it requires minimum capital and operating cost;
- (v) it permits operation with one scrubbing vessel for two gas streams;

(vi) it permits operation by measurement of a clean stream rather than by measurement of the soot-containing streams leaving the quench operation or the indirect heat exchanger; etc.

CLAIMS

1. A method for controlling the mol ratio of steam to dry gas in synthesis gas obtained by partially oxidizing a carbon-containing fuel with an oxygen-containing gas, optionally in  
5 the presence of a temperature moderator characterized in that a first portion of said hot synthesis gas is cooled by indirect heat exchange and then scrubbed with aqueous scrubbing liquor in a first scrubbing operation;

10 a second portion of said hot synthesis gas, is quenched with a body of aqueous liquid; said cooled and scrubbed first portion of hot synthesis gas and said quenched second portion of said synthesis gas are scrubbed with  
15 aqueous liquor in a second scrubbing operation thereby forming a final product synthesis gas having a predetermined mol ratio of steam to dry gas; and

20 the flow of said quenched second portion of hot synthesis gas to the second scrubbing operation is controlled in accordance with the temperature or flow of the final product synthesis gas thereby maintaining the said predetermined mol ratio of steam to dry gas.

25 2. A method according to claim 1 characterized in that the first and second portions of hot synthesis gas respectively comprise 15 to 50 of the volume %, and 85 to 50 volume % total of hot synthesis gas.



3. A method according to claim 1 or 2 characterized in that said first portion of hot synthesis gas is cooled by indirect heat exchange to 280°C-400°C.

5 4. A method according to claim 3 characterized in that the first portion of hot synthesis gas is cooled in the first scrubbing operation to a temperature of 150 to 300°C.

10 5. A method according to any preceding claim characterized in that the second portion of hot synthesis gas is cooled by quenching to a temperature of 200 to 280°C.

15 6. A method according to any preceding claim characterized in that the final product synthesis gas has a temperature of 170 to 240°C.

7. A method according to any preceding claim characterized in that the predetermined mol ratio of steam to dry gas in the final product synthesis gas is from 0.8:1 to 1.3:1

20 8. A method according to any preceding claim characterized in that said first and second scrubbing operations are carried out in an upstanding attenuated scrubbing vessel comprising a first scrubbing portion for scrubbing the  
25 first portion of hot synthesis gas;

a second scrubbing portion for scrubbing the cooled and scrubbed first portion of hot synthesis gas and the quenched second portion of synthesis gas;

means for measuring the temperature or rate of flow of final product synthesis gas leaving the second scrubbing portion, and for generating a signal corresponding to said measurement; and

5 means for controlling the rate of flow of quenched second portion of synthesis gas from said quench operation to said second scrubbing portion, in accordance with said signal, whereby to maintain said predetermined mol ratio of steam  
10 to dry gas in the final product synthesis gas.

9. Apparatus for scrubbing gases characterised in that said apparatus comprises:

an upstanding attenuated scrubbing vessel having a first scrubbing portion (31) for scrubbing a first portion of hot gas;

a second scrubbing portion (25) for scrubbing partially scrubbed gas from said first scrubbing portion, as well as a second portion of gas, having an outlet (39) for a final product gas having a predetermined mol ratio of steam to dry gas;

means (40) for measuring the temperature or rate of flow of said final product gas from said outlet and for generating a signal corresponding to said measurement; and

means (20) for controlling the flow of said second portion of gas to said second scrubbing portion (25) in accordance with said signal, thereby maintaining said predetermined mol ratio of steam to dry gas in said final product gas.

10. Apparatus for generating synthesis gas containing carbon monoxide and hydrogen, and having a predetermined mol ratio of steam to dry gas, characterised in that said apparatus comprises;

a gasification vessel (11) for partially oxidizing a carbon-containing fuel thereby forming hot crude synthesis gas containing carbom monoxide and hydrogen;


an indirect heat exchanger (13) for cooling a first portion of said hot crude synthesis gas;

a quench chamber (15) for cooling a second portion of said hot crude synthesis gas;

an upstanding attenuated scrubbing vessel according to Claim 9, means (14) for conducting said first portion from said indirect heat exchanger (13) to said first scrubbing portion (31) of said upstanding attenuated scrubbing vessel and means (19,21,23) for conducting said second portion from said quench chamber (15) to said second scrubbing portion (25)

of said upstanding attenuated scrubbing vessel.

11. Apparatus according to Claim 9 or 10 characterised in that said measuring means (40) is a means for measuring temperature.

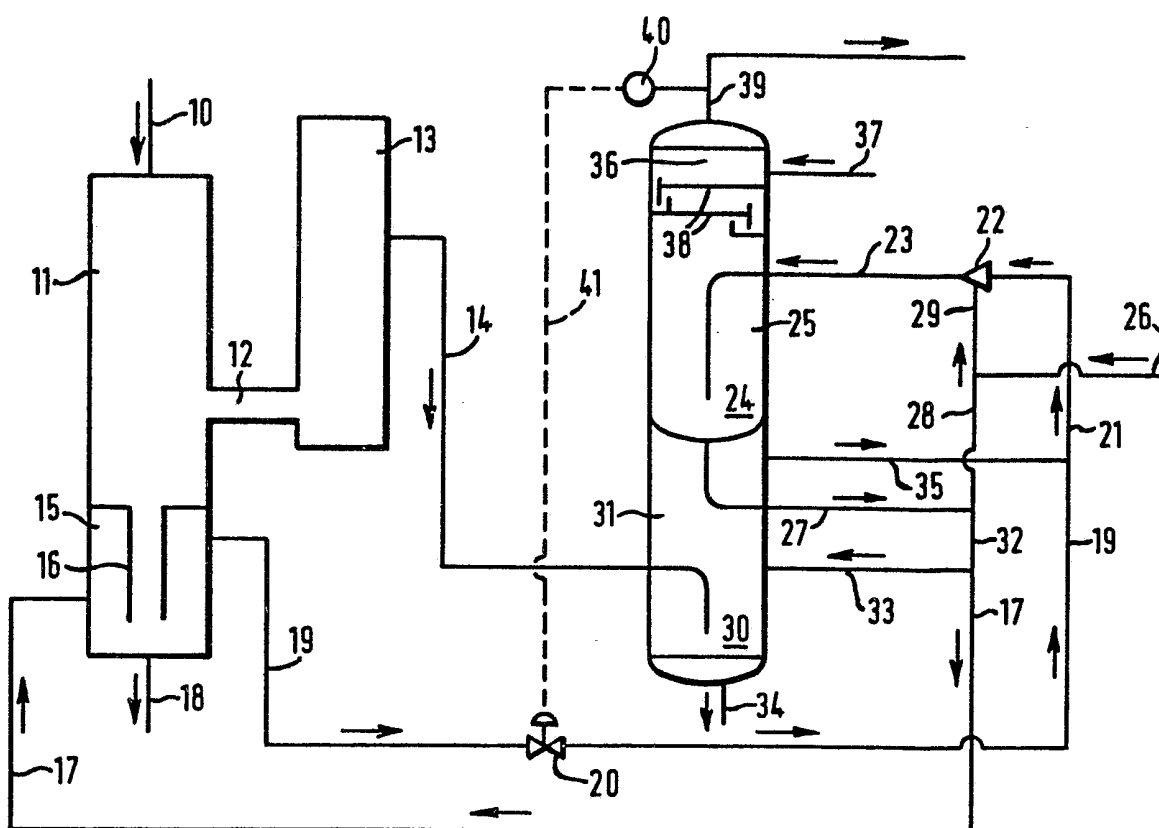



European Patent  
Office

# EUROPEAN SEARCH REPORT

0195139

Application number

EP 85 30 1041

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
E	US-A-4 502 869 (F.C. JAHNKE et al.) * Whole document *	1-11	C 01 B 3/48 C 10 K 1/06 C 01 C 1/04 C 10 J 3/46
A	EP-A-0 051 138 (TEXACO DEVELOPMENT CORP.)		
A	US-A-4 202 167 (R.M. SUGGITT)		
A	GB-A-2 061 244 (G. GIAMMARCO et al.)		
A	DE-A-3 016 876 (N. DEUSER)		
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			C 01 B C 01 C C 10 K C 10 G C 10 J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 07-10-1985	Examiner PYFFEROEN K.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	