



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B01J 20/28, 35/00, C07C 1/02	A1	(11) International Publication Number: WO 00/69556 (43) International Publication Date: 23 November 2000 (23.11.00)
(21) International Application Number: PCT/US00/13955 (22) International Filing Date: 19 May 2000 (19.05.00) (30) Priority Data: 09/314,708 19 May 1999 (19.05.99) US (71) Applicant: ELTRON RESEARCH, INC. [US/US]; 4600 Nautilus Court South, Boulder, CO 80301-3241 (US). (72) Inventors: VAN CALCAR, Pamela; 2300 South Rock Creek Pkwy #2-104, Superior, CO 80027 (US). MACKAY, Richard; 1000 Willow Place, Lafayette, CO 80026 (US). SAMMELLS, Anthony, F.; 2145 Knollwood Drive, Boulder, CO 80302 (US). (74) Agents: SULLIVAN, Sally, A. et al.; Greenlee, Winner and Sullivan, P.C., Suite 201, 5370 Manhattan Circle, Boulder, CO 80303 (US).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: IMPROVED MIXED IONIC AND ELECTRONIC CONDUCTING CERAMIC MEMBRANES FOR HYDROCARBON PROCESSING (57) Abstract <p>The invention relates to mixed phase materials for the preparation of catalytic membranes which exhibit ionic and electronic conduction and which exhibit improved mechanical strength compared to single phase ionic and electronic conducting materials. The mixed phase materials are useful for forming gas impermeable membranes either as dense ceramic membranes or as dense thin films coated onto porous substrates. The membranes and materials of this invention are useful in catalytic membrane reactors in a variety of applications including synthesis gas production. One or more crystalline second phases are present in the mixed phase material at a level sufficient to enhance the mechanical strength of the mixture to provide membranes for practical application in CMRs.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

IMPROVED MIXED IONIC AND ELECTRONIC CONDUCTING CERAMIC MEMBRANES FOR HYDROCARBON PROCESSING

BACKGROUND OF THE INVENTION

5 A class of brownmillerite-derived materials have been found to be mixed ionic and electronic conductors (MIEC). See: PCT/US96/14841, filed September 13, 1996. Gas-impermeable membranes made from MIECs behave as short-circuited electrochemical cells, in which oxygen anions and electrons conduct in opposite directions through the membrane. The oxygen anion conductivity of these materials make them useful for the efficient
10 generation of pure oxygen which can be employed in catalytic oxidation reactions. The electronic conductivity of these materials provides for spontaneous gas phase separation and any subsequent oxidation without the addition of external electronic circuitry. MIEC membranes have found application in catalytic membrane reactors (CMRs) for a variety of processes where oxygen reacts with inorganic or organic species, such as hydrocarbons,
15 including but not limited to the partial oxidation of methane and other hydrocarbons to synthesis gas, the oxidative coupling of aliphatic and aromatic hydrocarbons, and the gasification of coal. CMR processes also include decomposition of organic environmental pollutants such as PCBs. These membranes can simply be used for the separation of oxygen from oxygen-containing gas (e.g., air) and the production of pure oxygen.

20 In operation, the ceramic membranes of CMRs are exposed to net oxidizing and reducing atmospheres on opposite sides of the membrane. The stresses imposed on the ceramic membranes arise from chemical expansion as well as thermal expansion. The membranes may also be exposed to significant pressure differentials up to about 500 psi. While reactor design can be optimized to minimize these stresses, brittleness and cracking of
25 membrane materials after short term operation is a significant problem. Thus, there is a need in the art for ceramic membrane materials, particularly for long-term reactor operation, that retain excellent ionic and electronic conductivities and which, in addition, exhibit improved mechanical strength under reactor operating conditions.

SUMMARY OF THE INVENTION

30 This invention relates to ceramic compositions for use in ceramic membranes which contain multiple crystalline phases wherein the predominate phase is a MIEC. The ceramic compositions contain one or more second crystalline phases distinct from the MIEC phase which do not significantly contribute to ionic or electronic conductivity, but which enhance

the mechanical strength of the composition. Mechanical strength of membrane made of these mixed phase materials is enhanced, particularly under CMR operating conditions. The presence of one or more second phases in a ceramic material significantly enhances the mechanical strength of the composition for use as a membrane in CMR applications. MIEC materials in general can be strengthened by the addition of second phases to decrease their brittleness and facilitate their practical application in CMRs. The mechanical strength of MIEC membranes that contain mixed ionic and electronic conducting brownmillerite-derived ceramics are particularly benefitted by the introduction of second phases.

In preferred ceramic compositions, the MIEC phase of the ceramic materials of this invention represents about 80wt% or more of the composition. In more preferred compositions, the MIEC phase represents about 90wt% or more of the composition. Lower levels (up to about 5wt%) of second phases can arise as impurities during the preparation of MIEC materials, because of impurities in starting material resulting in inaccuracies in measurement of metal stoichiometries prior to reaction. Second phases can be selectively added to MIEC up to about 20wt% by mixing components in off-stoichiometric amounts, i.e., by adding additional amounts of one or more metal precursors. The amount of second phase(s) which can be present in the final ceramic products (membranes) and improve their mechanical properties can vary most generally between about 0.1wt% and about 20wt%.

More specifically, mixed phase ceramic materials combining an MIEC phase from about 80wt% to about 99wt%, and a second phase or phases from about 1wt% to about 20wt% are useful for producing improved membranes of this invention. A more preferred composition is 90 to 99 wt% MIEC phase and 1 - 10 wt% second phases.

Ceramic membranes of this invention can have any shape, form or dimensions suitable for use in various CMRs. In particular, membranes can be tubes of various diameters and lengths and flat plates or disks of various diameters. Ceramic membranes can be substantially composed of mixed phase ceramic as a dense material with membrane thicknesses ranging from about 0.5 to about 2mm. Alternatively, gas impermeable membranes can be composed of a porous substrate supporting a dense thin film of the mixed phase ceramic, typically having a film thickness of about 1 μm to about 300 μm , more preferably having a thickness of 10 μm to about 100 μm .

Preferred mixed phase materials of this invention contain a sufficient amount of second phase to provide enhanced mechanical properties to the material (compared to a

corresponding single-phase MIEC material) without significant detrimental effect upon the ionic and electronic conductivity of the mixed phase material. More specifically, in preferred mixed phase materials, the amount of the second phase(s) present is optimized to reduce breakage from handling and cutting in the preparation of membranes and to reduce breakage and cracking of membranes or thin films associated with thermal and chemical shock to the membrane during CMR operation. Further, the second phase(s) preferably do not substantially react with reactive gases during CMR operation to cause decomposition and failure of the membranes.

Mixed phase materials of this invention include those that contain about 1wt% or more of second phases, those that contain about 2-4wt% or more of second phases and those that contain 5wt% or more of second phases. Preferred second phases are pseudo-binary and pseudo-ternary phases formed from the same (or fewer) elements as the mixed conductors. The second phases need not be ionic or electronic conductors and they need not be in thermodynamic equilibrium with the MIEC materials.

MIEC brownmillerite-derived ceramics are of general composition:



where A is an element from the f block lanthanide elements; A' is an element selected from the Group 2 elements, A'' is an element from the f block lanthanide or Group 2 elements; B is an element selected from Al, Ga, In or mixtures thereof; B' and B'' are different elements and are selected independently from the group of elements Mg, and the d-block transition elements, including Zn, Cd, or Hg; $0 < x < 2$, $0 < x' < 2$, $0 < y < 2$, $0 < y' < 2$ where $x + x' \leq 2$ and $y + y' \leq 2$, and z varies to maintain electroneutrality. A'' and B'' may or may not be present.

The lanthanide metals include the f block lanthanide metals: La, Ce, Pr, Nd, Pm, Sm, Eu, Gd, Tb, Dy, Ho, Er, Tm, Yb, and Lu. Yttrium has properties similar to the f block lanthanide metals and is also included herein in the definition of lanthanide metals. A is preferably La or Gd, with La more preferred. Group 2 metal elements of the Periodic Table (also designated Group 2a) are Be, Mg, Ca, Sr, Ba, and Ra. The preferred Group 2 elements for the A' element of the materials of this invention are Ca, Sr and Ba and Sr is most preferred. The more preferred B elements are Ga and Al, with Ga more preferred. The d block transition elements include Sc, Ti, V, Cr, Mn, Fe, Co, Ni, Cu, and Zn. Preferred B' and

B'' elements are Mg, Fe and Co, with Fe and Co being more preferred as B' and B'', respectively.

The value of z in the above formula depends upon the values of x, x', y and y' and the oxidation states of the A, A', A'', B, B' and B'' elements. The value of z is such that the mixed metal oxide material is charge neutral. In preferred materials, $0 < z < 1$.

In preferred MIEC materials of this formula $0.05 < x < 1$, $1 < x' < 1.95$, $0.25 < y < 1.2$, and $0.8 < y' < 1.75$. In more preferred MIEC materials of this formula $0.2 < x < 0.6$, $1.4 < x' < 1.8$, $0.6 < y < 1.0$, and $1.0 < y' < 1.4$.

Second phases employed in the ceramic materials of this invention improve the mechanical strength of the MIEC materials and are not significantly detrimental to their electrical properties. Second phases are structurally distinct from the MIEC phases. Second phases can include phases of the AB_2O_4 structure type, such as $SrAl_2O_4$, and the A_2BO_4 structure type, such as Sr_2AlO_4 . More generally, second phases can include the quaternary and ternary phases $(A, A')_2(B, B')O_4$, $A'_2(B, B')O_4$, $(A, A')(B, B')_2O_4$, $A'(B, B')_2O_4$, $A_2(B, B')O_4$, $A(B, B')_2O_4$, $(A, A')_2BO_4$, $(A, A')_2B'O_4$, $(A, A')B_2O_4$, $(A, A')B'_2O_4$ and the mixed metal oxides A_2BO_4 , AB_2O_4 , $A_2B'O_4$, AB'_2O_4 , A'_2BO_4 , $A'B_2O_4$, $A'_2B'O_4$, and $A'B'_2O_4$, where A, A', B and B' are as defined above. In these formulas (A, A') and (B, B') are used to indicate all mixtures of the indicated elements. Presence of second phases can be detected using SEM or TEM methods. These methods and X-ray diffraction analysis can also be employed as known in the art to quantify the amount of second phase(s) present. Crystalline second phases can be detected by X-ray diffraction if they are present at levels of about 1wt% or more. The amount of second phase detectable by X-ray diffraction depends upon the specific second phase or phases present. SEM and particularly TEM methods can typically be employed to quantify lower amounts of second phases.

Second phases can be added to the MIEC materials by any method. One method is to add the desired second phase or phases to a substantially single-phase MIEC material in powder form, and mix thoroughly to distribute the second phase homogeneously in the mixture prior to pressing and sintering membranes. Another method is to form the second phase or phases simultaneously with the formation of the desired membrane material by mixing an off-stoichiometric ratio of the starting materials.

BRIEF DESCRIPTION OF THE FIGURES

In the following figures, small arrows on the X-ray diffraction scans indicate peaks believed to be indicative of second phases. The shoulder peak at about 32 is believed to be due to $(\text{Sr}, \text{La})_2(\text{Al}, \text{Fe})\text{O}_4$. Additional peaks which may be observed from this phase are at 24, 42.5, 43.5, 54.5, 55.5, 65 and 76 (2θ) as seen in Fig. 5. The peaks between 28-30 are believed to be due to $\text{Sr}(\text{Fe}, \text{Al})_2\text{O}_4$. Additionally, peaks from this phase which may be observed are at 20.2, 34.5 (2θ) as in Fig. 5.

Figure 1 is an X-ray diffraction scan of the MIEC material of Example 2 which is shown to be single-phase $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$.

Figure 2 is an X-ray diffraction scan of the mixed phase membrane material of Example 3 which is a mixed phase material containing the $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ MIEC phase and about 2-4wt% of second phase(s).

Figure 3 is an X-ray diffraction scan of the mixed phase membrane material of Example 4 which contains an $\text{La}_{0.3}\text{Sr}_{1.7}\text{Al}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ MIEC phase and about 2wt% of second phase(s).

Figure 4 is an X-ray diffraction scan of the mixed phase membrane material of Example 5 which contains an $\text{La}_{0.3}\text{Sr}_{1.5}\text{Al}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ MIEC phase and about 7-8wt% of second phase(s).

Figure 5 is an X-ray diffraction scan of the mixed phase membrane material of Example 6 which contains an $\text{La}_{0.3}\text{Sr}_{1.7}\text{Al}_x\text{Fe}_y\text{O}_{5+z}$ MIEC phase where x is 0.8 -- 0.9 and y' is 1.2 to 1.1 and about 5 - 6% of second phase(s).

Figures 6A and 6B are SEM images of mixed phase material containing $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$. La-deficient phases are the dark grains indicated by arrows. Figures 6A and 6B are images prepared from different samples of the same materials indicating distribution of the La-deficient second phase throughout the material.

Figure 7A is a SEM image of mixed phase containing MIEC $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ indicating the presence of second phases. Figure 7B is a SEM image of mixed phase containing MIEC $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.2}\text{Al}_{0.4}\text{Fe}_{1.4}\text{O}_{5+z}$ indicating the presence of second phases.

DETAILED DESCRIPTION OF THE INVENTION

Mixed ionic and electronic conducting (MIEC) membranes behave as short-circuited electrochemical cells, with appropriate catalysts applied for promoting each half reaction on their respective oxidizing and reducing surfaces. Ionic transport of O^{2-} proceeds from

reducing to oxidizing membrane surfaces with electrons mediating from oxidizing to reducing surfaces via the ceramic membrane.

A catalytic membrane reactor (CMR) has an oxidation zone and a reduction zone separated by a gas-impermeable membrane. The membrane surface in contact with the reduction zone is the reduction surface which optionally has a reduction catalyst layer. The membrane surface in contact with the oxidation zone is the oxidation surface which optionally has an oxidation catalyst layer. The reactor is provided with passageways for entrance and exit of gases from the reduction and oxidation zones. Multiple CMRs can be linked in series or in parallel (with respect to gas flows) for improved efficiency or speed of reaction.

A variety of CMRs are known in the art and can be employed in combination with the improved membranes of this invention. The improved mechanical properties of these membranes herein are particularly useful in systems employing tubular membranes and any other membrane structures or configurations that are subject to enhanced stresses during operation.

PCT application WO98/23051, filed 29 October 1998, which is incorporated in its entirety herein by reference to the extent not inconsistent herewith, describes catalytic membrane reactors having a three dimensional catalyst within the reactor. Catalytic membranes of this invention can be employed in the reactor systems described therein.

In a CMR, an oxygen-containing gas or gas mixture, such as air, is passed in contact with the membrane in the reduction zone, and the reactant gas or gas mixture, i.e., the oxygen-consuming gas, such as a reactant gas containing methane, is passed in contact with the membrane in the oxidation zone. As the oxygen-containing gas or gas mixture contacts the membrane, oxygen is reduced to oxygen anions which are transported through the membrane (as ions) to the membrane oxidation surface, facing the oxidation zone. In the oxidation zone, the oxygen anions react with the oxygen-consuming gas or gas mixture, oxidizing the oxygen-consuming gas and releasing electrons. The electrons return to the membrane reduction surface facing the reduction zone via transport through the membrane.

Membranes of CMRs are employed to form a gas-impermeable, yet ion and electron barrier, between the oxidation and reduction zones of the reactor. Membranes are typically mounted between the reactor zones employing a gas-impermeable sealant. A variety of methods and sealing materials are known in the art. U.S. provisional application 60/129,683,

filed April 16, 1999, provides improved sealant materials for use in CMRs having mixed metal oxide membranes. This provisional application is incorporated in its entirety by reference herein to the extent not inconsistent herewith.

The term "oxygen-containing gas" is used broadly herein to include gases and mixtures of gases in which at least one of the component gases is oxygen or an oxide. The oxygen or oxide component of the gas is capable of being reduced at the reduction surface of the membrane of this invention. The term includes carbon, nitrogen, and sulfur oxides (CO_x , NO_x and SO_x) among others, and gas mixtures in which an oxide is a component, e.g. NO_x , in an inert gas or in another gas not reactive with the membrane. The term also includes mixtures of oxygen in other gases, e.g. O_2 in air. In the reactors of this invention, the oxygen-containing gas is passed in contact with the reduction surface of the membrane and the oxygen-containing component of the gas is at least partially reduced at the reduction surface, e.g., NO_x to N_2 . The gas passing out of the reduction zone of the reactor may contain residual oxygen or oxygen-containing component.

The term "reactant gas" is used broadly herein to refer to gases or mixtures of gases containing at least one component that is capable of being oxidized at the oxidation surface of a reactor of this invention. Reactant gas components include, but are not limited to methane, natural gas (whose major component is methane), gaseous hydrocarbons including light hydrocarbons (as this term is defined in the chemical arts), partially oxidized hydrocarbons such as methanol alcohols (ethanol, etc.) and organic environmental pollutants. Reactant gases include mixtures of reactant gas components, mixtures of such components with inert gases, or mixtures of such components with oxygen-containing species, such as CO , CO_2 or H_2O . The term "oxygen-consuming gas" may also be used herein to describe a reactant gas that reacts with oxygen anions generated at the oxidizing surface of the membrane. Reactant gas also includes gases with suspended or entrained particles, such as carbon particles slurried in water vapor.

The term "oxygen-depleted gas" refers to a gas or gas mixture from which oxygen has been separated by passage through a reactor of this invention (i.e., the residual of the oxygen-containing gas). The term "sweep gas" refers to a gas or gas mixture that is introduced into the oxidation zone of a reactor used for oxygen separation to carry the separated oxygen. The sweep gas may be an inert gas, air or other non-reactive gas that substantially does not contain components that will be oxidized in the oxidation zone of the reactor. The sweep gas

can be applied to mixtures containing some oxygen, such as air, the oxygen content of which will be increased by passage through the oxidation zone of the reactor.

The term "partial vacuum" applies to the application of a partial vacuum, i.e., less than ambient pressure, to the oxidation zone of a reactor and may refer to high or low vacuum depending upon the construction of the reactor. Application of a partial vacuum to the oxidation zone of a reactor used for oxygen separation can be employed to collect gases for ultimate concentration of the separated oxygen. Gases in the oxidation or reduction zones of the CMR can be at ambient pressure or at pressures higher or lower than ambient.

The terms "reactant gas," "oxygen-depleted gas," "oxygen-consuming gas," and "oxygen-containing gas" and any other gas mixture discussed herein include materials which are not gases at temperatures below the temperature ranges of the pertinent process of the present invention or at pressures of the CMR, and may include materials which are liquid or solid at room temperature. An example of an oxygen-containing gas which is liquid at room temperature is steam.

The term "gas-impermeable" as applied to membrane of this invention means that the membrane is substantially impervious to the passage of oxygen-containing or reactant gases in the reactor. Minor amounts of transport of gases across the membrane may occur without detriment to the efficiency of the reactor. It may be that membranes of this invention will allow passage of low molecular weight gases such as H₂. The membranes of this invention conduct oxygen anions and in this sense are permeable to oxygen.

The membrane materials of this invention are mixed phase ceramics. In a crystalline single-phase material, the elements combine in a well-ordered array. The presence of a single-phase can be assessed by XRD or similar known techniques of phase identification (scanning electron microscopy (SEM) or transmission electron microscopy (TEM)). A mixed phase material contains one or more distinct crystalline phases. In the mixed phase materials of this invention, the predominate phase is a material that exhibits both ionic and electronic conductivity (MIEC). The second phase or phases present enhance the mechanical strength of the mixed phase material. Exemplary second phases are mixed metal oxides distinguishable in structure from the predominant MIEC phase. The presence and amounts of second phases in the mixed phase materials of this invention can be assessed by X-ray diffraction or by SEM or TEM techniques.

MIEC phases of this invention more specifically include those of formula:



where x, x', y, y', z, B and B' are as defined above, with B more preferably Ga or Al, and B' more preferably Fe. Preferred materials have $0.05 < x < 1.0$ and $0.25 < y < 1.2$. More preferred materials have $0.20 < x < 0.6$ and $0.30 < y < 1.0$. Second phases that are combined with these specific MIEC include (Sr, La) (B, B')₂O₄ and (Sr, La)₂(B, B')O₄.

In the mixed metal oxides of this invention, Group 2 elements Mg, Ca, Sr, Ba and Ra are believed to be in the 2+ oxidation state. Group 3 elements Al, Ga, and In are believed to be in the 3+ oxidation state. Lanthanides (including lanthanum and yttrium) are believed to be in the 3+ oxidation state. The transition metals in these materials are expected to be of mixed valence (i.e., a mixture of oxidation states) dependent upon the amount of oxygen present and the temperature.

Mixed phase materials of this invention can be prepared by combining starting materials in off-stoichiometric ratios. The term "stoichiometric" refers to the relative amounts of starting metal compounds (e.g., metal oxides or carbonates) combined to obtain a mixed metal oxide of a given formula. Stoichiometric mixing provides the component metals in the correct relative molar amounts according to the mixed metal oxide formula (e.g., $\text{A}_x \text{A}'_{x'} \text{A}''_{2-x-x'} \text{B}_y \text{B}'_{y'} \text{B}''_{2-y-y'} \text{O}_{5+z}$).


The term "off-stoichiometric" refers to the relative amounts of starting materials combined to be somewhat off (i.e., higher or lower) of those required for the formula of the desired MIEC phase.

One or more of the starting components are present in a higher or lower amount than required to obtain the desired stoichiometry of the MIEC phase.


Examples of processes which may be conducted in CMRs using MIEC membranes include the combustion of hydrogen to produce water, the partial oxidation of methane, natural gas or other light hydrocarbons to produce unsaturated compounds or synthesis gas, the partial oxidation of ethane, extraction of oxygen from oxygen-containing gases, e.g., extraction of oxygen from: NO_x, wherein x has a value from 0.5 to 2; SO_y, wherein y has a value from 2 to 3, steam, or CO₂; amoxidation of methane to hydrogen cyanide, and oxidation of H₂S to produce H₂O and S.

The partial oxidation of methane and other hydrocarbons to produce synthesis gas is a spontaneous process to produce either a high value fuel or a feedstream for high value chemicals. This process can be carried out in the presence of CO₂ and steam. When these


ceramic materials are used for the partial oxidation of methane to produce syngas, the reaction can be written:



Coal gasification also produces syngas, but by the combination of steam reforming and partial oxidation of carbon. In this case, the reactant gas can be a slurry of carbon particles in steam. The overall reaction for this process can be written:



A further reaction that can be conducted with CMR is the oxydehydrogenation reaction of ethane, according to the reaction:



Coupling reactions can also be facilitated by these membranes. One example is the coupling of methane to form ethane or ethylene, or of methane and ethane to form propane, and higher alkanes and alkenes. The coupling of toluene ($\text{C}_6\text{H}_5\text{CH}_3$) to form stilbene ($\text{C}_6\text{H}_5\text{CH}=\text{CHC}_6\text{H}_5$), as an intermediate in the formation of benzoic acid, can also be carried out using these membranes.

Partial oxidation and coupling reactions of CRMs can employ unsaturated and saturated linear, branched, and cyclic hydrocarbons, partially oxidized hydrocarbons, as well as aromatic hydrocarbons as reactants. Specific examples include methane, ethane, ethylene, propane, etc., cyclopropane, cyclobutane, cyclopentane, cyclopentene, etc., isobutane, isobutene, methylpentane, etc., and benzene, ethylbenzene, naphthalene, methanol, ethanol, etc. Products of reactions with these various hydrocarbon species will generally depend upon the types of oxidation and or reduction catalysts on the membrane surfaces.

All of the listed examples make use of pure oxygen as a reactant. CMRs may also be used for the separation and production of high purity oxygen. Because these reactions make use of pure oxygen separated from the air by the mixed conducting membrane, there is no nitrogen present, and hence no NO_x compounds are generated. The formation of the products acts a driving force for the permeation of oxygen through the ceramic membrane, as the reaction of oxygen maintains a very low partial pressure of oxygen on the product side. Particularly in the case of coupling reactions, selection of catalysts for the oxidation and/or the reduction surface of the membranes is important to improve production with optimal selectivity.

Another type of process suitable for CMRs, is the reaction of an oxygen-containing gas which is capable of losing oxygen, for example, NO, NO₂, SO₂, SO₃, CO, CO₂, etc. The oxidation zone of the reactor is exposed to a partial vacuum, an inert gas, or a gas that will react with oxygen (e.g., various hydrocarbons). Effective ranges of partial vacuum range from approximately 100 Torr to 10⁻⁶ Torr. An example is where the reactant gas is methane, natural gas, or hydrogen and the oxygen-containing gas is a flue or exhaust gas containing NO_x, and or SO_y, wherein x is 0.5 to 2 and y is 2 to 3. As the flue gas contacts the membrane, any oxygen present or the oxygen in NO_x and/or SO_y is reduced to oxygen anions which are transported through the membrane to the oxidation zone where the oxygen anions react with the oxygen-consuming gas to produce carbon dioxide and water, synthesis gas or olefins, depending on the reaction conditions. Nitrogen gas and elemental sulfur are produced from NO_x and SO_y respectively, in the reduction zone.

In another type of CMR reaction, the oxygen-containing gas is a gas-containing steam (i.e., H₂O gas). As H₂O contacts the membrane, the oxygen of H₂O is reduced to oxygen anions which are transported through the membrane to the oxidation zone where the oxygen anions react with methane or natural gas, for example. The H₂O is reduced to hydrogen gas (H₂) in the reduction zone. The hydrogen gas may be recovered and used, for example, to hydrogenate unsaturated hydrocarbons, provide fuel for an electrical current generating fuel cell, to provide fuel for heating the catalytic membrane reactor of this invention or to provide reactant gas for the process for extracting oxygen from an oxygen-containing gas in accordance with the present invention.

Materials which are co-present in any reactor feed gases may participate in catalytic membrane reduction or oxidation taking place at the membrane of the present invention. When, for example, methane is present with ammonia in the oxidation zone and an oxygen-containing gas is present in the reduction zone, hydrogen cyanide and water can be produced in the oxidation zone. Reactors of the present invention can also be applied to the oxidative reforming of CO₂/CH₄ mixtures to synthesis gas. Other combinations of materials reactive with each other in CMRs to produce a wide range of products are possible and are contemplated as being within the scope of the invention.

Optional Catalysts

It has been found that certain catalysts may be used to significantly enhance the efficiency of the reaction being mediated by the membrane. Catalysts to be used are specific

to each reaction. For example, in the partial oxidation of methane, natural gas, or light hydrocarbons to synthesis gas, the catalyst must be able to dissociatively adsorb the hydrocarbon species, followed by oxygen atom transfer to the dissociatively adsorbed residue. The first requirement is met with catalysts possessing considerable hydrogen affinity (e.g. surface hydride forming ability or surface basicity). Oxygen atom transfer to the residue implies that the catalyst possesses only modest metal-oxygen binding energy and is reversibly reducible. Catalysts possessing these features include the platinum group metals Ni, Pd, Pt, Rh, Ru, Ir, and Os, as well as the first row transition metals Fe, Mn, and Co. Incorporation of these metals or their combinations onto the oxidation surface of oxygen anion conducting membranes provides a strategy for direct partial oxidation of hydrocarbons. Moderation of catalyst activity to avoid coke formation is achieved by the incorporation of metal clusters into ceramics such as CeO_2 , Bi_2O_3 , ZrO_2 , $\text{CaB}_{1-x}\text{B}'_x\text{O}_3$, $\text{SrB}_{1-x}\text{B}'_x\text{O}_3$ or $\text{BaB}_{1-x}\text{B}'_x\text{O}_3$ (where B = 4+-lanthanide ion such as Ce, Tb, or Pr; B' = 3+-lanthanide ion such as Gd or Nd; and $0 < x < 0.2$). Additionally, incorporation of transition metal ions into the B-site of a perovskite, with a basic A-site, will give an active catalyst since the bonding of the metal ion to oxygen will be correspondingly weakened and the oxygen atom transfer activity of the metal ion enhanced. Perovskites possessing the general formula $\text{A}_{1-x}\text{A}'_x\text{B}_{1-y}\text{B}'_y\text{O}_3$ (where A = lanthanide metal ion or Y; A' = alkali or alkaline earth cation and $0 < x < 0.8$; B = transition metal ion such as Fe, Ni, or Co; B' = Ce or Cu, Ag, Au or Pt, Pd, or Ni and $0 < y < 0.3$).

For the reductive decomposition of NO_x and SO_x , as well as for oxygen concentration, perovskites are again favored catalysts. In NO_x decomposition, the catalyst must preferentially adsorb NO_x over O_2 and permit the facile release of adsorbed O atoms. The first requirement is met by the use of the first row transition metal ions including Fe, Co, Ni, and Cu, as well as by group VIII metals such as Ru, Pt, or Pd in the B-site. The second requirement is met by the employment of basic or low melting metals in the A-site (Pb, Bi, or Sb, lanthanides or Group IA and IIA dopants) as well as by the use of Ru or Group IB metals (Ag or Au) as a B-site dopant. These conditions are expected to produce generally weak M-O bonds, permitting the required surface and bulk mobility of oxygen ions. In addition, catalysts such as transition metals (Cu, Ag, Au, Pd, Pt, Rh, Ir, Os) supported on metal oxides, (e.g. Fe_2O_3 , Co_2O_3 , Fe_3O_4 , NiO, Ni_2O_3 , MnO, MnO_2) and prepared by various methods such as coprecipitation, impregnation, etc., are expected to be active.

SO_x decomposition may be promoted in a similar manner to NO_x decomposition, but the issue of sulfur tolerance arises. In that case, materials based on the Group VIB metals (Cr, Mo, and W) such as WS₂ or WC or on the Group VIII metals (Fe, Co, Ni, and Cu) such as the thioperovskites ABS₃ (where A is a lanthanide and B is a Group VIII metal),
 5 thiospinels AB₂S₄ (where A is a 2⁺ Group VIII ion and B is a 3⁺ Group VIII ion) or Chevrel phases A₂MO₆S₈ (where A is Fe, Co, Ni, Cu, Zn) are applicable. Similar requirements for oxygen reduction as for NO_x reduction point to the use of similar perovskite catalysts.

H₂S decomposition is similar to that of SO_x decomposition. The preferred catalysts for this process are thiospinels AB₂S₄ (where A is a 2⁺ Group VIII ion and B is a 3⁺ Group
 10 VIII ion) or WS₂.

Previous work examining oxygen desorption using Temperature Programmed Desorption (TPD) from perovskite oxides has shown that two types of oxygen can become desorbed (Y. Teraoka, H.-M. Zhang and N. Yamazoe, Chem.Lett. 1367 (1955)). Here oxygen desorbed at lower temperatures, termed α oxygen, corresponds to adsorbed surface
 15 oxygen, and that desorbed at higher temperatures, designated β oxygen, is desorbed from lattice sites within the perovskite. TPD studies on oxygen desorption from perovskite oxides have been studied as a function of the nature and concentration of dopant atoms introduced into both the A- and B- sites. A brief discussion of some of these results and their relevance to selection of perovskite sites for oxygen evolution at intermediate temperatures is presented
 20 below.

TPD studies of oxygen evolution from perovskite oxides has shown the amount of α-oxygen desorbed from Ln_{1-x}A_xMO₃ (Ln is a lanthanide, A is an alkaline earth metal, and M is Co, Fe Ni Cr) was a function of x and hence the vacancy concentration and was little affected by the nature of the B-site. These results suggested that α-oxygen occupied normally empty
 25 oxygen vacancy sites. The onset temperature where α-oxygen evolved was found to increase upon going from Ba to Sr to Ca in the A lattice site. Calculation of the average metal oxygen bond energy for the series La_{1-x}A_xCoO₃ (A is Ba, Sr and Ca) using the equation:

$$ABE = \frac{1}{12m} (\Delta H_{A_mO_n} - m\Delta H_A - \frac{1}{n} D_{(O_2)}) + \frac{1}{6m} (\Delta H_{B_mO_n} - m\Delta H_B)$$

where $\Delta H_{A_mO_n}$ and $\Delta H_{B_mO_n}$ are the heats of formation of the A_mO_n and B_mO_n oxides, respectively, ΔH_A and ΔH_B the heats of sublimation of the metals A and B, respectively, and

$D_{(O_2)}$ is the oxygen dissociation energy, shows that the average metal-oxygen bond energy decreases in the order $La_{1-x}Ca_xCoO_3$, $La_{1-x}Sr_xCoO_3$, $La_{1-x}Ba_xCoO_3$. Thus, the α -oxygen desorption temperature is dependent on the average metal-oxygen bond strength at the perovskite surface. β -oxygen desorption is due to removal of oxygen from normal lattice sites accompanied by reduction of the formal B site oxidation cation by one. More recent work has shown that partial substitution of the B-site cation in $La_{0.6}Sr_{0.04}Co_{0.8}M_{0.2}O_3$ with Cr, Mn, Fe, Ni, Ni and Cu affects both the onset temperature for and the amount of α -oxygen evolved. The amount of α -oxygen evolved decreased in the order $Cu > Fe > Ni > Mn > Cr$. (Y. Teraoka, T. Nobunaya, N. Yamazoe, Chem.Lett. 503 (1988).)

Good oxygen evolution catalyst sites can occur when using perovskites possessing the general composition $BaCo_{1-x}M_xO_3$, where M is Fe, Cu or Ag and x is a number from 0 to 1. For these compositions the vacancy concentration has been maximized by total replacement of the Ln^{3+} cation by the alkaline earth cation Ba^{2+} . Previous work (M. Crespin and K. W. Hall, J.Cat. 69, 359 (1981)) suggests that water decomposition at perovskite surfaces proceeds via reaction with oxygen vacancies. Additionally, selection of Ba over Sr or Ca leads to lower average metal-oxygen bond strengths and B site doping with Fe, Cu or Ag has been previously shown to enhance oxygen desorption.

As a consequence, perovskite electrocatalysts of formula $BaCo_{1-x}M_xO_3$, where M is Fe, Cu or Ag ($0.05 \leq x \leq 0.2$) are of significant interest for catalytic reactors of this invention. The predominance of Co in the B lattice site is compatible with both the oxygen dissociative adsorption and oxygen evolution step. Introduction of Fe, Cu and Ag into this lattice site will contribute to low overpotentials associated with the oxygen evolution reaction.

Metal oxide supported Ni can be employed on a membrane of this invention as a catalyst for CO_2/CH_4 oxidative reforming to synthesis gas. The Ni:support ratio in these catalysts can vary from about 5:100 (5%) to about 100% Ni. Preferred Ni:support ratios are from about 1:10 (10% Ni) to 4:10 (40% Ni). Supports employed included inert supports (such as $\gamma-Al_2O_3$) and ionic and electronic conductors. Supports having Cr and Mn ions are expected to promote CO_2 absorption facilitating the reforming reaction. A preferred catalyst is Ni supported LSM. In addition, supports based on substitution of Cr and Mn into the metal oxide structure $La_{0.4}Sr_{1.6}GaFeO_{5.2}$ are useful as catalyst supports in this system.

Catalysts for hydrocarbon coupling include, but are not limited to, perovskite electrocatalysts. These catalysts generally have a transition metal on the B site of the ABO_3

perovskite structures. The A site is occupied by two different f/l-block elements or IA elements. Examples are $\text{Sm}_{0.5}\text{Ce}_{0.5}\text{CuO}_3$, $\text{Tb}_{0.8}\text{Sm}_{0.2}\text{CuO}_3$, $\text{Gd}_{0.9}\text{Th}_{0.1}\text{CuO}_3$, $\text{Gd}_{0.9}\text{Na}_{0.1}\text{MnO}_3$, and $\text{Th}_{0.8}\text{Yb}_{0.2}\text{NiO}_3$ (Kuchynka, D.J. et al. (1991) J. Electrochem. Soc. **138**:1284).

Membranes useful in the CMRs of this invention can be dense, gas-impermeable sintered materials in any desired shape, including membrane disks, flat plates, open tubes, closed-one-end tubes, etc., which can be adapted to form a gas-tight seal between the two reactor zones or chambers of CMRs. Membranes can be composed substantially of the mixed phase ceramic material described herein or can be composed of porous substrate with a gas impermeable thin film of the mixed phase ceramic material described herein.

Membranes can be formed by isostatic pressing of mixed metal oxide materials of this invention into dense substantially gas-impermeable membranes. Alternatively, substantially gas-impermeable membranes can be formed by forming dense thin films of ionically and electronically conducting mixed metal oxide on porous substrate materials. Again these two component membranes (porous substrate and dense thin film) can have any desired shape including disks, tubes or closed-one-ended tubes. Porous substrates (which allow passage of gas through the substrate) can include various metal oxide materials including metal-oxide stabilized zirconia, titania, alumina, magnesia, or silica, mixed metal oxide materials exhibiting ion and/or electronic conduction or metal alloys, particularly those that minimally react with oxygen. The substrate material should be inert to oxygen or facilitate the desired transport of oxygen. More preferred substrates are those that have a thermal expansion coefficient (over the operational temperatures of the reactor) that is matched to that of the mixed metal oxide ion/electron conducting material.

Thin films (about 1-300 μm thick) of the mixed metal oxides of this invention are formed on the porous substrate by a variety of techniques, including tape casting, dip coating or spin coating. A presently preferred two component membrane is prepared by forming dense thin films of the mixed metal oxides of this invention on a porous substrate formed from the same mixed metal oxide material.

In operation, the ceramic membranes are subjected to several stresses. Reactor design can minimize these stresses. In the use of tubular ceramic membranes, for example, which are supported on alumina tubes, gas tight seals must be formed which accommodate the thermal expansion mismatch of the dissimilar reactor components. Chemical expansion also creates stresses which must be minimized. Again, using tubular ceramic membranes as an

example, gas flows for the conversion of methane to synthesis gas are designed to flow air through the inner length of the tube, with methane flowing over the outside surface of the tube. Reversing the gas flows can cause the membrane tubes to burst. This effect is related to the chemical expansion of the materials under oxidizing and reducing atmospheres.

5 Ceramic metal oxides heated in air are generally chemically reduced. The loss of oxygen from the lattice causes an expansion in the unit cell. The loss of oxygen, and hence the chemical expansion, is modified by heating under either more oxidizing or reducing gases. When opposite sides of a membrane are heated under different atmospheres (different gases which may be at different pressures), a gradient of oxygen occupancy can exist through
10 the membrane thickness. Hence, the stresses due to chemical expansion vary through the thickness of the membrane.

Stresses on tubular membranes are particularly significant. As a tubular shaped piece expands radially, the volume expansion on the outer region is greater than that of the inner region. This follows the lattice expansion caused by gas flows set up with oxidizing air
15 flowing through the center of the tube, and methane, or reducing gases, flowing over the outer surface, as in the reactor conditions described above. If the gaseous atmospheres were switched, the tubes would regularly burst from the excessive tensile stresses caused by the large volume increase on the inner portion of the tube.

Two inherent difficulties associated with applications of ceramic materials in CMRs
20 are the chemical inhomogeneity of the mixed conducting metal oxides exposed to oxidizing and reducing gases, and the brittle nature common to ceramics, which generally exhibit low strength in tension. This invention is based at least in part on the discovery that the addition of a second phase can increase the mechanical strength of membranes made from brownmillerite-derived MIECs. The increased strength reduces breakage and cracking from
25 handling and cutting associated with preparation of membranes for reactor setup. It also reduces breakage associated with thermal and chemical shock to which they are exposed under typical CMR operating conditions.

There are several examples of improved properties on introduction of second phases in metal alloys or metal oxides. Second phases can improve corrosion resistance, as observed
30 in magnesium metal alloys (U.S. Patent 5,139,077), act as a sintering aid by lowering sintering temperature through reactive sintering (U.S. Patent 4,848,984) or by increasing densification, or increase strength, as MgO in β -alumina (U.S. Patent 3,535,163).

Substantially single-phase material with analytically observable levels of second phases are prepared in a manner similar to the preparation of single-phase material, except that additional amounts of starting materials are needed to compensate for losses of volatile impurities are not added. Alternatively, an off-stoichiometric amount of these starting materials than that prescribed by the desired stoichiometry of the MIEC phase can be added to the other components. Somewhat more or less off-stoichiometric mixing causes more of the second phases to form. Materials having up to about 10% by weight of second phases have been prepared by this method. Second phases (or higher levels of second phases) have also been observed when the combined powders are inefficiently mixed prior to calcination.

A variety of methods are known in the art for the preparation of mixed oxide crystalline phases which can be used to prepare materials of this invention including, for example, sol-gel techniques and the glycine-nitrate combustion methods (See: M.N. Rahaman (1995) Ceramic Processing and Sintering, Marcel-Dekker, N.Y.; and L.A. Chick et al. (1990) Mater. Lett. 10:6).

The second phases observed most frequently are metal oxides which can be characterized in two different structure types: AB_2O_4 and A_2BO_4 . In these structures, Sr and La are mixed in the A-site, and the B-site is occupied by Fe and either Al or Ga. The precise ratio of the cations on each site is not analytically known. Identifying peaks for the Sr (Al, Fe) $_2O_4$ phase are three small peaks between 28 and $30^\circ 2\theta$, while the K_2NiF_4 phase (Sr, La) $_2$ (Al, Fe) O_4 shows a characteristic peak found just left of the largest peak from the desired single-phase metal oxide phase (about $31-32^\circ 2\theta$)

Two common types of second phases used in these membranes are not ionic or electronic conductors (AB_2O_4 and A_2BO_4). These phases are of the $BaAl_2O_4$ structure type, and the K_2NiF_4 structure type. The latter is the $n = 1$ member of the Ruddlesden-Popper type structures $AO \cdot (ABO_3)_n$, where perovskitic layers alternate with rock-salt type layers. These, and other intergrowth type structures are at best poor ionic conductors, as ionic conductivity is often restricted to two dimensions. As supporting second phases, though, they improve the mechanical strength of the brownmillerite-derived materials, and are not detrimental to their electrical properties.

EXAMPLES

Example 1: General Preparation of Membranes from Single-Phase and Mixed-Phase Mixed Metal Oxides

Starting materials for preparation of mixed metal oxides are obtained from commercial sources and typically are employed without further purification. For specific examples below, La_2O_3 , SrCO_3 , Ga_2O_3 , and Al_2O_3 are obtained from Alfa/Aesar at purities indicated below. Fe_2O_3 was obtained from Aldrich. A Loss on Ignition test (LOI) is performed on the above reagents to determine the amount of volatile compounds, (i.e., water, or CO_2) which are absorbed on the powders. For the SrCO_3 used LOIs range from 1.7 to 2.0% by weight. La_2O_3 is found to have LOIs ranging from 0.9 to 9.8% by weight. The other materials are found to have negligible LOIs. The LOI of a material received from a given supplier will generally vary with batch or lot and must be redetermined when a new batch or lot is employed. The LOI of material received in an individual shipment typically remained constant throughout the shelf life (several months) of that container in the laboratory. Exposure of starting materials to humid conditions may affect LOI.

The mixed metal oxide ceramic materials of this invention are, in general, prepared from powders using standard solid state synthesis techniques. All compounds are prepared from mixtures of the appropriate metal oxide(s) and metal carbonate(s) in amounts as indicated below. Powders are placed in a small polyethylene container with an equal amount, by volume, of isopropyl alcohol. Several cylindrical yttria-stabilized zirconia (YSZ) grinding media are also added to the container. The resulting slurry was mixed thoroughly on a ball mill for several hours. The alcohol is then allowed to evaporate yielding a homogeneous mixture of the starting materials. This homogeneous mixture is calcined to obtain the desired predominant MIEC phase. Powders are placed in alumina crucibles and fired at temperatures of 1100°C to 1450°C for 12 h in atmosphere. Upon cooling, the powders are sieved to 45 mesh size. Calcining is repeated if necessary (typically twice) until a consistent X-ray diffraction pattern indicates that reaction has gone to completion. XRD is performed using a Philips PW1830 X-ray generator with model 1050 goniometer for powder samples with a PW3710 control unit.

Before pressing and sintering, the particle size of the powders is reduced by attrition. A Union Process Model 01 attritor with a YSZ tank and YSZ agitator arms is used for this process. In a typical attrition, about 1.5 lbs of 5 mm, spherical YSZ grinding media are

placed in the tank. Isopropyl alcohol (about 120 mL) is then added to the tank followed by about 100 g of the powder sieved to -45 mesh. The powder's particle size is reduced by attrition for 1 h, after which the alcohol is allowed to evaporate. XRD on the powder indicates that the attrition procedure does not cause decomposition. No decomposition is observed for any materials. The XRD patterns show considerable peak broadening, indicative of small particles. The particle size at this stage is believed to be submicron to several micron (e.g., 0.7 - 2 micron).

Membrane materials can be shaped into disks, plates, tubes, closed-one-end tubes or other useful shapes by isostatic pressing using appropriately shaped molds. For example, a commercial isostatic press (Fluotion CP2-10-60) can be employed to form closed-one-end tube membranes. This press is capable of operation to 54,000 psi to form tubes of ~ 4 cm outer diameter and 10 cm in length. Powder is prepared and reduced in particle size as discussed above. A PVB (polyvinyl butyral) binder is added to the powder. A rubber mold is fabricated in the desired outer shape of the tube. A small amount of powder sufficient to form the top end of the closed-one-end tube is introduced into the mold. A mandrel having the shape of the inner surface of the tube is then inserted into the mold. A plug funnel is inserted into the top of the mold to allow powder to be added evenly around the mandrel. In particular, the funnel employed is designed so that it fits over the end of the mandrel and centers the mandrel in the mold. Powder is then poured into the mold via the funnel with vibration to ensure even packing. The mold is inserted into the press. Pressure of 15,000 psi to about 30,000 psi is applied to the mold for about 2 min. After pressurization, the mold is removed and the green tube is removed from the mold. Very high green densities up to 80%, as measured by the Archimedes method, can be obtained.

Green closed-one-end tubes are sintered by placing the tubes horizontally in a crucible with zirconia powder or setter of similar composition as the membrane. XRD of the tube surface after sintering indicated that no reaction had occurred between the setter and the tube. Straight closed-end tubes of sintered density typically between about 90% to 95% can be prepared using this method. Tubes with wall thicknesses ranging from about 0.5 mm to about 1.5 mm can be made by this method.

Membrane disks were formed by mixing the powder with a binder, e.g. a standard ceramic binder, such as Ceracer C640 (Shamrock), which is a polyethylene wax, with a mortar and pestle until a homogeneous mixture was obtained. Another suitable ceramic

binder is methyl-cellulose. The binder/powder mixture (about 1 g) was placed in a 12.5 mm diameter die. The mixture was then pressed into disks at 15,000 psi for several minutes. These "green" disks were then placed into an Al_2O_3 crucible for sintering. Disks were packed with powder of the same material to ensure that the disks did not react with the crucible or sinter together. Disks were sintered in the crucible in atmosphere for 4 h at the appropriate sintering temperature for a given material from about 1300°C to about 1450°C to obtain sintered disks preferably of $\geq 90\%$ theoretical density. Sintering temperature for a given material was determined empirically as is known in the art. Typical ramp rates during sintering were 3°C/min for both heating and cooling cycles.

Example 2: Preparation of a Single-Phase MIEC

$\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ was prepared by combining the following:

13.81 g of La_2O_3 (99.9% purity by weight on a rare earth metals basis)

65.02 g of SrCO_3 (99% purity by weight, with $<1\%$ Ba)

28.44 g of Fe_2O_3 (99+% purity by weight)

14.31 g of Ga_2O_3 (99.99% purity by weight on a metals basis)

in propanol and followed by ball milling for 18-24 hours, after which the milled powder was dried and calcined in an alumina crucible (in air) for 6-12 h at 1175°C - 1250°C. In this procedure, additional amounts of SrCO_3 (1.17 g) and La_2O_3 (1.35g) over the calculated amounts required to achieve the desired formula stoichiometry were added to the initial mixture to compensate for the volatile mass that would be lost before and during the solid state reactions, such that the final metal composition after reaction is the same as the nominal composition listed in the above formula. LOI for SrCO_3 and La_2O_3 starting materials were 1.8% and 9.8%, respectively. The resulting product was subjected to grinding and sieving before calcining a second time at 1175°C - 1250°C for 6-12 hours to complete reaction giving a homogeneous single phase powder.

To prepare dense membranes, the resulting powders were mixed with polyvinyl butyral binder 2-3wt%, but not more than 5wt%, pressed closed and sintered in air at 1150°C - 1450°C for 4-12 hours into dense disks and dense close-one-end tubes. Materials containing Ga are preferably sintered at lower temperatures in this range. X-ray diffraction of sintered membranes of $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ prepared in this manner, with addition of increased amounts of SrCO_3 and La_2O_3 to compensate for losses of volatile impurities, show

the material to be single-phase, with less than about 1wt% of second phase as shown in the XRD of Figure 1.

Example 3

$\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ was prepared as in Example 2 above combining the following starting materials of the same purity and source:

1.246 parts by wt. of La_2O_3 (12.46g)

6.385 parts by wt. of SrCO_3 (63.3g)

2.844 parts by wt. of Fe_2O_3 (28.44g)

1.431 parts by wt. of Ga_2O_3 (14.31g)

In this case no adjustments were made for the LOI correction. Membranes were prepared as in Example 2 above. An X-ray diffraction pattern of this membrane material is provided in Figure 2. Based on the LOI determination, the composition made was about 2.5% off of stoichiometric. Peaks in the regions about $28-31^\circ 2\theta$ and peaks at about 34 and 43 indicate the presence of second phases in addition to the predominant component $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$. Based on the XRD the second phase represents about 2-4wt% of the membrane.

Example 4

$\text{La}_{0.3}\text{Sr}_{1.7}\text{Al}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ was prepared as in B above combining the following starting materials of the same purity and source:

1.330 parts by wt. of La_2O_3 (13.30g)

6.831 parts by wt. of SrCO_3 (68.31g)

3.043 parts by wt. of Fe_2O_3 (30.43g)

0.833 parts by wt. of Al_2O_3 (99.99% purity by weight on a metals basis) (8.33g)

Membranes were prepared as in B above with no adjustment for LOI. LOI determination indicates that this composition is about 2wt% off-stoichiometric. An X-ray diffraction pattern of this membrane material is provided in Figure 3. The diffraction pattern with peaks at 28-31, 35 and 43-44 indicates the presence of a about 2wt% of second phases.

Example 5

$\text{La}_{0.5}\text{Sr}_{1.5}\text{Al}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ was prepared as in Example 3 above combining the following starting materials of the same purity and source:

21.48 g of La_2O_3

58.39 g of SrCO_3

29.47 g of Fe_2O_3

8.07 g of $\alpha\text{-Al}_2\text{O}_3$ (99.99% purity by weight on a metals basis)

Membranes were prepared as in Example 3 above. An X-ray diffraction pattern of this membrane materials is provided in Figure 4 with peaks at indicating the presence of about 7wt% - 8wt% of second phases. LOI determinations indicated that this composition should be about 9wt% off stoichiometric.

Example 6

A mixed phase material was prepared as in Example 3 above combining the following starting materials of the same purity and source:

17.87 g of La_2O_3

91.78 g of SrCO_3

29.20 g of Fe_2O_3

18.64 g of $\alpha\text{-Al}_2\text{O}_3$ (99.99% purity by weight on a metals basis)

This combination was intended to produce an MIEC of formula stoichiometry $\text{La}_{0.3}\text{Sr}_{1.7}\text{Al}_{1.0}\text{Fe}_{1.0}\text{O}_{5+z}$. However, the predominant phase formed is believed to have the formula $\text{La}_{0.3}\text{Sr}_{1.7}\text{Al}_{0.8-0.9}\text{Fe}_{1.2-1.1}\text{O}_{5+z}$. Excess aluminum above that incorporated into the MIEC phase was incorporated into the second phase or phases. Membranes were prepared as in Example 3 above. An X-ray diffraction pattern of this membrane material is provided in Figure 5 indicating the presence of about 5 - 6wt% of second phases.

Example 7: Preparation of Thin Film Membranes

Membranes for catalytic membrane reactors can be prepared by coating a substrate with a thin film (about 10-about 300 μm thick) of a mixed metal oxide material of this invention. In particular a porous substrate material can be coated with a dense thin film of these materials to provide a substantially gas impermeable membrane. In general, thin films are applied to selected substrates by methods known in the art, including tape casting, dip coating or spin coating. Presently preferred thin film-coated membranes are prepared using a porous membrane as a substrate where the porous membrane is made of a mixed metal oxide of the same or similar composition to the ion and electron conduction mixed metal oxide that will comprise the thin film. Use of a substrate that has the same or a similar (preferably within about 20% of) thermal expansion coefficient as the thin film material will minimize or avoid cracking of the film and/or membrane on heating. Furthermore, use of a chemically similar material for both the substrate and thin film will minimize undesired reactivity of the

two materials with each other and undesired reactivity of the substrate with gases in the reactor. Porous membranes of the mixed metal oxides of this invention can be prepared in a variety of ways, for example, by combining the metal oxide with an organic filler (up to about 20% by weight), such as cellulose or starch particles of a selected size range (e.g. about 20µm particles), shaping or pressing the desired membrane and sintering. The organic filler is destroyed and removed on sintering leaving desired pores of a selected size in the membrane. Thin films are preferably uniformly thick and crack-free on firing. Uniform deposition of films can for example be obtained by use of colloidal suspensions of the metal oxide in a selected solvent. The suspension is applied to the porous substrate by conventional coating or casting methods to give a uniform deposition which on firing gives a film of uniform thickness. An alternative method for applying thin films is the use of co-polymeric precursors which comprise metal oxide incorporated into the polymer. Flat membranes or tubular membranes can be prepared having dense thin films of the metal oxide mixed ion and electron conductors of this invention.

Example 8

The derived expression for ionic conductivity may be given by:

$$\sigma T = A \exp (-\Delta H_m / K T)$$

Here K is the Boltzmann constant and $-\Delta H_m$ is the enthalpy of activation and is equivalent to E_a . Equation (1) shows that the overall ionic conductivity, σ , is a function of both an exponential term and pre-exponential term. The pre-exponential term A, given in the following equation is related to the number of charge carriers present in the solid-state lattice where an intrinsically high population of oxygen vacancies are present, thereby contributing to high ionic conductivity.


$$A = (Z \lambda^2 e^2 / 6 v_0 \exp(\Delta S_m / K))$$

Here ΔS_m is the activation entropy, C is the fraction of available sites occupied by mobile ions, λ is the jump distance, Z is the number of jump directions, v_0 is the molar volume, and e is the electronic charge.

The performance of a ceramic membrane placed in a CMR is based on its ability to promote the desired reaction, i.e., production of syngas, conversion of hydrocarbons by reaction with oxygen. These reactions proceed based on the materials' ability to conduct both oxygen and electrons. Under appropriate reactor conditions, production or conversion rates can be correlated directly with the materials' ionic and electronic conductivity. A direct

comparison of the single phase membranes and mixed phase membranes in CMRs has not been carried out due to the fragility of the pure single phase membranes.

In this case, a separate method of measuring conductivity based on a hydrogen-oxygen fuel cell can be carried out. Conductivity tests of this type can be performed on ceramic disks, rather than the tubes used in CMRs. A sample pellet is coated on opposite sides with appropriate anode and cathode catalysts, such as nickel and silver, respectively. A current carrier wire is attached to each electrode. A gas tight seal is made on each side of the material with a glass spring. Oxygen and hydrogen gas flow through opposite sides of the cell. A computer controlled program is run to heat the cell over a predetermined temperature range, with data taken at appropriate temperature intervals. A comparison of the theoretical open circuit potential with the measured cell potential for the reaction:



is made at each temperature. Electronic conductivity in the material results in a drop in the open circuit potential. Thus, the electronic contribution to the total conductivity can be determined at each temperature. Ionic conductivity is determined by applying a load to the cell, and measuring the voltage drop across the load. At a given temperature, a series of loads can be applied, from which a voltage versus current curve can be generated, the slope of which corresponds to the resistance of the material. Results of measurement of ionic conductivity of single phase MIEC and mixed phase membranes of this invention typically do not differ significantly. In some cases, ionic conductivity of the mixed phase material is lower than that of the corresponding single phase MIEC.

Example 9: Mechanical Strength of Membranes

Mechanical strength assessment can be carried out on these materials according to American Society for Testing and Materials (ASTM) Standard Test Method C 1161 for Flexural Strength of Advanced Ceramics at Ambient Temperature. The 4-point flexural Strength tests described in this method provide direct comparison of Strength of single phase and mixed phase membrane materials.

Example 10: SEM and TEM Measurements

Standard art-known scanning electron microscopy and transmission electron microscopy can be employed to detect and quantify the amounts of second phase(s) present in membrane materials.

Figures 6A and 6B illustrate SEM images of mixed phase materials containing $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+z}$ prepared by mixing starting materials without compensating for LOI. The materials employed in these SEM images are not the same as those of Example 3 and Figure 2. The level of second phases in these materials are higher than those of Example 3, and are estimated based on the SEM images as being present at 5 - 10wt%. La-deficient second phases are indicated in Figures 6A and 6B as dark grains on the images. Figure 6A and 6B are images of different samples of the same material, indicating distribution of the second phase throughout the material.

Microprobe analysis by energy dispersive analysis by X-ray (EDX) shows these second phase regions to be deficient in La, relative to the bulk phase. This is consistent with formation of a SrAl_2O_4 type phase as seen in the XRD patterns. The second phase regions are dispersed throughout the grains, and range in size from approximately 1-8 micrometers in diameter. The accompanying SEM maps are of $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.6}\text{Fe}_{1.4}\text{O}_{5+x}$ (Fig. 7A) and $\text{La}_{0.3}\text{Sr}_{1.7}\text{Ga}_{0.2}\text{Al}_{0.4}\text{Fe}_{1.4}\text{O}_{5+x}$ (Fig. 7B) and show similar results. In these examples, the second phases are present in amounts of 5-10%.

Those of ordinary skill in the art will appreciate that methods, materials, reagents, solvents, membrane structures and reactors other than those specifically exemplified herein can be employed or adapted without undue experimentation to the practice of this invention. All such variants in methods, materials, reagents, solvents, structures and reactors that are known in the art and that can be so adapted or employed are encompassed by this invention.

All references cited herein are incorporated in their entirety by reference herein to the extent not inconsistent herewith.

We claim:

1. A gas-impermeable mixed phase ceramic catalytic reactor membrane which comprises about 80% or more by weight of a mixed ionic and electronic conducting phase and from about 0.1 to about 20% by weight of one or more structurally distinct second phases which impart mechanical strength to the membrane.
2. The mixed phase ceramic membrane of claim 1 wherein the mixed ionic and electronic conducting phase represents about 90 wt% to about 99wt% and the second phases represent about 1wt% to about 10wt% of the membrane.
3. The mixed phase ceramic membrane of claim 1 wherein the mixed ionic and electronic conducting phase has the formula:



where A is an element from the f block lanthanide elements; A' is an element selected from the Group 2 elements, A'' is an element from the f block lanthanide or Group 2 elements; B is an element selected from Al, Ga, In or mixtures thereof; B' and B'' are different elements and are selected independently from the group of elements Mg, and the d-block transition elements, including Zn, Cd, or Hg; $0 < x < 2$, $0 < x' < 2$, $0 < y < 2$, $0 < y' < 2$ where $x + x' \leq 2$ and $y + y' \leq 2$, and z varies to maintain electroneutrality.

4. The mixed phase ceramic membrane of claim 3 wherein the second phases are selected from $(A, A')_2 (B, B')O_4$, $A'_2 (B, B')O_4$, $(A, A')(B, B')_2 O_4$, $A'(B, B')_2 O_4$, $A_2 (B, B')O_4$, $(A, A')_2 BO_4$, $(A, A')_2 B'O_4$, $(A, A')B_2 O_4$, $(A, A')B'_2 O_4$ and $A(B, B')_2 O_4$.
5. The mixed phase ceramic membrane of claim 3 wherein the second phases are selected from $A_2 BO_4$, $AB_2 O_4$, $A_2 B'O_4$, $AB'_2 O_4$, $A'_2 BO_4$, $A'B_2 O_4$, $A'_2 B'O_4$, and $A'B'_2 O_4$.
6. The mixed phase ceramic membrane of claim 3 wherein in the mixed ionic and electronic conducting phase $0.05 < x < 1$, $1 < x' < 1.95$, $0.25 < y < 1.2$, and $0.8 < y' < 1.75$.
7. The mixed phase ceramic membrane of claim 1 wherein the second phases represent about 1wt% to about 20wt% of the membrane.
8. The mixed phase ceramic membrane of claim 7 wherein the second phases represent about 1wt% to about 10wt% of the membrane.

9. The mixed phase ceramic membrane of claim 1 wherein in the mixed ionic and electronic conducting phase has the formula:



10. The mixed phase ceramic membrane of claim 7 wherein in the mixed ionic and electronic conducting phase B is Ga or Al.
11. The mixed phase ceramic membrane of claim 7 wherein the second phases are selected from $(\text{Sr}, \text{La})_2(\text{Al}, \text{Fe})\text{O}_4$ or $\text{Sr}(\text{Fe}, \text{Al})_2\text{O}_4$.
12. A ceramic membrane reactor having a gas-impermeable membrane of claim 1.
13. A ceramic membrane reactor for the production of synthesis gas having the gas-impermeable membrane of claim 1.
14. A gas-impermeable ceramic membrane of claim 1 consisting essentially of about 80% or more by weight of a mixed ionic and electronic conducting phase and from about 0.1 to about 20% by weight of one or more structurally distinct second phases which impart mechanical strength to the membrane.
15. The ceramic membrane of claim 14 consisting essentially of about 80% or more of a mixed ionic and electronic conducting phase and about 1wt% to about 20wt% of second phases.
16. The ceramic membrane of claim 14 consisting essentially of about 90wt% to about 99wt% of a mixed ionic and electronic conducting phase and about 1wt% to about 10wt% of second phases.
17. A method for oxidizing a reactant gas capable of reacting with oxygen which comprises the steps of:
- (a) providing a catalytic membrane reactor cell comprising an oxidation zone and a reduction zone separated by a gas-impermeable mixed phase ceramic membrane having a reduction surface and an oxidation surface;
 - (b) heating said reactor cell to a temperature of from about 300°C to about 1200°C;
 - (c) passing an oxygen-containing gas in contact with the reduction surface of said membrane of said heated reactor in said reduction zone; and
 - (d) passing said reactant gas in contact with the oxidation surface of said membrane of said heated reactor in said oxidation zone to effect oxidation of said reactant gas, wherein the gas-impermeable mixed phase ceramic

membrane comprises about 80% or more by weight of a mixed ionic and electronic conducting phase and from about 0.1 to about 20% by weight of one or more structurally distinct second phases which impart mechanical strength to the membrane.

18. The process of claim 17 wherein the mixed ionic and electronic conducting phase comprises about 90wt% to about 99wt% and the second phases represent about 1wt% to about 10wt% of the membrane of step (d).
19. The process of claim 17 wherein the heating temperature of step (b) ranges from about 600°C to 1100°C.

20. The process of claim 17 wherein in the ceramic membrane the mixed ionic and electronic conducting phase has the formula



where A is an element from the f block lanthanide elements; A' is an element selected from the Group 2 elements, A'' is an element from the f block lanthanide or Group 2 elements; B is an element selected from Al, Ga, In or mixtures thereof; B' and B'' are different elements and are selected independently from the group of elements Mg, and the d-block transition elements, including Zn, Cd, or Hg; $0 < x < 2$, $0 < x' < 2$, $0 < y < 2$, $0 < y' < 2$, z varies to maintain electroneutrality, $x + x' \leq 2$, $y + y' \leq 2$.

21. A method for production of synthesis gas by reaction of an oxygen-containing gas with a hydrocarbon which comprises the steps of:
- (a) providing a catalytic membrane reactor cell comprising an oxidation zone and a reduction zone separated by a gas-impermeable ceramic membrane having a reduction surface and an oxidation surface;
 - (b) heating said reactor cell to a temperature of from about 300°C to about 1200°C;
 - (c) passing an oxygen-containing gas in contact with the reduction surface of said membrane of said heated reactor in said reduction zone; and
 - (d) passing a hydrocarbon gas in contact with the reduction surface of said membrane to effect the production of synthesis gas wherein the gas-impermeable mixed phase ceramic membrane comprises about 80% or more by weight of a mixed ionic and electronic conducting phase and from about

0.1 to about 20% by weight of one or more structurally distinct second phases which impart mechanical strength to the membrane.

22. The process of claim 21 wherein the mixed ionic and electronic conducting phase comprises about 90wt% to about 99wt% and the second phases represent about 1wt% to about 10wt% of the membrane of step (d).

23. The method of claim 21 wherein the mixed ionic and electronic conducting phase has the formula:



where A is an element from the f block lanthanide elements; A' is an element selected from the Group 2 elements, A'' is an element from the f block lanthanide or Group 2 elements; B is an element selected from Al, Ga, In or mixtures thereof; B' and B'' are different elements and are selected independently from the group of elements Mg, and the d-block transition elements, including Zn, Cd, or Hg; $0 < x < 2$, $0 < x' < 2$, $0 < y < 2$, $0 < y' < 2$, z varies to maintain electroneutrality, $x + x' \leq 2$, $y + y' \leq 2$.

24. The method of claim 23 wherein the mixed ionic and electronic conducting phase has the formula:



25. A method for making a mixed phase ceramic material which comprises a mixed ionic and electronic conducting (MIEC) metal oxide and at least one second phase which comprises the steps of:

- (a) combining metal precursors of the metal of the MIEC metal oxide to obtain a combination of metal ions in which the relative amounts of metal ions are off-stoichiometric for at least one metal ion with respect to the formula of the MIEC metal oxide;
- (b) milling the combined metal precursors to obtain a homogeneous mixture;
- (c) calcining the homogeneous mixture to obtain the MIEC metal oxide in combination with a second phase containing at least one metal ion of the metal ions of the MIEC to form a homogeneous powder mix;
- (d) reducing the particle size of the powder mix, if necessary, to less than about 2 microns; and
- (e) repeating steps c and d until reaction is complete.

26. The method of claim 25, wherein the mixed ionic and electronic conducting material has the formula:



- 5 where A is an element from the f block lanthanide elements; A' is an element selected from the Group 2 elements, A'' is an element from the f block lanthanide or Group 2 elements; B is an element selected from Al, Ga, In or mixtures thereof; B' and B'' are different elements and are selected independently from the group of elements Mg, and the d-block transition elements, including Zn, Cd, or Hg; $0 < x < 2$, $0 < x' < 2$, $0 < y < 2$, $0 < y' < 2$ where $x + x' \leq 2$ and $y + y' \leq 2$, and z varies to maintain
10 electroneutrality.

1/7

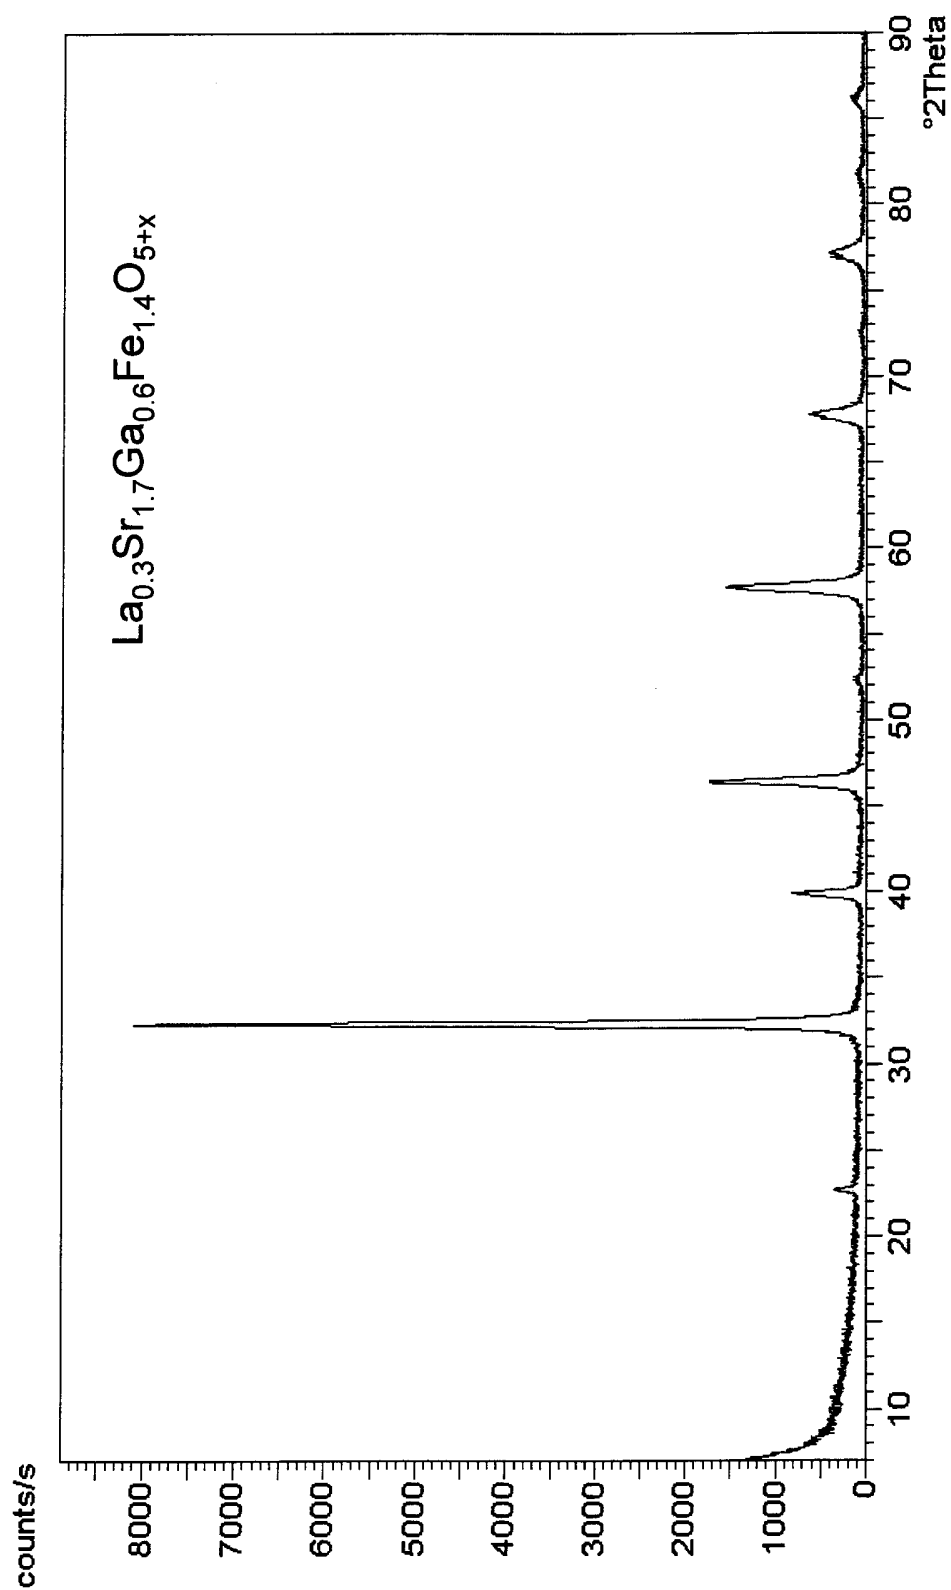


FIG. 1

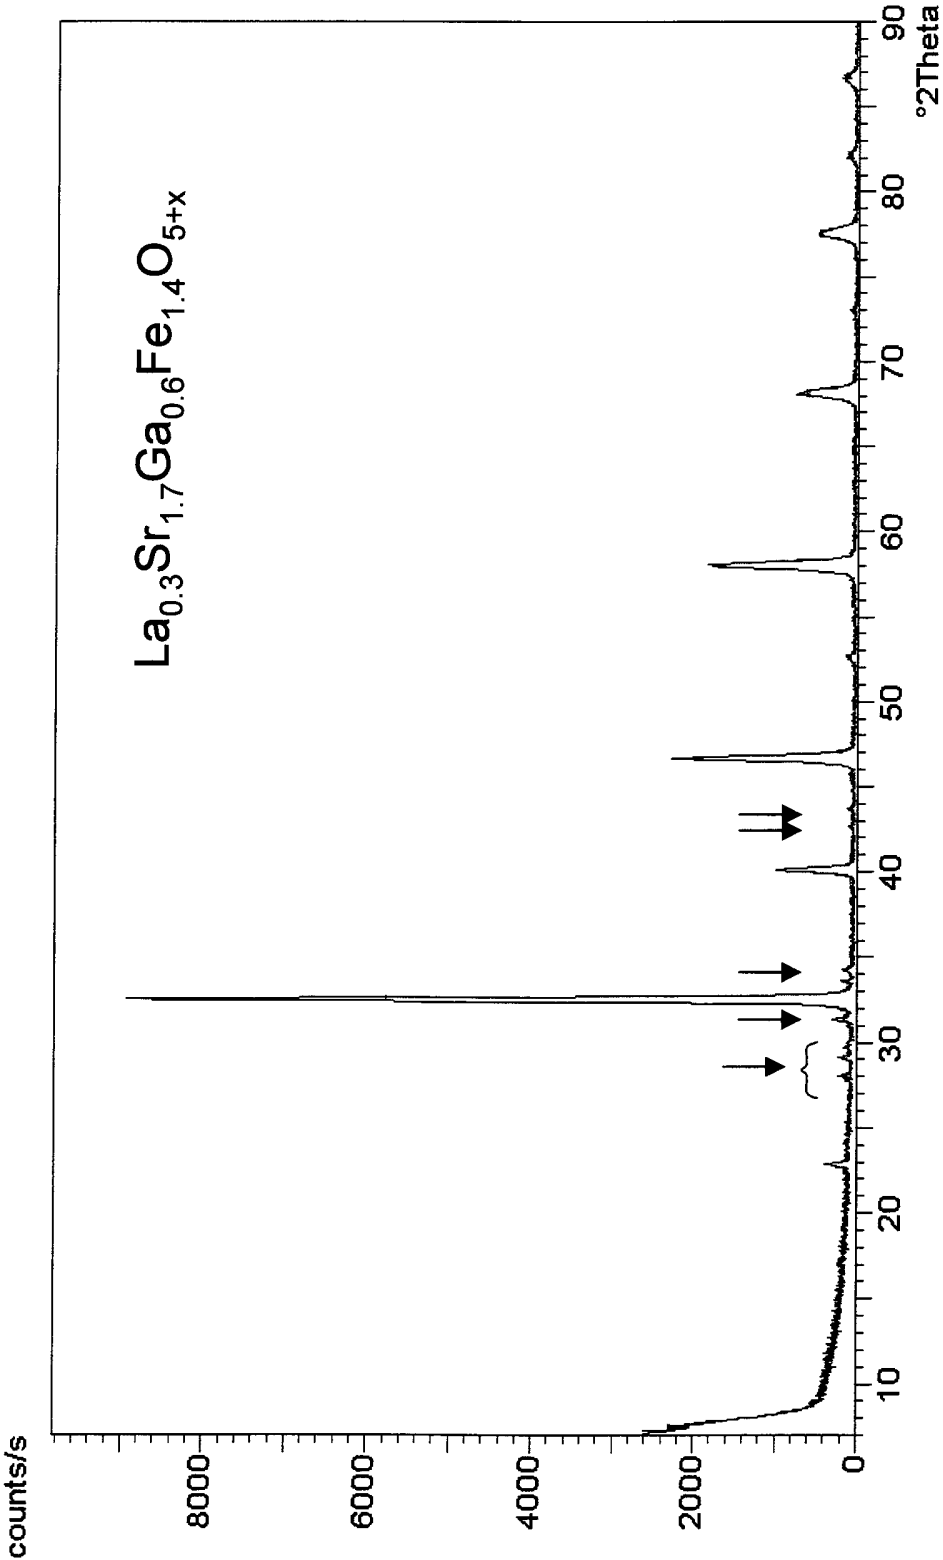


FIG. 2

3/7

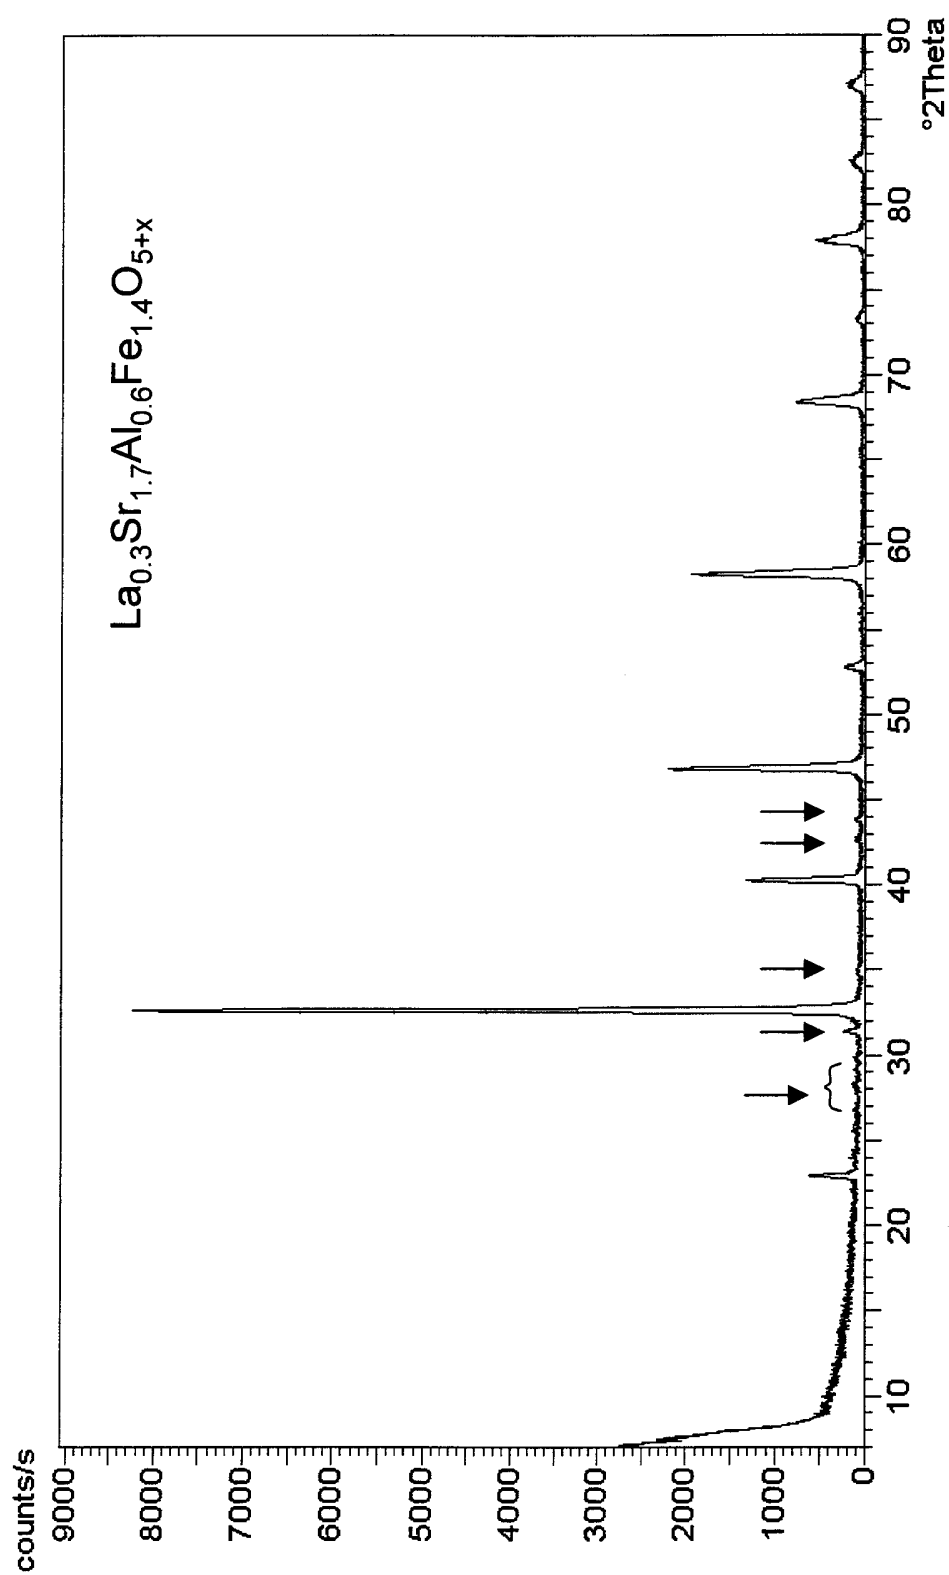


FIG. 3

4/7

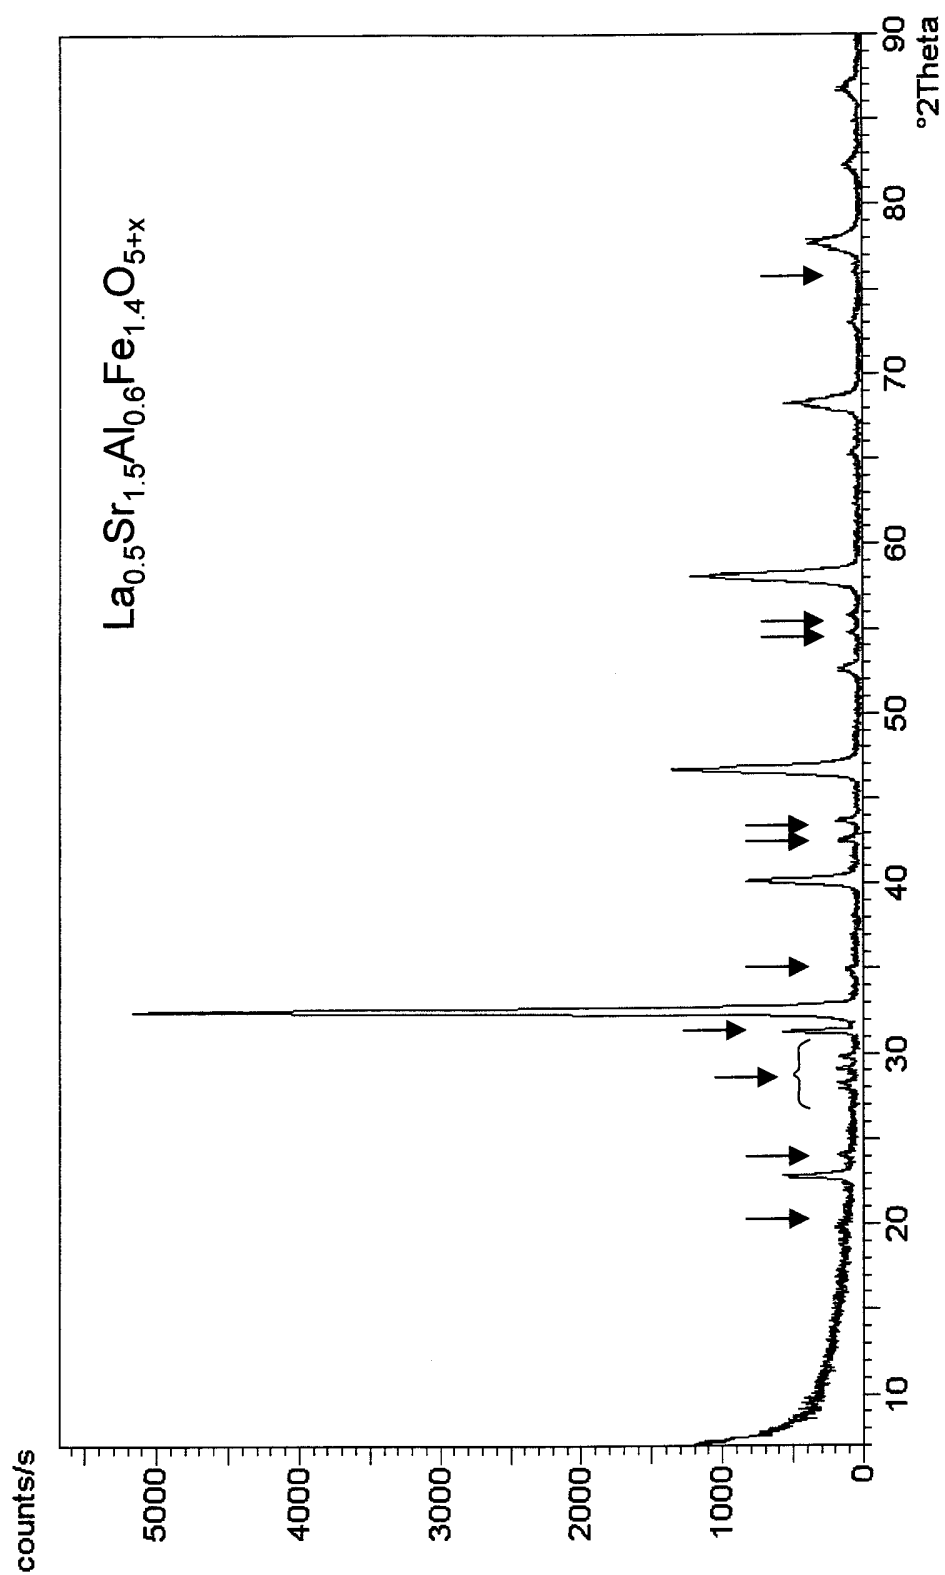


FIG. 4

5/7

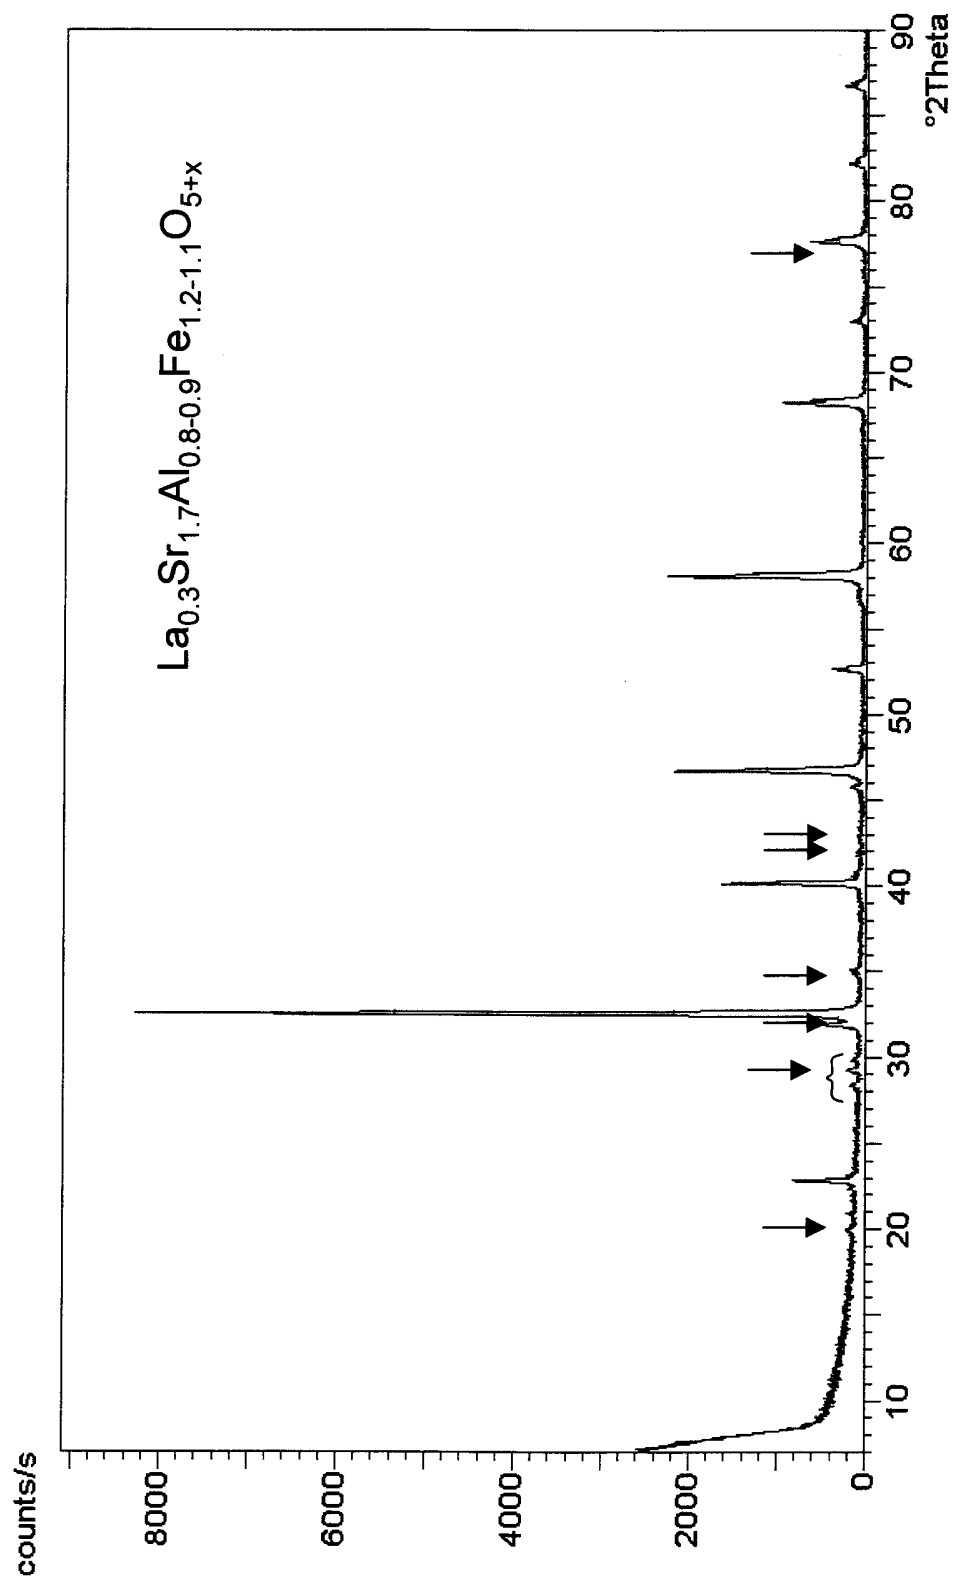


FIG. 5

6/7

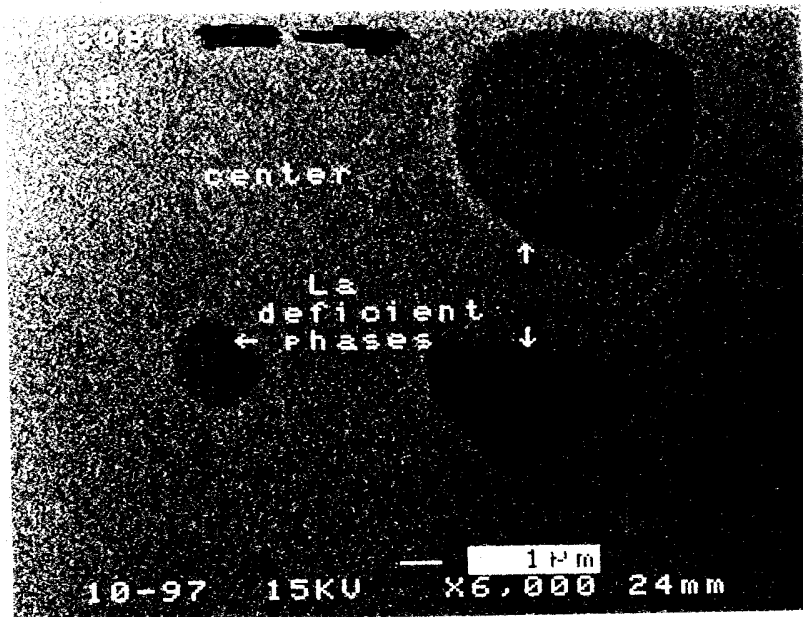


FIG. 6A

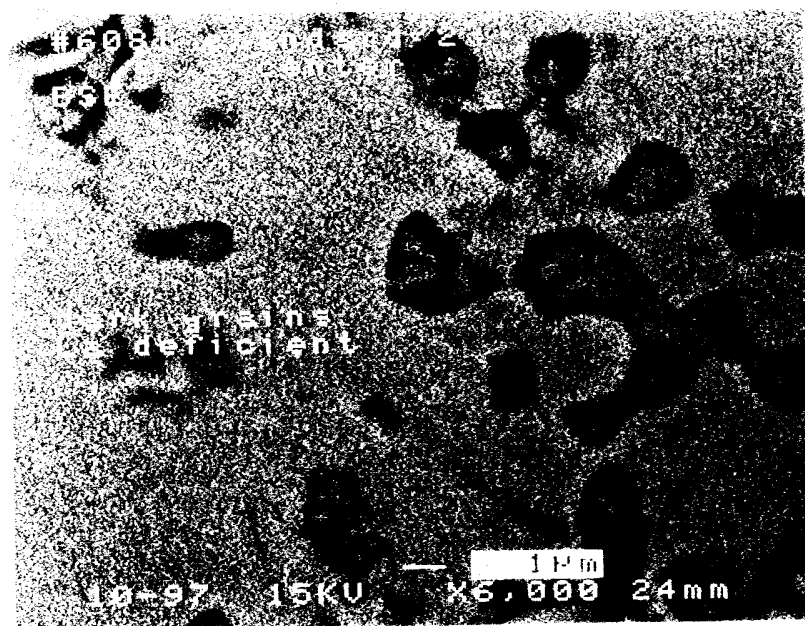


FIG. 6B

7/7

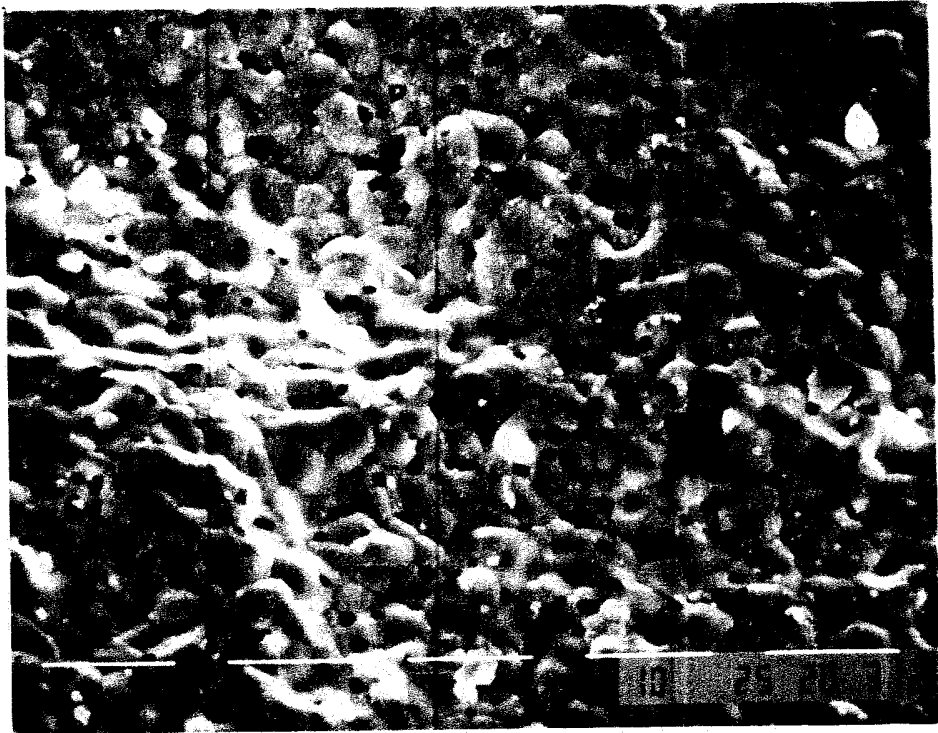


FIG. 7A

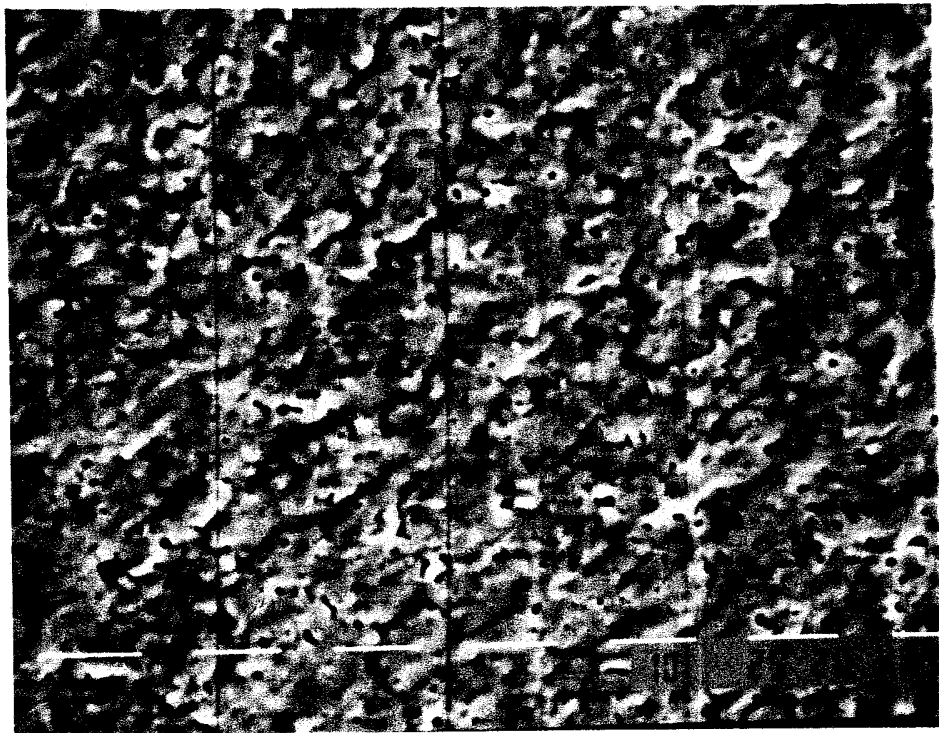


FIG. 7B

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

 International application No.
PCT/US00/13955

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : BO1J 20/28, 35/00; C07C 1/02

US CL : 422/239, 240; 502/4, 525; 585/443

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 422/239, 240; 502/4, 525; 585/443

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,624,542 A (SHEN et al) 29 April 1997, col 4, line 53 to col 5, line 51 and col 6, line 56 to col 7, line 62.	1, 6, 7, 10-13
X	US 5,911,860 A (CHEN et al) 15 June 1999, col. 10, claims 1 and 2, col 7, lines 50-54 and examples I, II and III, and col 9, lines 28-43.	1, 2, 5-8, 12-13
Y	US 5,714,091 A (MAZANEC et al) 03 February 1998, col 9, line 65 to col 12, col 14, claim 3 and col 16, claim 15.	3, 4, 9, 17-24
Y	EP 0 705 790 A1 (THE STANDARD OIL COMPANY) 10 April 1996, page 6, lines 18-40.	25-26
A	US 5,356, 728 A (BALACHANDRAN eta al) 18 October 1994, entire document.	all

☒ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

04 AUGUST 2000

Date of mailing of the international search report

25 AUG 2000

 Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

SUSAN K. OHORODNIK

Telephone No. (703) 306-0661

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/13955

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,802,958 A (MAZANEC et al) 07 February 1989, entire document.	all