


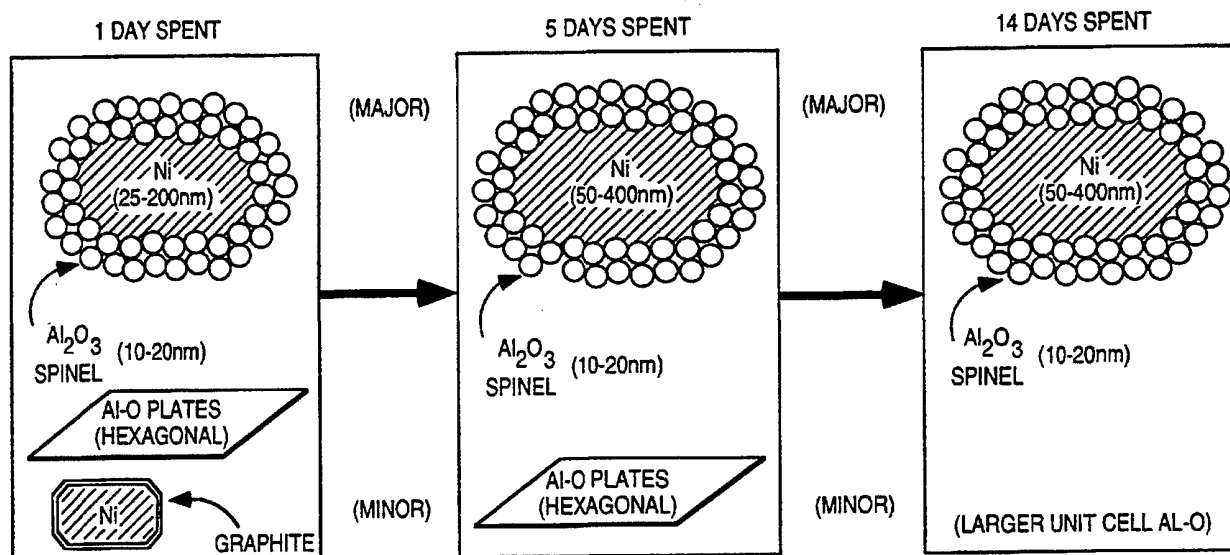

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C01B 3/40, B01J 23/00, 23/74, C01G 53/00		A1	(11) International Publication Number: WO 94/14700
			(43) International Publication Date: 7 July 1994 (07.07.94)
(21) International Application Number: PCT/US93/12286		(81) Designated States: AU, BB, BG, BR, CA, CZ, FI, HU, JP, KR, PL, RO, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 16 December 1993 (16.12.93)			
(30) Priority Data: 07/993,419 21 December 1992 (21.12.92) US 08/110,104 20 August 1993 (20.08.93) US		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: AMOCO CORPORATION [US/US]; Mail Code 1907, Patent and Licensing Department, P.O. Box 87703, Chicago, IL 60680-0703 (US).			
(72) Inventors: BHATTACHARYYA, Alakananda; 2230 Hiram Court, Weaton, IL 60187 (US). CHANG, Wen-Dong; 988 Creekside Circle, Naperville, IL 60563 (US). KLEEFISCH, Mark, S.; 5 South 771 Springdale Drive, Naperville, IL 60540 (US). UDOVICH, Carl, A.; 3526 Bank View Lane, Joilet, IL 60435 (US).			
(74) Agent: HENSLEY, Stephen, L.; Amoco Corporation, Patents & Licensing Department, Mail Code 1907, P.O. Box 87703, Chicago, IL 60680-0703 (US).			

(54) Title: **METHOD FOR PREPARING SYNTHESIS GAS USING NICKEL CATALYSTS**

(57) Abstract

A method and nickel-containing catalyst are disclosed for preparing synthesis gas by the reforming of a hydrocarbyl compound using an oxygen-containing compound.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD FOR PREPARING SYNTHESIS GAS USING NICKEL CATALYSTS

Field of the Invention

5 This invention relates to a method for preparing synthesis gas by reacting a hydrocarbyl feed material with a source of oxygen at an elevated temperature. More particularly, this invention relates to the preparation of synthesis gas using new nickel-containing catalytic materials that are unusually resistant to deactivation. Additionally, this invention relates to new
10 nickel-containing catalyst precursor and catalyst compositions that are useful for the production of synthesis gas and which catalysts are resistant to coke formation when used to catalyze the reaction of a hydrocarbyl compound with an oxygen-containing gas at elevated temperatures to form synthesis gas.

Background of the Invention

15 Synthesis gas, a mixture of carbon monoxide (CO) and molecular hydrogen (H₂), is a valuable industrial feedstock for the manufacture of a variety of useful chemicals. For example, synthesis gas can be used to prepare methanol or acetic acid. Synthesis gas can also be used to prepare
20 higher molecular weight alcohols or aldehydes as well as higher molecular weight hydrocarbons.

 Perhaps the most common commercial source of synthesis gas is the steam reforming of coal or a hydrocarbon, particularly natural gas. In the steam reforming process, a mixture of water and the hydrocarbon are
25 contacted at a high temperature, for example, in the range of about 850 to about 900°C, and typically in the presence of a catalyst, to form a mixture of hydrogen and carbon monoxide. Using methane as the hydrocarbon, the theoretical stoichiometry for the steam reforming reaction is as follows:




30 In prior steam reforming processes, because of the large amount of steam typically necessary to reduce coke formation, the ratio of H₂ to CO produced is typically greater than 3:1 and can be 5:1.


 The steam reforming reaction is a highly endothermic reaction, and, as discussed above, it produces a relatively high molar ratio of hydrogen to
35 carbon monoxide when conventional processes are used. In some processes using synthesis gas, the excess hydrogen is not necessary and must be separated from the CO. For example, the manufacture of methanol

or acetic acid from synthesis gas requires less than a 3:1 molar ratio of hydrogen to carbon monoxide.

There are other methods for preparing synthesis gas that are more attractive than the steam reforming reaction. Synthesis gas produced by the partial oxidation of methane, for example, is an exothermic reaction and produces synthesis gas having a lower ratio of hydrogen to carbon monoxide, according to the following equation:



Synthesis gas can also be produced by the reaction of a hydrocarbyl compound such as methane with carbon dioxide. This reaction proceeds according to the following equation:



This reaction, like the steam reforming reaction, is endothermic; however, it produces a low ratio of hydrogen to carbon monoxide (1:1) and is very useful where there is an abundant supply of carbon dioxide, for example, at a refinery or near naturally-occurring CO_2 reserves. Additionally, the reforming reaction using carbon dioxide can also be used in conjunction with the steam reforming reaction to adjust the ratio of hydrogen to carbon monoxide.

In all of the hereinabove described processes for preparing synthesis gas, it is advantageous to conduct the reaction of the hydrocarbyl compound with the source of oxygen in the presence of a catalyst. For example, catalysts for the steam reforming of methane and other hydrocarbons are commonly based on nickel as the active catalyst component. Vernon et al. in *Catalysis Letters*, Vol. 6, pages 181-186, 1990, discloses that methane can be converted to synthesis gas over catalysts such as palladium, platinum, or ruthenium on alumina, nickel on alumina, and certain transition metal oxides including $\text{Pr}_2\text{Ru}_2\text{O}_7$ and $\text{Eu}_2\text{Ir}_2\text{O}_7$. While Vernon et al. discloses that nickel on alumina catalysts are effective for the conversion of methane to synthesis gas using molecular oxygen, we have determined that such a catalyst, as well as commercial nickel-containing steam reforming and steam cracking catalysts, form coke and deactivate relatively rapidly. While the other catalysts described in Vernon et al., such as ruthenium on alumina, can be used to reform a hydrocarbyl compound such as methane in the presence of molecular oxygen, such transition metals are expensive and the transition metal catalyst based on ruthenium we evaluated exhibited lower conversion and lower selectivity to synthesis gas compared to the


catalysts of this invention. Ashcroft et al. in Nature, Volume 352, page 225, 1991, describes the reforming of methane with carbon dioxide to form synthesis gas using catalysts such as palladium, ruthenium and iridium on alumina, as well as nickel on alumina.

5 U.S. Patent 3,791,993 to Rostrup-Nielsen discloses the preparation of catalysts containing nickel for reforming gaseous or vaporizable liquid hydrocarbons using steam, carbon oxide, oxygen and/or air. The catalysts disclosed therein are prepared by coprecipitating a nickel salt, a magnesium salt and an aluminate to form a sludge, washing the sludge until it is
10 substantially free of sodium and potassium, drying, and then dehydrating at 300-750°C. The ultimate catalyst is formed after a calcination step at 850-1100°C. The examples in the 3,791,993 U.S. Patent show that compositions having a 1:1:2 or a 2:7:1 mole ratio of nickel, magnesium and aluminum, respectively, are suitable for converting naphtha to hydrogen-rich gaseous
15 products using steam reforming.

In view of the great commercial interest in preparing synthesis gas by reforming readily available hydrocarbon feedstocks such as natural gas, and because of the benefits of conducting these reforming reactions in the presence of a catalyst that remains active for an extended period of use,
20 there is a continuing need for new, less expensive, durable, coke resistant, more active and selective catalysts for the production of synthesis gas. The present invention provides such catalysts as well as a method for preparing synthesis gas using such catalysts.

The catalysts useful in the process of this invention can be prepared
25 from a nickel-containing catalyst precursor compound having a structure that is referred to as "hydrotalcite-like." Hydrotalcite-like compounds are anionic clays, both natural and synthetic, that have a layered or sheet-like structure. For example, hydrotalcite, a naturally occurring mineral, has the chemical composition $[\text{Mg}_6\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot 4\text{H}_2\text{O}$, and is composed of molecular
30 "sheets", each sheet comprising a mixture of magnesium and aluminum hydroxides. The sheets are separated by carbonate ions which balance the net positive charge of the sheets. In these "sheets," the magnesium and aluminum ions are 6-fold coordinate in hydroxide, and the resulting octahedra share edges to form infinite sheets. Water molecules, like the
35 carbonate ions, are randomly located in the space between these sheets. Although pure hydrotalcite contains only magnesium and aluminum cations, a variety of naturally occurring, as well as synthetic hydrotalcite-like

compositions are known. A general formula for these hydrotalcite-like compounds is:



wherein x generally is a number between 0.1 and 0.50, M^{2+} is a 2+ metal ion, for example, Mg^{2+} and M^{3+} is a 3+ metal ion, for example, Al^{3+} . The anion, A^{n-} , can be one of a number of anions such as carbonate. Hydrotalcite-like compounds containing borate as the anion have been disclosed by Bhattacharyya et al., in *Inorganic Chemistry*, Volume 31, page 3869, 1992. Drezdson, in *Inorganic Chemistry*, Volume 27, page 4628, 1988, discloses the synthesis of isopolymetalate-pillared hydrotalcites.

As described above, hydrotalcite-like compounds share the "sheet-like" structural characteristics, which is conveniently identified using x-ray powder diffraction (XRD) analyses. Hydrotalcite-like materials typically have a d(001) value of at least about 7.8Å. Based on the size of the anion used, the hydrotalcite-like molecules can have d(001) values up to 15Å. The d(001) value is indicative of the inter layer spacing present in the hydrotalcite-like materials.


Hydrotalcite-like compounds have been used as catalysts in a variety of applications, such as catalysts for aldol condensation, polymerization of alkene oxides, hydrogenation catalysts, dehydrogenation catalysts, etc., as described in F. Cavani et al., *Catalysis Today*, Volume 11, pages 173-301, 1991. Cavani et al. discloses that coprecipitated Ni, Al-based catalysts have been recognized as satisfying all the requirements for operation in steam reforming for methane production, and that coprecipitated catalysts calcined at 723°K (450°C) and reduced at 723°K were active in the 673-923°K (450°C-650°C) range for steam cracking of naphtha to produce methane. U.S. Patent 3,865,753 to Broecker et al. discloses the use of a catalyst prepared by calcining $[Ni_5MgAl_2(OH)_{16}]CO_3 \cdot 4H_2O$ at a temperature in the range of 350°C to 550°C, and which is subsequently reduced with hydrogen. Such a catalyst was used for the steam cracking of hydrocarbons having 2 to 30 carbon atoms at a temperature in the range of 300 to 450°C to form methane. Ross et al., *J. of Catalysis*, Volume 52, pages 280-290, 1978, have examined the reaction of methane with water over a catalyst derived from $Ni_6Al_2(OH)_{16}CO_3 \cdot 4H_2O$ at temperatures of 873-973°K (600°C -700°C). Kruissink et al., *J. Chemical Society, Faraday Trans. I*, Volume 77, 649-663, 1981, discusses the thermal treatment of nickel-containing compositions having x-ray patterns characteristic of the hydrotalcite-like

minerals; and Hernandez et al., Thermochemica Acta, Volume 81, 311-318, 1984, investigated the thermal decomposition of hydrotalcite-like compounds of formula $[\text{Ni}_{(1-x)}\text{Al}_x(\text{OH})_2]^{x+} \text{X}^{n-}_{x/n} \cdot m\text{H}_2\text{O}$ where $0.25 \leq x \leq 0.33$ and X is carbonate and sulfate. Using x-ray diffraction studies, these researchers identified nickel oxide as the decomposition product at temperatures above 600°C, whereas the corresponding spinel, NiAl_2O_4 , was formed at temperatures higher than 1000°C. British Patent 1,342,020, discloses catalysts having chemical composition $\text{Ni}_6\text{Al}_2\text{CO}_3(\text{OH})_{16} \cdot 4\text{H}_2\text{O}$ and $\text{Ni}_3\text{Mg}_3\text{Al}_2\text{CO}_3(\text{OH})_{16} \cdot 4\text{H}_2\text{O}$ and discloses that they have an application as hydrogenation, dealkylation and cracking catalysts. Clause et al, J. of Catalysis, Volume 133, 231-246 (1992) discloses the preparation and analysis of nickel-aluminum mixed oxides obtained by thermal decomposition of hydrotalcite-type precipitates. This paper also discloses that nickel-aluminum mixed oxides resulting from the thermal decomposition of hydrotalcite-like coprecipitates have been studied for steam reforming and methanation reactions.

Summary of the Invention

In one aspect, this invention is a method for preparing synthesis gas comprising feeding a gaseous or vaporizable hydrocarbyl compound and an oxygen-containing gas to a suitable reaction zone containing a catalyst formed by heat treating a nickel containing hydrotalcite-like compound, and reacting the hydrocarbyl compound and the oxygen-containing gas in the presence of the catalyst at a temperature and at a pressure sufficient to form synthesis gas. The oxygen-containing gas comprises molecular oxygen, carbon dioxide, water or any mixture containing two or more thereof.


In another aspect, this invention is reforming catalysts formed by heat treating to temperatures of at least about 700°C a catalyst precursor composition comprising at least one hydrotalcite-like compound having the formula:



where M^{2+} is a metal ion having a valence of 2+ and is at least Ni^{2+} or preferably, a mixture of Ni^{2+} and Mg^{2+} , optionally with one or more metals having a valence of 2+ and preferably selected from Cu^{2+} , Co^{2+} , Zn^{2+} , Fe^{2+} or Mn^{2+} ; M^{3+} is a metal ion having a valence of 3+ and suitably selected from Al^{3+} , Ga^{3+} , Ni^{3+} , Co^{3+} , Fe^{3+} , Mn^{3+} , Cr^{3+} , V^{3+} , Ti^{3+} , La^{3+} or In^{3+} , preferably M^{3+} is at least Al^{3+} , optionally with one or more selected from

Ga³⁺, Ni³⁺, Co³⁺, Fe³⁺, Mn³⁺, Cr³⁺, V³⁺, Ti³⁺, La³⁺ or In³⁺; x is a number of about 0.1 to about 0.50, wherein the value of x and (1-x) are obtained by combining all of the metal ions having a 3+ valence, and 2+ valence, respectively; Aⁿ⁻ is an anion having a negative charge of n, and n can suitably be 1 to about 10; and m is 0 or a positive number. A mixture of anions can also be used.

In another aspect, this invention is a hydrotalcite-like catalyst precursor compound having the formula:



wherein M²⁺ is a metal ion having a valence of 2+ and is at least a mixture of Ni²⁺ and Mg²⁺, optionally with one or more other metal ions having a valence of 2+, and preferably selected from Cu²⁺, Co²⁺, Zn²⁺, Fe²⁺ or Mn²⁺; M³⁺ is a metal ion having a valence of 3+ and is at least Al³⁺, optionally with one or more other metal ions having a valence of 3+, and preferably selected from Ga³⁺, Ni³⁺, Co³⁺, Fe³⁺, Mn³⁺, Cr³⁺, V³⁺, Ti³⁺, La³⁺ or In³⁺; x is a number greater than about 0.25 to about 0.50; Aⁿ⁻ is an anion having a negative charge n, wherein n can be 1 to about 10; and m is 0 or a positive number.

In still another aspect, this invention is a nickel-containing catalyst composition comprising a mixture of M²⁺O, M²⁺Al₂O₄ spinel, and a hybrid phase comprising a M²⁺O component and a M²⁺Al₂O₄ spinel component in the same crystallite, wherein these components are joined to each other in the crystallite through an epitaxial interface. Catalyst having this hybrid phase component are highly active in the reforming method of this invention. M²⁺ in this hybrid phase is at least Ni²⁺ and can be a mixture of Ni²⁺ and some other metal ion, preferably at least one other metal having a valence of 2+.

Brief Description of the Figures


Figure 1 is a photomicrograph, obtained using high resolution electron microscopy, of a catalyst of the invention after thermal activation of the catalyst under non-reforming conditions.

Figure 2 is a photomicrograph, obtained using high resolution electron microscopy, of a catalyst of this invention after use as a reforming catalyst.

Figure 3 is a schematic representation of the structure of the nickel-containing catalysts of this invention under reforming conditions.

Detailed Description of the Invention

The catalytic materials useful in the method of this invention for preparing synthesis gas are suitably prepared by heat treating a catalyst precursor composition comprising one or more hydrotalcite-like compounds comprising the formula:



where M^{2+} is Ni^{2+} or a mixture of Ni^{2+} and at least one other metal ion, preferably having a 2+ valence and more preferably selected from Ca^{2+} , Cd^{2+} , Co^{2+} , Cu^{2+} , Fe^{2+} , Mg^{2+} , Mn^{2+} , Pd^{2+} , Pt^{2+} , Sr^{2+} , Ti^{2+} , V^{2+} , Zn^{2+} and Zr^{2+} . The atomic ratio of Ni^{2+} to other metal ion or ions present having a 2+ charge is suitably in the range of about 100:1 to about 0.05:1, preferably 5:1 to about 0.1:1.

M^{3+} in the formula above is at least one metal ion having a valence of 3+ and is preferably selected from Al^{3+} , B^{3+} , Cr^{3+} , Fe^{3+} , Ga^{3+} , In^{3+} , La^{3+} , Ni^{3+} , Co^{3+} , Mn^{3+} , Rh^{3+} , Ti^{3+} , V^{3+} and the trivalent lanthanum metal ions. Preferably M^{3+} is at least Al^{3+} . When a mixture of Al^{3+} and at least one other metal ion having a valence of 3+ are present, the atomic ratio of Al^{3+} to the other M^{3+} ion or ions present is suitably about 100:1 to about 0.05:1.

The anion, A, in the formula (1) above can be any anion that provides for a hydrotalcite-like structure and can be, for example, carbonate, nitrate, a halide (e.g. Cl^- , Br^-), chlorate, sulfate, hydroxide, oxide, carboxylates and polycarboxylates; particularly those having one to about 20 carbon atoms, including, for example, acetate, benzoate, the phthalates, and the like, phosphates, boron containing anions, metalates of metals from Group Vb of the Periodic Table of Elements, metalates of metals of Group VIb of the Periodic Table. Examples of borates and metalates include, $B(OH)_4^-$, $[B_3O_3(OH)_4]^-$, $[B_3O_3(OH)_5]^{2-}$, $[B_4O_5(OH)_4]^{2-}$, $V_2O_7^{4-}$, $HV_2O_7^{3-}$, $V_4O_{12}^{4-}$, $V_3O_9^{3-}$ and $V_{10}O_{28}^{6-}$. Examples of phosphates include PO_4^{3-} , HPO_4^{2-} and $H_2PO_4^-$. Other anions that can be used include $Nb_6O_{19}^{8-}$, $HNb_6O_{19}^{7-}$, $H_2Nb_6O_{19}^{6-}$, NbO_4^{3-} , $Ta_6O_{19}^{8-}$, $HTa_6O_{19}^{7-}$, TaO_4^{3-} , $Mo_7O_{24}^{6-}$, $HW_6O_{21}^{5-}$, and Keggin-type anions such as $PW_{11}O_{39}^{7-}$ and $SiW_{11}O_{38}^{7-}$ which are stable at a pH above 6. The value x is about 0.1 to about 0.5, preferably 0.25 to about 0.45. The value n is suitably about 1 to about 10. The amount of water present in the hydrotalcite-like catalyst precursor is variable. The amount of water can be such that the value m in the formula above is about 0 to about 2.

For example, a hydrotalcite-like compound corresponding to $[\text{Ni}_{0.625}\text{Cu}_{0.125}\text{Al}_{0.25}(\text{OH})_2]^{0.25}(\text{CO}_3)_{0.125} \cdot 0.5\text{H}_2\text{O}$ is a suitable precursor compound for preparing an active catalyst for the reforming of methane according to the method of this invention. In this formula, Ni and Cu have a valence of 2+; Al has a valence of 3+; and $x = 0.25$ and m is 0.5. However, it is more convenient to express this formula using whole numbers; therefore, if the fractional numbers are multiplied by 8, the same formula can be expressed as: $[\text{Ni}_5\text{CuAl}_2(\text{OH})_{16}]\text{CO}_3 \cdot 4\text{H}_2\text{O}$. Specific formulas for the hydrotalcite-like compounds are represented herein using whole numbers.

Another example of a suitable hydrotalcite-like catalyst precursor compound is $[\text{NiZnMg}_2\text{Al}_2(\text{OH})_{12}]\text{Mo}_2\text{O}_7 \cdot 4\text{H}_2\text{O}$. In this compound, $x = 0.333$, $n = 2$, $m = 0.666$, and the formula has been multiplied by 6 to convert the fractional numbers to whole numbers. Another example is a compound having formula $[\text{Ni}_4\text{Zn}_2\text{Cu}_2\text{Mg}_4\text{Al}_4(\text{OH})_{32}]\text{V}_4\text{O}_{12} \cdot 8\text{H}_2\text{O}$. In this formula, $x = 0.25$, $n = 4$, $m = 0.5$, and it has been multiplied by 16 to convert the fractional numbers in the formula to whole numbers.

Preferred hydrotalcite-like catalyst precursor compounds useful in the method of this invention are those compounds having the formula (1) above where M^{2+} is Ni^{2+} , a mixture of Ni^{2+} and Mg^{2+} , a mixture of Ni^{2+} and Cu^{2+} or a mixture of Ni^{2+} , Cu^{2+} and Mg^{2+} and where M^{3+} is Al^{3+} . In these preferred catalyst precursor compositions, wherein a mixture of nickel and magnesium and/or copper are used, the molar ratio of Ni^{2+} to Mg^{2+} and/or Cu^{2+} is in the range of about 1:100 to about 100:1. Specific examples of preferred hydrotalcite-like catalyst precursor compounds are:

$[\text{Ni}_8\text{Al}_2(\text{OH})_{20}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_6\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_5\text{MgAl}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_4\text{Mg}_2\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_3\text{Mg}_3\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_2\text{Mg}_4\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{NiMg}_5\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_4\text{Al}_2(\text{OH})_{12}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_3\text{MgAl}_2(\text{OH})_{12}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_2\text{Mg}_2\text{Al}_2(\text{OH})_{12}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{NiMg}_3\text{Al}_2(\text{OH})_{12}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_{14}\text{Al}_6(\text{OH})_{40}](\text{CO}_3)_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_{12}\text{Mg}_2\text{Al}_6(\text{OH})_{40}](\text{CO}_3)_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_1\text{Mg}_{13}\text{Al}_6(\text{OH})_{40}](\text{CO}_3)_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_3\text{Al}_2(\text{OH})_{10}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_2\text{MgAl}_2(\text{OH})_{10}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_1\text{Mg}_2\text{Al}_2(\text{OH})_{10}]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_2\text{Al}_2(\text{OH})_8]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{NiMgAl}_2(\text{OH})_8]\text{CO}_3 \cdot y\text{H}_2\text{O}$; $[\text{Ni}_2\text{MgCuAl}_2(\text{OH})_{12}]\text{CO}_3 \cdot y\text{H}_2\text{O}$, $\text{Ni}_2\text{Cu}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3 \cdot y\text{H}_2\text{O}$; and the like, and where y in these formulas is 0-20.

A particularly preferred group of catalyst precursor compounds that are useful in the method of this invention are those hydrotalcite-like

compounds having the formula (1) above where M^{2+} is a mixture of Ni^{2+} and Mg^{2+} , but can also contain one or more other metal ions having a 2+ valence, and preferably selected from Cu^{2+} , Co^{2+} , Zn^{2+} , Fe^{2+} or Mn^{2+} ; M^{3+} is a metal ion having a valence of 3+ and is at least Al^{3+} , optionally with one or more other metal ion having a valence of 3+, and preferably selected from Ga^{3+} , Ni^{3+} , Co^{3+} , Fe^{3+} , Mn^{3+} , Cr^{3+} , V^{3+} , Ti^{3+} , La^{3+} or In^{3+} ; x is a number greater than about 0.25, more preferably greater than about 0.28 to about 0.50, more preferably to about 0.45; A^{n-} is an anion, for example, as described above, having a negative charge n, and m is 0 or a positive number. Catalyst formed from these precursor compounds demonstrate higher activity and superior resistance to coke formation during the reforming reaction disclosed herein.

Another particularly preferred group of catalyst precursor compounds are those hydrotalcite-like compounds having formula (1) where M^{2+} is at least, and preferably is, a mixture of Ni^{2+} and Cu^{2+} , and where M^{3+} is at least Al^{3+} and preferably is Al^{3+} ; where x is about 0.1 to about 0.5, preferably about 0.25 to about 0.45; A is an anion, preferably as discussed hereinabove, having negative charge n; and m is 0 or a positive number, preferably 0-2.


The hydrotalcite-like catalyst precursor compounds described herein are activated through heat treatment, i.e. they are thermally activated. The heat treatment is typically conducted by subjecting the hydrotalcite-like compound to a temperature greater than about 700°C, preferably at least about 720°C, more preferably at least about 750°C, and most preferably at least about 800°C, for a time sufficient to convert the hydrotalcite-like catalyst precursor compound into an active catalyst for the reforming of hydrocarbyl compounds. This heating can be done prior to using the catalyst precursor for a reforming reaction, or it can be done in the reactor apparatus used for the reforming reaction, preferably under reforming conditions, and more preferably under the reaction conditions used for the preparation of synthesis gas by the reaction of a hydrocarbyl compound with molecular oxygen or carbon dioxide as described hereinbelow. For example, the temperature used for the reforming reactions are typically sufficiently high to activate the catalyst precursor compounds. During the heat treatment to form the active catalyst, the hydrotalcite-like compounds first lose water that is located between the hydroxide layers. This typically occurs at temperatures in the range of about 200 to about 250°C. This is a reversible

reaction, however, since the dehydrated hydrotalcite-like compositions can be again hydrated to restore their original hydrotalcite-like structures. Upon heating to higher temperatures, for example, temperatures in excess of 450°C, another change occurs in the catalyst precursor where there is a loss of the anion, if it is volatile, or, for example, the anion loses water if it is not volatile. However, this transformation does not irreversibly destroy the layer structure of the hydrotalcite-like composition since a layer structure can be restored by replacing the anion or hydrating the anion. Upon heating to still higher temperatures, for example, temperatures in excess of about 700°C, there is an irreversible loss of layer structure, and these heat-activated compositions are the active catalysts for the reforming of hydrocarbyl compounds according to the method of this invention.

We have determined that when the nickel-containing hydrotalcite-like catalyst precursor compounds disclosed herein are heated or thermally-activated at temperatures greater than about 700°C, preferably in the range of about 800°C to about 1050°C, a new hybrid phase component is formed. Evaluation of heat treated $[\text{Ni}_4\text{Al}_2(\text{OH})_{12}]\text{CO}_3 \cdot 4\text{H}_2\text{O}$ and $[\text{Ni}_2\text{Mg}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3 \cdot 4\text{H}_2\text{O}]$ compounds by High Resolution Transmission Electron Microscopy showed that the heat-treated samples contain a new hybrid phase comprising a mixture of NiO or NiO/MgO, and NiAl_2O_4 spinel or $\text{NiAl}_2\text{O}_4/\text{MgAl}_2\text{O}_4$ spinel or $\text{Ni/MgAl}_2\text{O}_4$ spinel in the same crystallite, wherein the NiO or NiO/MgO phase and the spinel phase are joined in the same crystallite by an epitaxial interface. By epitaxial interface, we mean an area in a single crystallite where, between two distinct crystalline species in the same crystallite, the two crystalline species coexist and yet form a well defined interface. Catalyst compositions containing this hybrid phase are highly active in the reforming method of this invention. Thus, this invention is a catalyst composition comprising a hybrid catalyst component comprising a M^{2+}O component and a $\text{M}^{2+}\text{Al}_2\text{O}_4$ spinel component in the same catalyst crystallite, wherein the M^{2+}O component of the crystallite and the $\text{M}^{2+}\text{Al}_2\text{O}_4$ component of the crystallite are joined through an epitaxial interface. M^{2+} in this hybrid catalyst component is at least Ni^{2+} and can be Ni^{2+} and some other metal ion, preferably having a valence of 2+, and preferably selected from Mg^{2+} , Cu^{2+} , Co^{2+} , Zn^{2+} , Fe^{2+} or Mn^{2+} . These crystallites comprising the hybrid phase are typically about 5 to about 400 nm in size, preferably 5 to about 100 nm in size. This catalyst composition comprising the hybrid phase can be prepared by heating one or more of the herein described

nickel-containing hydrotalcite-like precursor compounds to a temperature in the range of about 800°C to about 1050°C, and preferably by heating a nickel-containing hydrotalcite-like catalyst precursor compound wherein the M²⁺ metal ion in the formula $[M^{2+}_{(1-x)}M^{3+}_x(OH)_2]^{x+}(A_{x/n}^{n-}) \cdot mH_2O$ is at least Ni²⁺ or preferably a mixture of Ni²⁺ and Mg²⁺, and wherein M³⁺ is at least Al³⁺.

The preferred catalyst compositions of this invention for preparing synthesis gas are those compositions formed by heat treating one or more hydrotalcite-like compounds having the formula:



where M²⁺ is a metal ion with a valence of 2+ and is at least Ni²⁺ or, preferably, a mixture of Ni²⁺ and Mg²⁺, optionally with one or more metal ions having a valence of 2+ and preferably selected from Cu²⁺, Co²⁺, Zn²⁺, Fe²⁺ or Mn²⁺, more preferably selected from Cu²⁺ or Zn²⁺; where M³⁺ is a metal ion having a valence of 3+ and is suitably selected from at least one of Al³⁺, Ga³⁺, Ni³⁺, Co³⁺, Fe³⁺, Mn³⁺, Cr³⁺, V³⁺, Ti³⁺, La³⁺ or In³⁺, preferably M³⁺ is at least Al³⁺, optionally with one or more selected from the Ga³⁺, Ni³⁺, Co³⁺, Fe³⁺, Mn³⁺, Cr³⁺, V³⁺, Ti³⁺, La³⁺ or In³⁺, and, most preferably, M³⁺ is Al³⁺; where x is a number of about 0.1 to about 0.50, preferably 0.25 to about 0.45, wherein the value x and (1-x) are obtained by combining all of the metal ions having a 3+ valence, and 2+ valence, respectively, where the anion Aⁿ⁻ is an anion having a negative charge of n and is an anion that provides for a hydrotalcite-like structure, and is suitably selected from carbonate, nitrate, a halide, sulfate, chlorate, hydroxide, oxide, carboxylate, phosphates, boron containing anions, Group Vb and Vlb metalates, and the like, and, preferably, A is carbonate; and where the value of m is 0 or a positive number, preferably 0 to about 2. Particularly, preferred catalyst compositions are those herein above described hydrotalcite-like compounds that have been exposed to the reactants and reaction conditions used for the preparation of synthesis gas by the reaction of a hydrocarbyl compound with molecular oxygen, or by the reaction of a hydrocarbyl compound with carbon dioxide.

A preferred group of anions useful in the hydrotalcite-like compounds used to make catalysts is the group consisting of molybdates and polyoxomolybdates, for example Mo₇O₂₄⁶⁻, MoO₄²⁻, MoO₄⁻, and the like. These molybdates and polyoxomolybdates are preferred because they will impart coke reducing capability to the catalyst composition of this invention.

The hydrotalcite-like precursor compounds used in the method of this invention can be prepared by using procedures known in the art. However, one procedure for preparing these hydrotalcite-like compounds comprises combining in solution, preferably in aqueous solution, a nickel 2+ compound, optionally with one or more of the other metal ions discussed hereinabove having a 2+ valence, with one or more metal ions as described hereinabove having a 3+ valence. Suitable metal compounds are the nitrates, chlorides, sulfates, and the like. The solution containing the 2+ and 3+ metal ion is combined with a solution of the desired anion, A, or a precursor to the anion. For example, A may be CO_3^{2-} , SO_4^{2-} , Cl^- , etc. An anion precursor is a compound which produces the desired anion under the reaction conditions used to prepare the hydrotalcite-like compound. For example, NaVO_3 is a precursor to the anion $\text{V}_2\text{O}_7^{4-}$ because, at a reaction mixture pH of 10-11, NaVO_3 yields $\text{V}_2\text{O}_7^{4-}$. The pH dependent behavior of some transition element metalates is described in Kepert, D. L., "The Early Transition Metals," Academic Press, London (1972).

Additionally, the pH of the reaction mixture used to form the hydrotalcite-like precipitate should be such that all of the M2+ and M3+ ions selected for a particular hydrotalcite-like composition are incorporated in the coprecipitate. The table presented below shows the approximate pH ranges in which hydrotalcite-like compounds are formed for a selection of metal ions.

Divalent Metal Ion	Trivalent Metal Ion	Approximate pH Range
Mg^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	8 to 12-14
Cu^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	6 to 12-13
Co^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	8 to 12-13
Zn^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	7 to 10-11
Ni^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	6 to 12-13
Mn^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	9 to 12-14
Fe^{2+}	Al^{3+} , Fe^{3+} , Cr^{3+} , Bi^{3+} , Mn^{3+} , Co^{3+}	7 to 12-14

For example, in order to prepare a nickel/aluminum hydrotalcite-like compound having a carbonate anion, the nickel and aluminum salt are combined in water and then added to a carbonate containing solution. From the table above, the approximate pH range to produce the hydrotalcite-like compound is about 6-12. Similarly, if a copper-nickel-aluminum containing hydrotalcite-like compound is desired, the pH range needs to be 6 to 12. If

the desired anion, A^{n-} , is not stable at this pH range, then the hydrotalcite-like structures will not form. If the pH of the reaction mixture used to form the hydrotalcite-like compound requires adjustment, a base such as ammonium hydroxide, an alkali metal hydroxide or a tetralkylammonium hydroxide can be used. If an acid is required to adjust the pH, a mineral acid such as nitric acid or hydrochloric acid can be used. Also, after the proper pH has been achieved, the solution generally requires heating for a period of time, preferably at a temperature of about 40 to 90°C, to accelerate the formation of the hydrotalcite-like precipitate, which can be collected by filtration.

The molar ratio of the 2+ metal ions to 3+ metal ions is preferably about 9:1 to about 1:1. The mole ratio of the anion used to the total of 2+ and 3+ metal ions depends on the charge on the anion to be incorporated. For each metal ion with a 3+ valence, a corresponding negative charge in the anion layer of the hydrotalcite-like compound is required. Generally, a molar excess of anion is used during the preparation of the hydrotalcite-like compound in order to ensure complete reaction.

The 2+ metal ion and 3+ metal ion compounds are optimally mixed together and added slowly, with stirring, to a warmed solution of the anion. As stated above, the resulting solution must have the proper pH. Slower addition and a more elevated temperature (a pressure vessel can be used) tends to produce a product with larger crystals.


Copending U.S. Patent Application Serial No. 07/745,902, filed on August 16, 1991, to Bhattacharyya et al., also discloses the preparation of hydrotalcite-like compounds and the specification of this copending application is hereby specifically incorporated by reference.

In the preferred reforming method of this invention, a vaporizable hydrocarbyl compound and an oxygen containing gas comprising molecular oxygen or carbon dioxide are fed to a suitable reaction zone, which zone contains a catalyst formed by heat treating one or more of the nickel-containing hydrotalcite-like compounds described hereinabove, and reacting the hydrocarbyl compound and the oxygen-containing gas in the presence of the reforming catalyst at reaction conditions sufficient to produce synthesis gas in the form of a mixture of molecular hydrogen and carbon monoxide. The mole ratio of hydrogen to carbon monoxide may vary, however, it is suitably in the range of about 0.1:1 to about 5:1.

The hydrocarbyl compound used in the method of this invention suitably comprises one or more gaseous or vaporizable compounds that can

be reacted with molecular oxygen or carbon dioxide to form synthesis gas. Most suitably, the hydrocarbyl compound is a hydrocarbon, however, various amounts of oxygen or other atoms can also be in the hydrocarbyl molecule. For example, hydrocarbyl compounds that can be converted to synthesis gas include methanol, dimethylether, ethylene oxide, and the like. However, the most preferable hydrocarbyl compounds are the low molecular weight hydrocarbons containing about 1 to about 20 carbons, more preferably 1 to about 10 carbon atoms. Methane and natural gas, which is mainly methane, are readily available, inexpensive, and are the most preferred hydrocarbyl feed materials for the method of this invention. Mixtures of hydrocarbyl and/or hydrocarbon compounds can also be used.

The oxygen-containing gas used in the method of this invention preferably is either a gas comprising molecular oxygen or a gas comprising carbon dioxide. The gas comprising molecular oxygen is used in the method of this invention for preparing synthesis gas by the oxidation of the hydrocarbyl compound to synthesis gas. When methane is the hydrocarbyl compound, this reaction proceeds according to the partial-oxidation reaction described in the following equation:



The oxygen-containing gas used in the method of this invention can be pure molecular oxygen or a mixture of molecular oxygen with one or more other gases such as nitrogen, helium, or some other inert gas. Air is a suitable source of molecular oxygen. The molecular oxygen can be in the oxygen-containing gas at a level of about 1% to about 100%, preferably about 20 to about 100%, most preferably the molecular oxygen containing gas is substantially pure, e.g. 98%, or pure, e.g. +99% molecular oxygen.

The amount of molecular oxygen relative to the hydrocarbyl compound fed to the reactor containing the catalyst derived from the nickel-containing hydrotalcite-like catalyst precursor is such that there is sufficient oxygen to form synthesis gas. When methane is used the molar ratio of molecular oxygen to methane in the feed compound added to the reaction zone is about 1:2. However, when high selectivity to synthesis gas is desired, the ratio of molecular oxygen to methane is about 1:2.1, and when complete methane conversion is desired, the optimal ratio of molecular oxygen to methane is about 1:1.9.

In the method of this invention wherein a hydrocarbyl compound is reacted with molecular oxygen to form synthesis gas, the reaction

temperature is suitably in the range of about 400 to about 1000°C, more preferably about 600 to about 900°C. Additionally, since the reaction of the hydrocarbyl compound with molecular oxygen is exothermic, the heat produced by the process can be used as an energy source to operate other processes in a chemical manufacturing plant. For example, it can be used to generate high pressure steam. The pressure for the reaction of a hydrocarbyl compound with molecular oxygen is suitably in the range of about 0.1 atmospheres absolute to about 50 atmospheres absolute, preferably about 25 atmospheres absolute to about 40 atmospheres absolute. The space velocity is suitably that which provides for the conversion of a major portion of the hydrocarbyl feed to synthesis gas, and preferably the volumetric space velocity is in the range of about 10 hr⁻¹ to about 1 x 10⁹ hr⁻¹, more preferably about 1200 to about 1 x 10⁶ hr⁻¹. The volumetric space velocity being calculated based on the total volume of reactant gases, i.e. the gaseous hydrocarbyl feed component and the molecular-oxygen containing gas component, and the volume of the catalyst in the reactor.

Although other feed materials can be added along with the molecular oxygen-containing gas and the hydrocarbyl feed compound, for example, water or steam, it is generally not necessary to do so. One of the advantages of the method of this invention wherein a hydrocarbyl compound is converted to synthesis gas by reaction with molecular oxygen, is that the nickel-containing catalysts derived from the hydrotalcite-like catalyst precursor compounds are very resistant to coke formation. Therefore, it is not essential to add steam or water to eliminate coking of the catalyst. However, steam or water can be added in order to adjust the ratio of H₂ to CO in the synthesis gas product.

In the method of this invention wherein a gas comprising carbon dioxide is reacted with a hydrocarbyl compound, the gas comprising carbon dioxide is suitably about 1 to about 100% carbon dioxide, more preferably about 20 to about 100% carbon dioxide, and most preferably it is substantially pure carbon dioxide. The gas comprising carbon dioxide can contain other gases, for example, nitrogen, helium, argon and the like, however, as stated above, it is preferable to use substantially pure carbon dioxide.

In the method of this invention wherein hydrocarbyl compounds are reformed to synthesis gas using carbon dioxide, the addition of water or

steam is beneficial to reduce the coking of the catalyst. The amount of steam present should be an amount sufficient to control the formation and deposition of coke on the catalyst so that deactivation does not occur. Preferably, the amount of water in the form of steam is suitably about 10 to
5 about 50 percent of the feed gases, more preferably about 20 to about 30 percent of the total feed gas. Other materials can be added to the total feed gases to promote the longevity of the catalyst. For example, hydrogen sulfide, or other source of sulfur, preferably a volatile source of sulfur, can be added along with the feed gas to the carbon dioxide reforming reaction. If
10 used, hydrogen sulfide or other volatile sulfur-containing compound, e.g. an alkyl thiol, dialkyl sulfide or dialkyl disulfide, is present in the feed at a level of about 10 parts per million by weight to about 100 parts per million by weight, based on the total feed gas. However, we have determined that the catalysts of this invention are effective for reforming hydrocarbyl compounds
15 without the use of a sulfur-containing compound in the feed gas.

The amount of carbon dioxide relative to the hydrocarbyl compound fed to the reactor containing the catalyst derived from the nickel-containing, hydrotalcite-like catalyst precursor is such that there is sufficient carbon dioxide to effectively convert the hydrocarbyl compound to synthesis gas.
20 Suitably, the molar ratio of carbon dioxide to carbon in the hydrocarbyl feed compound is at least about 0.8:1, preferably about 1:1 to about 5:1, most preferably about 1:1 to about 2:1.

The reaction temperature for the reforming of a hydrocarbyl compound using carbon dioxide is suitably in the range of about 750 to
25 about 950°C, more preferably about 850 to about 900°C. The pressure for the reaction of the hydrocarbyl compound with carbon dioxide is suitably in the range of about 0.1 atmosphere absolute to about 50 atmospheres absolute, more preferably about 10 atmospheres absolute to about 35 atmospheres absolute. The space velocity for this reaction is suitably that
30 which provides for the conversion of a major portion of the hydrocarbyl compound, preferably methane, to synthesis gas. Suitable volumetric space velocities are in the range of 1000 hr⁻¹ to about 1x10⁶ hr⁻¹, more preferably about 1x10⁴ hr⁻¹ to about 1x10⁵ hr⁻¹. The volumetric space velocity being calculated based on the total volume of gas entering the reactor containing
35 the catalyst and the volume of the catalyst.

The nickel-containing compounds described herein prepared by heat treating the nickel-containing hydrotalcite-like compounds can also be used

for the steam reforming of a hydrocarbyl compound where water is the oxygen-containing gas. Preferably the hydrocarbyl compound is methane or natural gas. The reaction temperature for the steam reforming reaction is suitably greater than about 700°C, more preferably at least about 720°C and most preferably in the range of about 800°C to about 1000°C. The pressure is suitably at least about 0.1 to about 75 atmosphere absolute. The space velocity of the feed gas for the steam reforming reaction is suitably that which provides for the conversion of the major portion of the hydrocarbyl compound to synthesis gas. Suitable volumetric space velocities are in the range of about 1000 hr⁻¹ to about 1x10⁶ hr⁻¹, preferably about 1x10⁴ hr⁻¹ to about 1x10⁵ hr⁻¹. The volumetric space velocity being calculated based on the total volume of gas entering the reactor containing the catalyst and the volume of the catalyst. The mole ratio of water-to-carbon in the feed gas is suitably about 10:1 to about 2:1; preferably about 8:1 to about 3:1. However, an advantage of the catalysts of this invention is that they do not readily form coke. Consequently, molar ratios of water (steam) to carbon in the hydrocarbyl portion of the feed can be low; for example, less than about 2:1, more preferably less than about 1.6:1, most preferably about 1:1. Preferably, the mole ratio of water to carbon in the feed gas is at least about 0.5:1. The ability to use low molar ratios of water to carbon is desirable because the synthesis gas product has a low ratio of hydrogen-to-carbon monoxide.

The active reforming catalysts of this invention formed during the reforming reaction described herein comprises metal particles comprising at least nickel metal (nickel in the zero oxidation state) and optionally containing one or more metals selected from Cu, Co, Fe, Mn, Pd, Pt and Zn in the zero oxidation state, wherein the zero oxidation state metal particles are mostly, more preferably substantially, and most preferably completely surrounded by crystallites having a spinel structure. The spinel crystallites comprise either M³⁺₂O₃ and/or M²⁺M₂³⁺O₄ where M²⁺ is a metal in the +2 oxidation state and is preferably at least one of Mg²⁺, Zn²⁺, Ni²⁺, Fe²⁺, Cu²⁺, Co²⁺, Mn²⁺, Pd²⁺ or Pt²⁺, and M³⁺ is a metal in the +3 oxidation state and is preferably at least one of Al³⁺, B³⁺, Cr³⁺, Fe³⁺, Ga³⁺, In³⁺, La³⁺, Ni³⁺, Co³⁺, Mn³⁺, Rh³⁺, Ti³⁺, V³⁺ and the lanthanum 3+ ions. Most preferably, the M³⁺ in the spinels is Al³⁺ and most preferably M²⁺, if present, is Mg²⁺. The metal particles are suitably in the range of about 1 to about 1000 nanometers (nm) in size, preferably about 10 to about 500 nm in size. The atomic ratio of nickel to other metals, if present, in the metal particles is

suitably in the range of about 100:1 to about 0.05:1, preferably about 5:1 to about 0.1:1. The spinel crystallites are suitably no more than about 200 nm in size, preferably no more than about 60 nm in size. Most preferably, the spinel crystallites are about 5 to about 30 nm in size. The mole ratio of the metals in the zero oxidation state to the spinel in the active reforming catalyst is typically about 20:1 to about 1:20. As used in this description of the spinel crystallites surrounding the active reforming catalyst, "mostly" means, on average, at least 50% of the exterior surface area of the metal particles; "substantially" means, on average, at least 80% of the exterior surface area of the metal particles; and "completely" means, on average, 95-100% of the surface area of the metal particles. As used in this description of the active reforming catalyst, "crystallite" means small crystals. Spinels are well-known crystal structures and are described, for example, in A. F. Wells', "Structural Inorganic Chemistry," Claredon Press, Oxford, 1987. The active reforming catalyst is most suitably prepared by treating, under reforming reaction conditions as described herein, the nickel-containing hydrotalcite-like compositions described herein, preferably under the reaction conditions used for the preparation of synthesis gas by the reaction of a hydrocarbyl compound with molecular oxygen or carbon dioxide as described herein.

The type of reactor used in the method of this invention is any type reactor that can be used to conduct a gas phase reaction over a heterogeneous, solid catalyst. For example, a fixed bed reactor, a fluidized bed reactor and the like.

The catalyst compositions described herein above can be used as such, or they can be supported on one or more inert support materials such as alpha alumina, silica, and the like. Preferably the catalyst composition, either supported or unsupported, are formed into shapes that are suitable for use in gas-phase reaction vessels, e.g. spheres, cylinders, rings, etc.

Detailed Description of the Figures

Figure 1 is a photomicrograph of a nickel-containing catalyst of this invention. The photomicrograph was obtained using a JEOL JEM 2000 EX high resolution electron microscope operating at 200 kv. Thin sections (about 20-40 nanometers in thickness) of the catalyst were used for the analysis. This figure shows the [011] projection of a typical microcrystal in the catalyst. In the center portion of the crystal, there is the coexistence of two phase domains, an NiO face center cubic structure (FCC, crystal

symmetry Fm3m) with a lattice constant of $a = 4.18$ Angstroms, and NiAl_2O_4 which has a spinel structure (crystal symmetry Fd3m) with lattice constant of $a = 8.05$ Angstroms. (The lattice constants were calculated from the data in the photomicrograph.) The two phases are epitaxially related ([1,1,1] NiO is parallel to [1,1,1] spinel), and the epitaxial interfaces are indicated by the arrows. The catalyst composition shown in Figure 1 was obtained by calcining a $\text{Ni}_4\text{Al}_2\text{OH}_{12}\text{CO}_3 \cdot 4\text{H}_2\text{O}$ hydrotalcite-like compound at 850°C in air. This composition corresponds to that of Example 8.

Figure 2 is a photomicrograph (obtained using the same instrument as described for Figure 1) of a thin section of the catalyst shown in Figure 1 after the catalyst was used for one day as a CO_2 reforming catalyst for the conversion of methane to synthesis gas. This figure shows that the structure has changed to comprise metallic nickel particles (FCC, crystal symmetry Fm3m, and $a = 3.52$ Angstroms). The nickel particles are surrounded or "decorated" by crystallites of alumina spinel (Fd3m, $a = 7.911$ Angstroms) 10 to 20 nanometers (nm) in size. The arrows point out a twin in one of the nickel particles.

Figure 3 depicts, in schematic form, the structure of the nickel-containing catalysts of this invention during use as a CO_2 reforming catalyst. The schematic represents the results of actual analyses using electron microscopy as described above. As described for Figure 2, the catalyst after one day comprises nickel metal particles typically 25-200 nm in size. The nickel particles show some evidence of coke; i.e., about 1 in 20 nickel particles exhibits a very minor coating of graphitic carbon. The particles exhibiting the slight coating of graphitic carbon are typically those particles that are not surrounded by spinel crystallites. As described above for Figure 2, the nickel particles are decorated with alumina spinel crystallites. The catalyst after one day also contains a minor amount of hexagonal plates of aluminum oxide. After 5 days of catalyst use, the nickel particles have increased somewhat in size to 50-400 nm. However, coking of the nickel particles actually diminished. Thus, the catalyst demonstrated a surprising resistivity to coke formation. After 14 days on stream, coke formation was still low as with the 5-day catalyst. The nickel particles remained 50-400 nm in size. The catalyst also contained a minor amount of hexagonal plates of aluminum oxide. The unique structure of the catalyst, wherein the nickel particles are decorated with the alumina spinel, appears to contribute to the low coking of the nickel metal sites.

The following examples are being presented to illustrate certain embodiments of the invention disclosed herein; however, they should not be construed as limiting the scope thereof.

EXAMPLES

5 Example 1

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized water, 7.95g (0.075 mol) of NaCO_3 , and 24.0g (0.6 mol) of NaOH pellets. A second solution containing 10.91g (0.0375 mol) of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, 48.08g
10 (0.1875 mol) of $\text{Mg}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ and 28.14g (0.075 mol) of $\text{Al}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$, and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 hour. After addition was complete, the gelatinous mixture (pH = 8.9) was heated for about 15 hrs. at 80-85°C. The cooled mixture was filtered, washed repeatedly with water, and dried
15 overnight under vacuum at 70°C. The XRD of the material showed a typical hydrotalcite-like structure with d(001) value of 7.7 Å. This material corresponds to the formulation $[\text{NiMg}_5\text{Al}_2(\text{OH})_{16}]\text{CO}_3 \cdot 4\text{H}_2\text{O}$.

Example 2

The material described in Example 1 was calcined by placing a
20 weighed amount of the material in a calciner and raising the temperature at 20°C/min. until a temperature of 450 to 500°C was reached. The material was kept at that temperature for about 15 hours and then sieved to different mesh sizes. These sized materials were further calcined at 850°C.

Example 3

25 A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized water, 7.95g (0.075 mol) of NaCO_3 , and 18.0g (0.45 mol) of NaOH pellets. A second solution containing 10.91g (0.0375 mol) of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, 28.85g (0.1125 mol) of $\text{Mg}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ and 28.14g (0.075 mol) of $\text{Al}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$,
30 and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 h. The rest of the preparation was similar to Example 1. This material corresponds to the formulation $\text{NiMg}_3\text{Al}_2(\text{OH})_{12} \text{CO}_3 \cdot 4\text{H}_2\text{O}$.

Example 4

The material described in example 3 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at 20°C/min. until a temperature of 450 to 500°C was reached. The material
5 was kept at that temperature for about 15 h and then sieved to different mesh sizes. These sized materials were further calcined at 850°C.

Example 5

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized
10 water, 10.6g (0.1 mol) of NaCO₃, and 24.0g (0.6 mol) of NaOH pellets. A second solution containing 29.08g (0.1 mol) of Ni(NO₃)₂•6H₂O, 25.64g (0.1 mol) of Mg(NO₃)₂•6H₂O and 37.51g (0.1 mol) of Al(NO₃)₃•9H₂O, and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 hour. After addition was complete, the
15 gelatinous mixture (pH = 8.5) was heated for about 15 hours at 80-85°C. The cooled mixture was then filtered, washed repeatedly with water, and dried overnight under vacuum at 70°C. The XRD of the material showed a typical hydrotalcite-like structure with d(001) value of 7.6 Å. This material corresponds to the formulation [Ni₂Mg₂Al₂OH₁₂]CO₃•4H₂O.

Example 6

The material described in example 5 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at 20°C/min. until a temperature of 450 to 500°C was reached. The material
20 was kept at that temperature for about 15 hours and then sieved to 12-20 mesh. This material was further calcined at 850°C. The XRD pattern of this catalyst shows only weak peaks due to NiO.

Example 7

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized
30 water, 7.95g (0.075 mol) of NaCO₃, and 18.0g (0.45 mol) of NaOH pellets. A second solution containing 43.62g (0.15 mol) of Ni(NO₃)₂•6H₂O and 28.13g (0.075 mol) of Al(NO₃)₃•9H₂O, and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 hour. After addition was complete, the gelatinous mixture was heated for about 15
35 hours at 80-85°C. The cooled mixture was then filtered, washed repeatedly with water, and dried overnight under vacuum at 70°C. The XRD of the

material shows typical hydrotalcite-like structure with $d(001)$ value of 7.6 Å. This material corresponds to the formulation $[\text{Ni}_4\text{Al}_2(\text{OH})_{12}]\text{CO}_3 \cdot 4\text{H}_2\text{O}$.

Example 8

5 The material described in Example 7 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at $20^\circ\text{C}/\text{min.}$ until a temperature of 450 to 500°C was reached. The material was kept at that temperature for about 15 hours and then sieved to 12-20 mesh. The XRD pattern of this material shows some weak peaks due to NiO. Further calcination of this material up to a temperature of about 850°C did
10 not change the nature of this material as evident from the XRD.

Example 9

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized water, 5.30g (0.05 mol) of NaCO_3 , and 18.0g (0.45 mol) of NaOH pellets. A
15 second solution containing 43.62g (0.15 mol) of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ and 18.76g (0.05 mol) of $\text{Al}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$, and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 h. After addition was complete, the gelatinous mixture ($\text{pH}=8.2$) was heated for about 15 h at $80\text{--}85^\circ\text{C}$. The cooled mixture was then filtered, washed
20 repeatedly with water, and dried overnight under vacuum at 70°C . The XRD of the material showed a typical hydrotalcite-like structure with $d(001)$ value of about 7.9Å. This material corresponds to the formulation $\text{Ni}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3 \cdot 4\text{H}_2\text{O}$

Example 10

25 The material described in Example 9 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at $20^\circ\text{C}/\text{min.}$ until a temperature of 450 to 500°C was reached. The material was kept at that temperature for about 15 h and then sieved to different mesh sizes. These sized materials were further calcined at 850°C .

Example 11

30 A synthesis very similar to that of Example 9 was performed with the exception that the amount of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$ used was 0.2 moles instead of 0.15 moles. This material corresponds to the formulation $\text{Ni}_8\text{Al}_2(\text{OH})_{20}\text{CO}_3 \cdot y\text{H}_2\text{O}$.

Example 12

The material described in example 11 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at 20°C/min. until a temperature of 450 to 500°C was reached. The material was kept at that temperature for about 15 h and then sieved to different mesh sizes. These sized materials were further calcined at 850°C.

Example 13

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized water, 7.95g (0.075 mol) of NaCO₃, and 18.0g (0.45mol) of NaOH pellets. A second solution containing 21.81g (0.075 mol) of Ni(NO₃)₂•6H₂O, 17.44g (0.075 mol) of Cu(NO₃)₂•6H₂O and 28.14g (0.075 mol) of Al(NO₃)₃•9H₂O, and 375 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 h. After addition was complete, the gelatinous mixture (pH = 8.6) was heated for about 15 h at 80-85°C. The cooled mixture was then filtered, washed repeatedly with water, and dried overnight under vacuum at 70°C. The XRD of the material showed a typical hydrotalcite-like structure with d(001) value of 7.5 Å. The material corresponds to the formulation Cu₂Ni₂Al₂(OH)₁₂CO₃•4H₂O

Example 14

The material described in example 13 was calcined by placing a weighed amount of the material in a calciner and raising the temperature at 20°C/min. until a temperature of 450 to 500°C was reached. The material was kept at that temperature for about 15 h and then sieved to different mesh sizes. These sized materials were further calcined at 850°C.

Example 15

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux condenser, and mechanical stirrer was charged with 400 mL deionized water and 19.8g (0.495 mol) of NaOH pellets. A second solution containing 31.99g (0.11 mol) of Ni(NO₃)₂•6H₂O, and 41.27g (0.11 mol) of Al(NO₃)₃•9H₂O, and 340 mL of water was prepared and added dropwise to the first solution while stirring for a period of about 1 h. At this point the pH of the mixture was 9.3. After addition was complete, the gelatinous mixture was heated for about 15 h at 80-85°C. The cooled mixture was then filtered, washed repeatedly with water, and dried overnight under vacuum at 70°C.

The XRD of the material does not show typical hydrotalcite-like structure. This product was calcined at 700°C to yield high NiO spinel, $\text{Ni}_2\text{Al}_2\text{O}_5$.

Example 16

A 1 L, 3-neck round bottom flask equipped with a thermometer, reflux
5 condenser, and mechanical stirrer was charged with 400 mL deionized
water and 22.4g (0.56 mol) of NaOH pellets. A second solution containing
20.37g (0.07 mol) of $\text{Ni}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, and 52.53g (0.14 mol) of
 $\text{Al}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$, and 340 mL of water was prepared and added dropwise to
10 the first solution while stirring for a period of about 1 h. At this point the pH of
the mixture was 10.3. A few drops of HNO_3 were added to reduce the pH to
9.5. After addition was complete, the gelatinous mixture was heated for
about 15 h at 80-85°C. The cooled mixture was filtered, washed repeatedly
with water, and dried overnight under vacuum at 70°C. The XRD of the
material did not show typical hydrotalcite-like structure. This product was
15 calcined at 800°C to yield the spinel, NiAl_2O_4 .

Example 17

A Ni-based commercial catalyst was sieved to 40/60 mesh and used.

Example 18

A Ni-based commercial catalyst, different from Example 17, was
20 sieved to 40/60 mesh and used.

Example 19

A 0.5 L, 3-neck round bottom flask equipped with a thermometer,
reflux condenser, and mechanical stirrer was charged with 200 mL
deionized water, 10.6g (0.075 mol) of NaCO_3 , and 28.0g (mol) of NaOH
25 pellets. A second solution containing 51.3g of $\text{Mg}(\text{NO}_3)_2 \cdot 6\text{H}_2\text{O}$, 37.5g g of
 $\text{Al}(\text{NO}_3)_3 \cdot 9\text{H}_2\text{O}$, and 160 mL of water was prepared and added dropwise to
the first solution while stirring for a period of about 1 h. After addition was
complete, the gelatinous mixture was heated for about 15 h at 80-85°C. The
cooled mixture was then filtered, washed repeatedly with water, and dried
30 overnight under vacuum at 70°C. The XRD of the material shows typical
hydrotalcite-like structure with d(001) value of 7.6 Å.

Example 20

The material described in example 19 was calcined by placing a
weighed amount of the material in a calciner and raising the temperature at
35 20°C/min. until a temperature of 450 to 500°C was reached. The material

was kept at that temperature for about 15 h and then sieved to different mesh sizes. These sized materials were further calcined at 850°C.

Example 21

The catalyst prepared or described in the above examples were
5 evaluated for the formation of synthesis gas by the partial oxidation of methane. The evaluations were conducted using an apparatus consisting of a 12 inch by 16 mm diameter quartz reactor tube mounted vertically in a 3-zone furnace. Each zone was 2 inches. Positioned in the center of the reactor tube was a 4 mm diameter quartz tube. Typically 4 ml of catalyst was
10 loaded in the quartz reactor tube and, using quartz wool plugs, the catalyst bed was positioned in the central heating zone of the furnace. Three thermocouples were located inside the 4 mm tube: one at the top, middle and bottom of the catalyst bed. The feed gas for the evaluation was a mixture of 7.5% oxygen (O₂) and 15% methane in nitrogen. The nitrogen
15 maintained the mixture outside of the explosive envelope and it also served as an internal standard for the analysis of the product mixture by gas chromatography. The methane to synthesis gas evaluations were conducted at near atmospheric pressure and the hereinabove described testing apparatus was designed to shut off automatically when the pressure
20 exceeded about 30" of water. The chromatographic analysis was done automatically at intervals of 20-30 hours. The tables that follow do not report all of the analytical data obtained, rather they show representative data taken early, in the middle, and at the end of the evaluation.

Hydrogen formation was analyzed by gas chromatography, and
25 helium was used as the carrier gas (a thermal conductivity detector was used). Consequently, the values reported in the tables for hydrogen are \pm 10%. Additionally, the selectivities reported for hydrogen are greater than 100% because two moles of hydrogen are theoretically possible for each mole of methane converted to synthesis gas by partial oxidation using
30 molecular oxygen. Reaction temperature, flow rates, space velocity, residence time were as reported in the tables for each run.

Tables 1-8 show the results for the preparation of synthesis gas by the oxidation of methane using the catalysts of this invention. Specifically, Tables 1 and 2 show results using a catalyst derived from a hydrotalcite-like
35 compound having formula: $\text{NiMg}_5\text{Al}_2(\text{OH})_{16}\text{CO}_3$ and prepared according to Example 2. Table 3 shows the results using a catalyst derived from a hydrotalcite-like compound having formula: $\text{NiMg}_3\text{Al}_2(\text{OH})_{12}\text{CO}_3$ and

prepared according to Example 4. Table 4 shows the results using a catalyst derived from a hydrotalcite-like compound having formula: $\text{Ni}_2\text{Mg}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3$ and prepared according to Example 6. These data show that the catalysts containing nickel, magnesium and aluminum prepared from the hydrotalcite-like precursors all have excellent catalytic activity for the conversion of methane to synthesis gas by partial oxidation did not coke during the entire period tested.

Tables 5-7 show data for the preparation of synthesis gas using catalysts derived from $\text{Ni}_4\text{Al}_2(\text{OH})_{12}\text{CO}_3$; $\text{Ni}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3$; and $\text{Ni}_8\text{Al}_2(\text{OH})_{20}\text{CO}_3$ compounds prepared according to Examples 8, 10 and 12, respectively. These data show that the catalyst derived from the $\text{Ni}_4\text{Al}_2(\text{OH})_{12}\text{CO}_3$ hydrotalcite-like precursor is an excellent catalyst for preparing syngas by the partial oxidation of methane. The other two catalysts, which were also active, did not maintain their activity as the other catalysts derived from hydrotalcite-like compounds. Table 8 shows data for a catalyst prepared in Example 14 from a $\text{Cu}_2\text{Ni}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3$ hydrotalcite-like compound. This catalyst is also an excellent catalyst for the preparation of synthesis gas from methane and oxygen.

Tables 9-12 shows data for the conversion of methane to synthesis gas using other nickel containing materials. Table 9 shows data for the catalyst described in Example 15, a spinel. While synthesis gas production was initially excellent, the spinel catalyst deactivated after 16 hours of use. Table 10 shows the data for a $\text{NiO}/\text{Al}_2\text{O}_3$ catalyst prepared according to Example 16. This catalyst gave poor conversion of methane to synthesis gas compared to the catalysts of this invention. Table 11 shows the data for a commercially available Ni on alumina catalyst (Example 17). While syngas production was initially excellent, deactivation occurred after only 55 hours on stream. Table 12 shows the data for another commercial nickel-containing catalyst that has been used for steam reforming of hydrocarbons. When used as a catalyst for the partial oxidation of methane, it initially demonstrated excellent conversion to synthesis gas, however, it deactivated rapidly after 26 hours of use.

Table 13 shows data for the preparation of synthesis gas using a catalyst derived from a hydrotalcite-like compound having formula $\text{Mg}_4\text{Al}_2(\text{OH})_{12}\text{CO}_3$ and prepared according to Example 20. These data demonstrate that the catalyst prepared from a hydrotalcite-like composition containing magnesium and aluminum but no nickel is not as selective a

catalyst for preparing synthesis gas by the partial oxidation of methane as the catalysts derived from hydrotalcite-like compounds that do contain nickel.

Table 1

5 Partial Oxidation of Methane Using Catalyst Derived from
NiMg₅Al₂(OH)₁₆CO₃

<u>HOURS ON STREAM</u>	6:25	55:17	202:06	275:25
<u>Conditions^a</u>				
Temp.°C	752.1	750.1	749.9	750.0
<u>Conversions:</u>				
CH ₄ , mol % ^b	94.88	94.09	95.00	94.90
O ₂	99.74	99.76	99.73	99.73
<u>Selectivities, mol %</u>				
H ₂	169.61	169.21	172.03	166.54
CO	97.40	97.55	96.95	96.65
CO ₂	2.60	2.45	3.05	3.35
H ₂ /CO	1.74	1.74	1.77	1.72

^a Catalyst volume = 4.0 ml. Feed gas flow rate = 101.6 ml./min., Space velocity = 1.52×10^3 hr⁻¹, Weight hourly space velocity = 2.39×10^3 ml.g./hr., Residence time = 0.252 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 2

Partial Oxidation of Methane Using Catalyst Derived from
NiMg₅Al₂(OH)₁₆CO₃

<u>Hours on Stream</u>	6:24	177:22	275:07	348:3
<u>Conditions^a</u>				
Temp.°C	750	750	750	750
<u>Conversions:</u>				
CH ₄ , mol % ^b	94.99	93.49	93.56	94.9
O ₂	100.00	100.00	100.00	100.00
<u>Selectivities, mol %</u>				
H ₂	164.27	169.60	164.59	167.62
CO	96.72	98.29	97.41	97.08
CO ₂	3.28	1.71	2.59	2.92
H ₂ /CO	1.70	1.72	1.69	1.70

5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 101.6 ml./min., Space velocity = 1.52×10^3 hr⁻¹, Weight hourly space velocity = 2.39×10^3 ml.g./hr., Residence time = 0.252 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 3

Partial Oxidation of Methane Using Catalyst Derived from
NiMg₃Al₂(OH)₁₂CO₃

<u>HOURS ON STREAM</u>	15:24	137:31	235:14	333:04
<u>Conditions^a</u>				
Temp.°C	750	750	750	750
<u>Conversions:</u>				
CH ₄ , mol % ^b	95.88	94.51	94.47	95.74
O ₂	99.73	100.00	100.00	100.00
<u>Selectivities, mol %</u>				
H ₂	163.98	170.25	169.22	165.66
CO	97.27	97.91	97.79	97.44
CO ₂	2.73	2.09	2.21	2.50
H ₂ /CO	1.69	1.74	1.73	1.61

5 ^a Catalyst volume = 3.5 ml. Feed gas flow rate = 102.1 ml./min., Space velocity = $1.75 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $6.96 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.220 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 4

Partial Oxidation of Methane Using Catalyst Derived from
 $\text{Ni}_2\text{Mg}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3$

<u>HOURS ON STREAM</u>	6:28	24.48	220.27	251:01
<u>Conditions^a</u>				
Temp.°C	800.0	800.0	800.0	800.1
<u>Conversions:</u>				
CH ₄ , mol % ^b	97.56	97.46	97.54	97.53
O ₂	100.00	100.00	100.00	100.00
<u>Selectivities, mol %</u>				
H ₂	162.44	160.15	164.30	162.00
CO	98.96	99.02	99.17	99.02
CO ₂	1.04	0.98	0.83	0.98
H ₂ /CO	1.64	1.62	1.66	1.64

- 5 ^a Catalyst volume = 3.0 ml. Feed gas flow rate = 100.6 ml./min., Space velocity = $2.01 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $3.80 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.182 sec.
- ^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 5

Partial Oxidation of Methane Using Catalyst Derived from
 $\text{Ni}_4\text{Al}_2(\text{OH})_{12}\text{CO}_3$

<u>HOURS ON STREAM</u>	19:53	68:47	215:35	264:28
<u>Conditions^a</u>				
Temp. °C	751.0	748.9	752.3	747.5
<u>Conversions:</u>				
CH ₄ , mol % ^b	94.64	94.37	95.59	95.57
O ₂	99.67	99.64	99.68	99.71
<u>Selectivities, mol %</u>				
H ₂	172.17	168.44	165.90	162.33
CO	97.53	97.73	97.02	97.08
CO ₂	2.47	2.27	2.98	2.92
H ₂ /CO	1.77	1.73	1.71	1.67

5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 102 ± 0.4 ml./min., Space velocity = 1.53×10^3 hr⁻¹, Weight hourly space velocity = 3.06×10^3 ml.g./hr., Residence time = 0.252 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 6

Partial Oxidation of Methane Using Catalyst
Derived from $\text{Ni}_6\text{Al}_2(\text{OH})_{16}\text{CO}_3$

<u>HOURS ON STREAM</u>	10:54	59:44	84:10	108:37 ^c
<u>Conditions^a</u>				
Temp.°C	750	750	750	750
<u>Conversions:</u>				
CH ₄ , mol % ^b	95.33	95.26	94.56	-
O ₂	100.00	100.00	100.00	-
<u>Selectivities, mol %</u>				
H ₂	161.52	163.76	170.05	-
CO	96.89	97.19	97.86	-
CO ₂	3.11	2.81	2.14	-
H ₂ /CO	1.67	1.68	1.74	-

- 5 ^a Catalyst volume = 3.5 ml. Feed gas flow rate = 101.1 ml./min., Space velocity = $1.73 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $2.33 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.22 sec.
- ^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.
- 10 ^c The reactor shut down due to excessive pressure drop caused by coking of catalyst.

Table 7

Partial Oxidation of Methane Using Catalyst
Derived from $\text{Ni}_8\text{Al}_2(\text{OH})_{20}\text{CO}_3$

<u>HOURS ON STREAM</u>	1:54	99:37	148:26	172:50 ^c
<u>Conditions^a</u>				
Temp.°C	750.1	749.9	750	750
<u>Conversions</u>				
CH ₄ , mol % ^b	95.70	94.26	94.46	-
O ₂	99.75	100.00	100.00	-
<u>Selectivities, mol %</u>				
H ₂	163.57	169.38	172.23	-
CO	97.19	98.15	97.45	-
CO ₂	2.81	1.85	2.55	-
H ₂ /CO	1.68	1.73	1.77	-

- 5 ^a Catalyst volume = 3.5 ml. Feed gas flow rate = 100.8 ml./min., Space velocity = $1.73 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $3.18 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.222 sec.
- ^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.
- 10 ^c The reactor shut down due to excessive pressure drop caused by coking of catalyst.

Table 8

Partial Oxidation of Methane Using Catalyst
Derived from $\text{Cu}_2\text{Ni}_2\text{Al}_2(\text{OH})_{12}\text{CO}_3$

<u>HOURS ON STREAM</u>	10:54	59:40	132:47	157:10
<u>Conditions^a</u>				
Temp.°C	750	750	750	750
<u>Conversions</u>				
CH ₄ , mol % ^b	95.12	95.42	95.61	95.56
O ₂	100.00	100.00	100.00	100.00
<u>Selectivities, mol %</u>				
H ₂	172.42	172.45	169.72	165.16
CO	97.44	97.52	98.23	98.59
CO ₂	2.56	2.48	1.77	1.41
H ₂ /CO	1.77	1.77	1.73	1.67

- 5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 101.9 ml./min., Space velocity = $1.52 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $1.65 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.254 sec.
- ^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 9

Partial Oxidation of Methane Using $\text{Ni}_2\text{Al}_2\text{O}_5$
(Catalyst Derived from a NiAl Double Hydroxide)

<u>HOURS ON STREAM</u>	15.23	88.31	161.39	186.00 ^c
<u>Conditions^a</u>				
Temp.°C	750	750	750	750
<u>Conversions</u>				
CH ₄ , mol % ^b	95.33	95.59	95.82	-
O ₂	100.00	100.00	100.00	-
<u>Selectivities, mol %</u>				
H ₂	160.83	164.66	155.01	-
CO	97.20	97.35	97.08	-
CO ₂	2.80	2.65	2.92	-
H ₂ /CO	1.65	1.69	1.60	-

5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 101.6 ml./min., Space velocity = $1.52 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $1.65 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.252 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

10 ^c The reactor shut down due to excessive pressure drop caused by coking of catalyst.

Table 10**Partial Oxidation of Methane Using NiO/Al₂O₃**

<u>HOURS ON STREAM</u>	117:22	141:45	190:31
<u>Conditions^a</u>			
Temp. °C	752.7	751.3	751.0
<u>Conversions:</u>			
CH ₄ , mol % ^b	53.87	58.82	58.47
O ₂	100.00	100.00	100.00
<u>Selectivities, mol %</u>			
H ₂	105.27	126.23	124.23
CO	77.84	82.35	86.56
CO ₂	22.16	17.65	13.44
H ₂ /CO	1.35	1.53	1.43

5 ^a Catalyst volume = 2.0 ml. Feed gas flow rate = 101.6 ml./min., Space velocity = $3.05 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $2.34 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.126 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

Table 11

Partial Oxidation of Methane Using A Commercial
Nickel-Containing Catalyst

<u>HOURS ON STREAM</u>	6:26	30:48	55:11	79:34 ^c
<u>Conditions^a</u>				
Temp.°C	748.9	749.3	749.3	-
<u>Conversions:</u>				
CH ₄ , mol % ^b	95.67	95.51	95.56	-
O ₂	100.00	99.70	99.45	-
<u>Selectivities, mol %</u>				
H ₂	172.26	170.79	174.03	-
CO	96.48	96.52	96.73	-
CO ₂	3.52	3.48	3.27	-
H ₂ /CO	1.78	1.77	1.80	-

5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 101.1 ml./min., Space velocity = 1.52×10^3 hr⁻¹, Weight hourly space velocity = 1.77×10^3 ml.g./hr., Residence time = 0.254 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

10 ^c Reactor shut down due to excessive pressure drop caused by coking of catalyst.

Table 12

Partial Oxidation of Methane Using A Commercial
Nickel-Containing Catalyst

<u>HOURS ON STREAM</u>	1:55	26:20	50:47 ^c
<u>Conditions^a</u>			
Temp.°C	750.0	750.0	26.3
<u>Conversions</u>			
CH ₄ , mol % ^b	94.95	94.97	-
O ₂	99.76	99.76	-
<u>Selectivities, mol %</u>			
H ₂	171.70	172.65	-
CO	97.39	97.38	-
CO ₂	2.61	2.62	-
H ₂ /CO	1.76	1.77	-

5 ^a Catalyst volume = 4.0 ml. Feed gas flow rate = 100.6 ml./min., Space velocity = $1.51 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $1.28 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.255 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

10 ^c Reactor shut down due to catalyst plugging.

Table 13

Partial Oxidation of Methane Catalyst
Derived From $\text{Mg}_4\text{Al}_2(\text{OH})_{12}\text{CO}_3$

<u>HOURS ON STREAM</u>	1:57	148:12
<u>Conditions^a</u>		
Temp. °C	750.1	749.9
<u>Conversions:</u>		
CH ₄ , mol % ^b	33.25	33.08
O ₂	97.07	99.56
<u>Selectivities, mol %</u>		
H ₂	57.50	32.85
CO	25.61	30.69
CO ₂	69.96	57.46
H ₂ /CO		

- 5 ^a Catalyzed volume = 4.0 ml. Feed gas flow rate = 100.6 ml./min., Space velocity = $1.51 \times 10^3 \text{ hr}^{-1}$, Weight hourly space velocity = $3.18 \times 10^3 \text{ ml.g./hr.}$, Residence time = 0.255 sec.

^b Conversion based on the difference between the amount of methane added to the reactor and the amount of methane recovered.

10 Example 22

A ruthenium-on-titania catalyst (0.1% by weight ruthenium) was evaluated for the formation of synthesis gas using the apparatus, feed materials, and analysis methods described in Example 21. The reaction temperature was 750°C, catalyst volume was 4.0 ml, feed gas flow rate was 102.1 ml./min., space velocity was $1.53 \times 10^3 \text{ hr}^{-1}$, weight hourly space velocity was $1.83 \times 10^3 \text{ ml.g./hr.}$, and the residence time was 0.251 sec.

After 284.25 hours of operations, methane conversion was 53.11% and O₂ conversion was 99.78%.

The selectivities for the products were as follows:

Selectivity, Mole %	
H ₂	109.40
CO	59.09
CO ₂	40.91
H ₂ /CO	1.85

Thus, while the ruthenium-based catalyst did not coke in the period tested, the catalysts of this invention demonstrated superior conversions of methane and selectivity to synthesis gas.

5 Example 23

A ruthenium-on-titania catalyst (0.5% by weight ruthenium) was evaluated for the formation of synthesis gas as in Example 22. The reaction temperature was 750.8°C, catalyst volume was 4.0 ml, feed gas flow rate was 101.6 ml/min., space velocity was $1.52 \times 10^3 \text{ hr}^{-1}$, weight hourly space
10 velocity was $1.76 \times 10^3 \text{ ml.g./hr.}$, residence time was 0.252 sec.

After 279:55 hours of operation, methane conversion was 71.53% and O₂ conversion was 99.75%. The selectivity for the products were as follows:

Selectivity, Mole %	
H ₂	140.93
CO	80.65
CO ₂	19.35
H ₂ /CO	1.75

As in Example 22, this ruthenium based catalyst did not coke during
15 the time period tested, however, the catalysts of this invention are superior for the formation of synthesis gas by the oxidation of methane.

Procedure for Examples 24 -30

The catalyst of this invention, other nickel-containing catalysts, and a molybdenum-based catalyst were evaluated for the conversion of methane
20 to synthesis gas using carbon dioxide as the source of oxygen atoms. These evaluations were conducted using a fixed-bed, single-pass reactor consisting of a 9mm x 11mm x 30 inch quartz tube with indentations located 4 inches from the bottom of the tube. The reactor was operated in a downflow mode and a three-zone furnace was used to maintain isothermal
25 conditions. Steam and condensable hydrocarbon products were collected in

a cold trap. Exit gas flow rates were measured by a wet test meter. Hydrogen sulfide, if present, was removed from the product stream using a wet scrubber. Analysis were performed by gas chromatography.

- For the following evaluations using carbon dioxide, unless otherwise noted, the reaction temperature was 816°C, the volumetric space velocity was 7200 hr⁻¹ at STP, pressure was 300 psig, the ratio of carbon dioxide to methane in the feed gas was 1.25, and the ratio of water to methane was 1.0. If used, hydrogen sulfide was at 27 ppm (by volume) in the feed gas. Using these ratios of feed gas components, the feed gas for the carbon dioxide reforming reactions was as follows:

	Vol. %
CO ₂	38.4
CH ₄	30.8
H ₂ O	30.8
H ₂ S	27 ppm

Example 24

- The hydrotalcite-derived catalyst prepared according to Example 8, sieved to 80-100 mesh, was evaluated for the carbon dioxide reforming of methane. A low concentration of hydrogen sulfide (H₂S) was in the feed. The results are reported in Table 14, and these data show that this catalyst is an effective catalyst for reforming using carbon dioxide. The methane and carbon dioxide conversions were 76% and 41%, respectively. Selectivity of the carbon to carbon monoxide was 99.5%.

Example 25

- Table 14 shows the results for the reforming of methane using carbon dioxide in the presence of commercial nickel-containing reforming catalyst. The results are similar to that of Example 24, however, the conversion of carbon dioxide was lower.

Example 26

- Table 14 shows the results for the reforming of methane using carbon dioxide in the presence of a molybdenum sulfide catalyst using the same conditions and feed materials used for Examples 24 and 25. Conversion of methane and carbon dioxide were significantly lower compared to Examples 24 and 25.

Example 27

The nickel catalyst of this invention prepared from Example 8 was tested under the same conditions used in Examples 24-26, however, the hydrogen sulfide was not included in the feed gases. The data from this run is also shown in Table 14. Conversion of methane and carbon dioxide were high at 77% and 40%, respectively. Carbon selectivity to carbon monoxide was 99.5%

The water to methane ratio was decreased to 0.5 to evaluate the effect of reduced water concentration in feed gas. The temperature of the reaction was then increased to 867°C. The data from these runs are shown in Table 15.

The reduced water resulted in an increase in carbon dioxide conversion from 40% to 52%, and a decrease in the ratio of hydrogen to carbon monoxide in the syngas product. The higher reaction temperature increased the methane and carbon dioxide conversion to 82% and 60%, respectively. Therefore, low water to methane ratios and higher reaction temperature maximize carbon dioxide conversion.

Example 28

The commercial nickel containing catalyst was also evaluated using lower ratios of water to methane and higher reaction temperatures. These data are also in Table 15.

Example 29

The reforming of methane using carbon dioxide was evaluated using a physical mixture of nickel oxide on alpha alumina. The catalyst composition contained 75 weight percent NiO. The same reaction conditions were used as in Examples 24-26 except no hydrogen sulfide was added to the feed gas mixture. The data, which are presented in Table 14, shows that the conversion of methane and carbon dioxide were only 30% and 11%, respectively.

Example 30

The nickel spinel prepared according to the method of Example 16 was evaluated as a reforming catalyst for the formation of synthesis gas by the reaction of carbon dioxide with methane. The reaction conditions used were the same as those used in Examples 24-26 except there was no hydrogen sulfide in the feed gas. The data in Table 14 shows that the spinel, after 100 hours of operation, is an effective catalyst for reforming

methane using carbon dioxide. The methane and carbon dioxide conversion were 86% and 47%, respectively. Selectivity of the carbon to carbon monoxide was 99.5%.

Table 14

5

Ex. #	Hours	H ₂ S ^a	ANALYSIS, VOL. %					CONV., %		SEL.
			H ₂	CO	CH ₄	CO ₂	H ₂ /CO	CH ₄	CO ₂	CO
24	170	Y	43.1	31.8	6.4	18.5	1.36	76	41	99.5
25	120	Y	41.2	31.4	6.5	20.8	1.31	76	38	99.5
26	120	Y	30.1	22.8	18.4	28.4	1.32	47	26	99.0
27	150	N	42.4	32.0	6.2	19.2	1.30	77	40	99.5
28	150	N	42.6	32.9	6.0	18.4	1.30	77	42	99.5
29	4	N	24.8	13.6	24.2	37.1	1.80	30	11	99.0
30	100	N	44.4	35.2	3.6	15.9	1.30	86	47	99.5

^a Y = H₂S was present; N = H₂S not present.

Table 15

CATALYST	FEED GAS RATIOS ^a		CONVERSION, %		
	Temp. °C	H ₂ O/CH ₄	CH ₄	CO ₂	H ₂ /CO
Example 8	815	1.0	77	40	1.3
	815	0.5	70	52	1.0
	867	0.5	82	60	1.0
Commercial Ni Cat.	815	1.0	77	42	1.3
	815	0.5	71	53	1.0
	860	0.5	83	61	1.0
	860	0.25	79	68	0.8

^a Pressure was 300 psig, no hydrogen sulfide in feeds. Ratio of carbon dioxide to methane was 1.25.

10

Example 31

The catalyst of this invention prepared from the nickel-containing hydrotalcite-like composition [Ni₄Al₂(OH)₁₂]CO₃·4H₂O was compared to a commercial nickel-containing reforming catalyst for the reaction of methane with carbon dioxide. In this comparison, the gas hourly volumetric space velocity (GHSV) of the feed gas was varied and, as shown in Table 16, the

15

catalyst of this invention was substantially more active in that conversions of methane at the high gas flow rates were considerably greater for the catalyst derived from the hydrotalcite-like catalyst precursor than for the commercial catalyst.

- 5 In this evaluation, the catalyst (0.02 cc) was diluted with 50 parts by weight of alpha alumina per part of catalyst. Additionally, the catalyst bed was preceded by a 1 inch bed of alumina and followed by a 0.25 inch bed of alumina. The ratio of carbon dioxide to methane in the feed was 1.2, the ratio of water to methane was 1.0, and the feed gas was 50% diluted with
10 nitrogen. The reaction pressure was 100 psig, and the reaction temperature was as shown in Table 16.

Table 16

CONVERSION OF METHANE (%)						
GHSV	Catalyst from [Ni ₄ Al ₂ (OH) ₁₂]CO ₃			Commercial Catalyst		
	800°C	750°C	700°C	800°C	750°C	700°C
1.8 x 10 ⁵		80.1	65.0	90.2	79.7	61.1
3.6 x 10 ⁵	91.0	80.1	63.8	86.8	77.1	48.5
5.4 x 10 ⁵		79.3		81.7	70.1	31.3
7.2 x 10 ⁵	89.7	78.9	59.0	76.1	63.4	
9.0 x 10 ⁵		77.9		71.8	55.6	
10.8 x 10 ⁵	86.8	76.0	56.4	65.7	49.9	
12.6 x 10 ⁵		73.4				

Example 32

- 15 Methane was stream-reformed to synthesis gas using the catalyst prepared according to Example 8 hereinabove. The same reactor was used as described hereinabove for Examples 24-30. The reactor was loaded with 0.33 grams (0.5 cc) of the catalyst (40-60 mesh size) and the catalyst bed was pretreated for 18 hours at 850°C with a feed of water, hydrogen and
20 nitrogen at a flow rate of 28,800 (volume gas/volume catalyst/hour at STP). The volumetric ratio of water, hydrogen gas and nitrogen gas was 109.1:10.9:120, respectively. After this pretreatment, the feed gas was changed to a 50/50 mole ratio of methane and water at a total gas flow rate of 120 sccm. After operating at these conditions, the composition of the gas
25 exiting the reactor on a dry basis was as follows:

<u>COMPONENT</u>	<u>MOLE %</u>
Methane	6.6
Carbon monoxide	22.2
Hydrogen gas	69.1
Carbon dioxide	2.1
<u>H₂/CO mole ratio</u>	<u>3.1</u>


This example demonstrates that the catalyst of this invention is effective for the steam reforming of methane using low ratios of water (steam) to methane. Using this low ratio, a low molar ratio (i.e., 3:1) of hydrogen-to-carbon monoxide in the synthesis gas product was formed. During this evaluation, there was no evidence of coke formation.

The entire specification of U.S. Patent Application Serial No. 07/993,419, filed December 21, 1992; is hereby specifically incorporated by reference.

Certain embodiments of the present invention have been set forth in the preceding description of the invention. However, alternate embodiments and various modifications will be apparent to those skilled in the art. These alternatives and modifications are considered to be equivalent and within the spirit and scope of the present invention.


Having described the invention, that which is claimed is:

1. A method for preparing synthesis gas comprising feeding a gaseous or vaporizable hydrocarbyl compound and an oxygen-containing gas comprising molecular oxygen, carbon dioxide, water or any mixture thereof to a suitable reaction zone containing a catalyst formed by heat treating a nickel containing hydrotalcite-like compound, and reacting the hydrocarbyl compound and the oxygen-containing gas in the presence of the catalyst at a temperature and pressure sufficient to form synthesis gas.
2. The method of Claim 1 wherein the oxygen-containing gas comprises molecular oxygen.
3. The method of Claim 1 wherein the oxygen-containing gas comprises carbon dioxide.
4. The method of Claim 1 wherein the hydrocarbyl compound comprises methane.
5. A catalyst suitable for the reforming of a hydrocarbyl compound to prepare synthesis gas comprising the composition formed by heat treating to a temperature of greater than about 700°C, a catalyst precursor composition comprising at least one hydrotalcite-like compound having the formula:



wherein M^{2+} is a metal ion having a valence of 2+ and is at least Ni^{2+} ; M^{3+} is a metal ion having a valence of 3+; x is a number of about 0.10 to about 0.50; A^{n-} is an anion having a negative charge of n; and m is 0 or a positive number.

6. The catalyst of Claim 5 wherein said heat treating comprises contacting the catalyst precursor composition with the reactants and under the reaction conditions used for the preparation of synthesis gas by the reaction of a hydrocarbyl compound with a gas comprising molecular oxygen, carbon dioxide or water.
7. The catalyst of Claim 5 wherein M^{3+} is Al^{3+} .
8. The catalyst of Claim 5 wherein M^{2+} is a mixture of Ni^{2+} and Mg^{2+} and wherein M^{3+} is Al^{3+} .
9. The catalyst of Claim 8 wherein x is about 0.25 to about 0.45.
10. The catalyst of Claim 9 wherein A is carbonate.
11. A hydrotalcite-like compound having formula:



wherein M^{2+} is a metal ion having a valence of 2+ and is at least a mixture of Ni^{2+} and Mg^{2+} ; M^{3+} is at least one metal ion having a valence of 3+ and is at least Al^{3+} ; x is a number greater than about 0.25 to about 0.50; A^{n-} is an anion having a negative charge n; and m is 0 or a positive number.

5 12. The hydrotalcite-like compound of Claim 11 wherein M^{2+} is a mixture of Ni^{2+} and Mg^{2+} and wherein M^{3+} is Al^{3+} .

13. A catalyst composition comprising a hybrid phase component wherein a $M^{2+}O$ component and a $M^{2+}Al_2O_4$ spinel component are in a crystallite and wherein the $M^{2+}O$ component and the $M^{2+}Al_2O_4$ spinel component are joined within the crystallite through an epitaxial interface, and where M^{2+} is a metal ion having a valence of 2+ and comprises Ni^{2+} .

14. The catalyst composition of Claim 13 wherein M^{2+} is Ni^{2+} or a mixture of Ni^{2+} and Mg^{2+} .

15. A hydrotalcite-like compound having formula:


$$15 \quad [M^{2+}_{(1-x)}M^{3+}_x(OH)_2]^{x+n}A_{x/n}^{n-} \cdot mH_2O,$$

wherein M^{2+} is at least a mixture of Ni^{2+} and Cu^{2+} , M^{3+} is at least Al^{3+} , x is about 0.1 to about 0.5, A is an anion with negative charge n, and m is 0 or a positive number.

16. A reforming catalyst comprising metal particles of about 1 to about 1000 nanometers in size and comprising at least nickel in the zero oxidation state, the external surface area of the metal particles being mostly surrounded by spinel crystallites, the spinel crystallites comprising $M_2^{3+}O_3$ or $M^{2+}M_2^{3+}O_4$ or a mixture thereof where M^{2+} is a metal in the 2+ oxidation state, and M^{3+} is a metal in the 3+ oxidation state.


1/3

FIG. 1

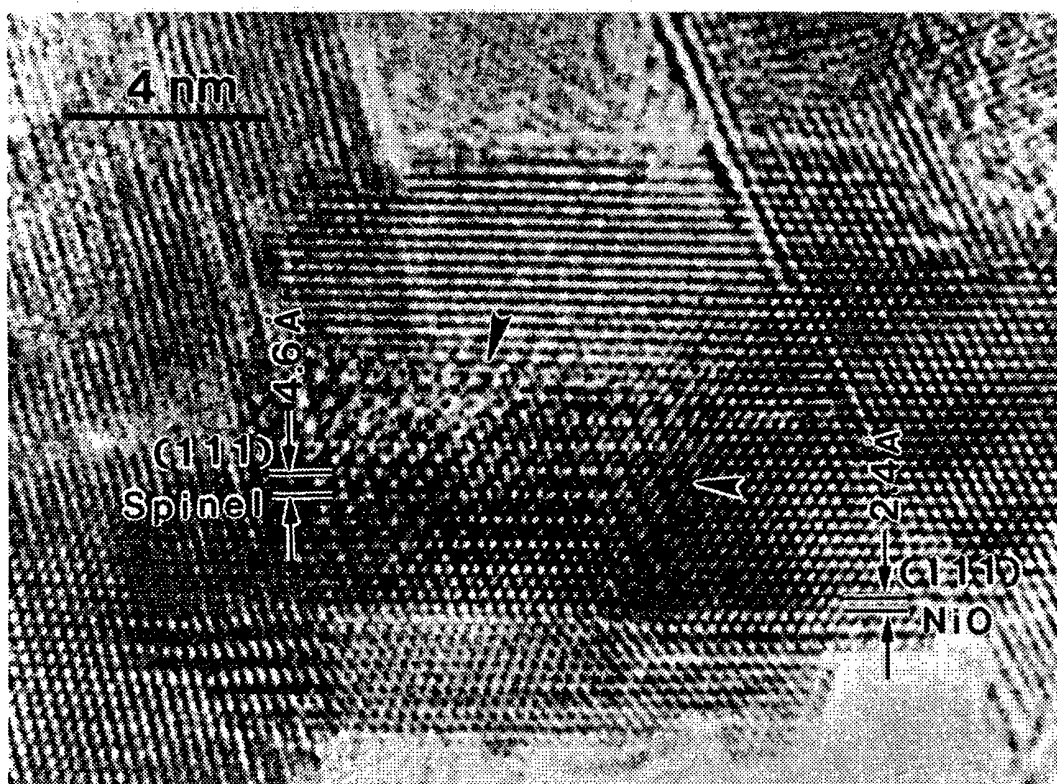


2/3

FIG. 2

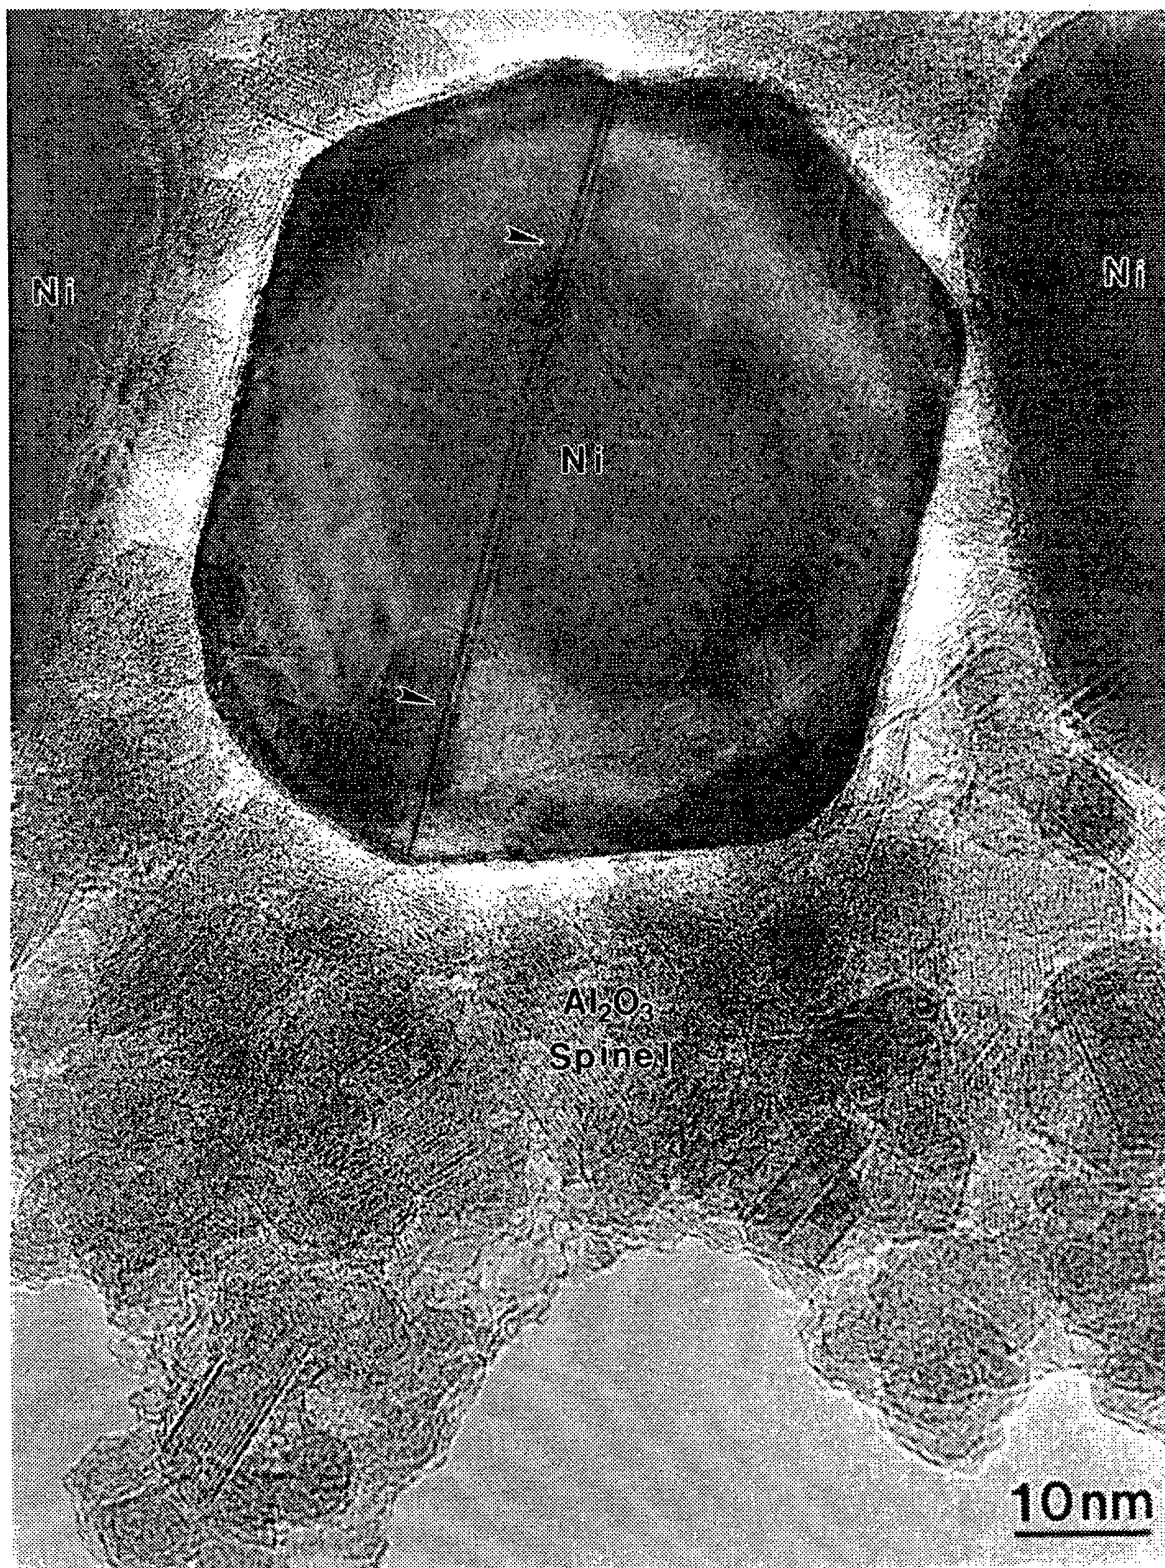

3/3

FIG. 3

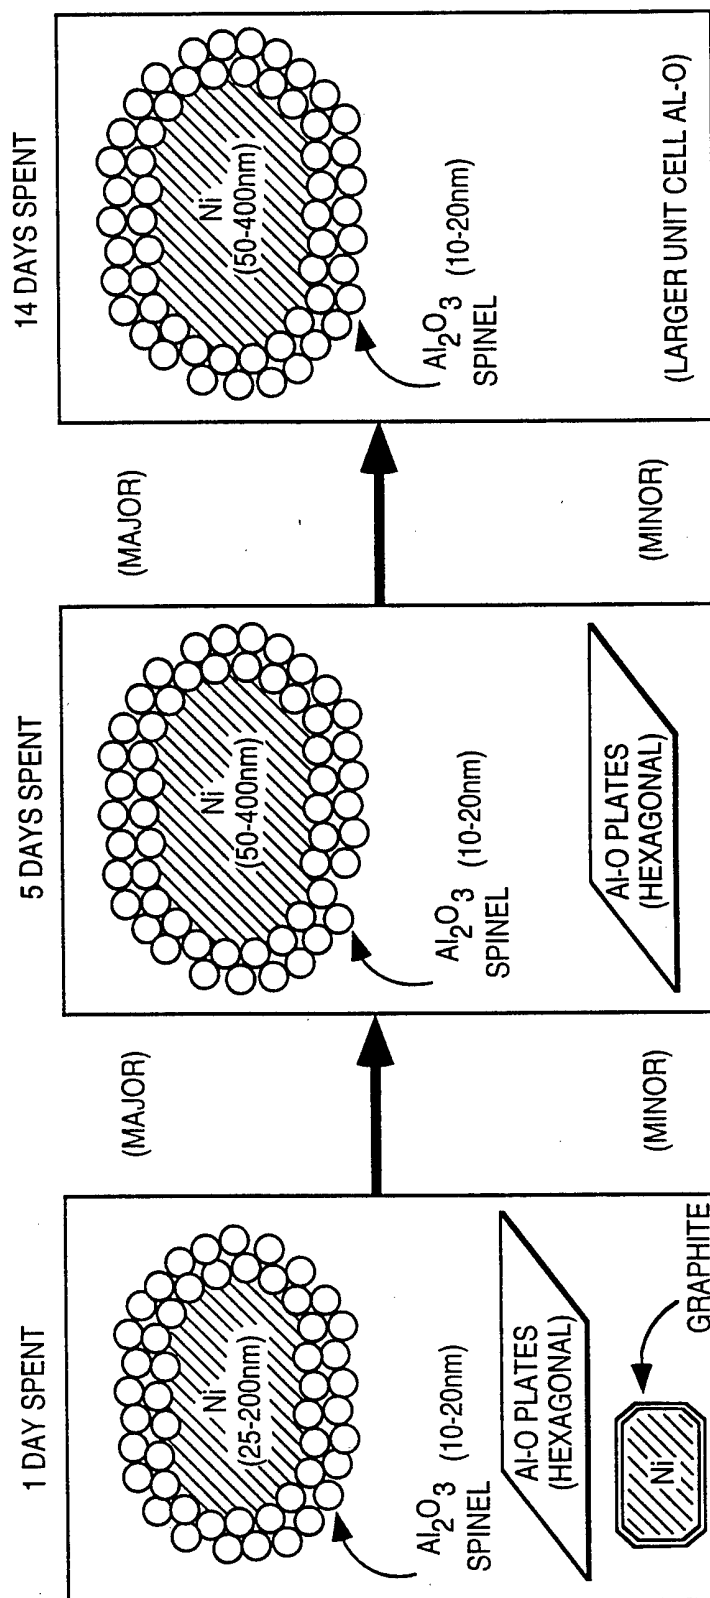

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 93/12286

A. CLASSIFICATION OF SUBJECT MATTER

IPC 5 C01B3/40 B01J23/00 B01J23/74 C01G53/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 5 C01B B01J C01G C01F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JOURNAL OF CATALYSIS vol. 133 , 1992 , DULUTH, MN US pages 231 - 246 O.CLAUSE ET AL. 'Preparation and characterization of Nickel-Aluminum mixed oxides obtained by thermal decomposition of hydrotalcite-type precursors' cited in the application see page 231 - page 236	1,5,7, 13,14,16
Y	IDEM	1,2,4
A	IDEM	8-12,15
Y	NITROGEN no. 187 , September 1990 , LONDON GB pages 28 - 29 'Partial oxidation of methane to synthesis gas' see the whole document	1,2,4
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 1994

Date of mailing of the international search report

28. 04. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Van der Poel, W

INTERNATIONAL SEARCH REPORT

Intern. Patent Application No

PCT/US 93/12286

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,3 932 534 (Y. FUKUNAGA ET AL.) 13 January 1976 see table 1 see column 4, line 35 - column 9, line 50 see column 12, line 40 - line 65	5-14,16
A	IDEM ---	15
X	US,A,3 865 753 (F.J. BROECKER ET AL.) 11 February 1975 cited in the application see column 2, line 38 - line 47 see column 4, line 28 - line 67 see column 5, line 35 - column 6, line 22 see examples 1,2,5	11,12
A	IDEM ---	5-10, 13-16
X	DE,A,24 61 482 (BASF AG) 8 July 1976 see page 3, paragraph 4 - page 4, paragraph 2 see examples 1-4	11,12
A	IDEM ---	5-10, 13-16
A	GB,A,2 188 251 (UNITED KINGDOM ATOMIC ENERGY AUTHORITY) 30 September 1987 see example 1 ---	1,5,6, 13,16
A	JOURNAL OF CATALYSIS vol. 52 , 1978 , NEW YORK pages 280 - 290 J.R.H.ROSS ET AL. 'Evidence of the participation of surface nickel aluminate sites in the steam reforming of methane over nickel/alumina catalysts' cited in the application see the whole document -----	1,4-7, 10-14,16

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Appl. No.

PCT/US 93/12286

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3932534	13-01-76	JP-C- 1057872	31-07-81
		JP-A- 50004001	16-01-75
		JP-B- 55050704	19-12-80

US-A-3865753	11-02-75	DE-A- 2231367	10-01-74
		AT-B- 332358	27-09-76
		BE-A- 801538	27-12-73
		CA-A- 1012768	28-06-77
		FR-A,B 2190523	01-02-74
		GB-A- 1442172	07-07-76
		JP-A- 50105586	20-08-75
		NL-A- 7308961	02-01-74
		SE-B- 392609	04-04-77

DE-A-2461482	08-07-76	AT-B- 343086	10-05-78

GB-A-2188251	30-09-87	NONE	
