




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C10G 2/00, B01J 8/22	A1	(11) International Publication Number: WO 98/50486 (43) International Publication Date: 12 November 1998 (12.11.98)
<p>(21) International Application Number: PCT/US98/08686</p> <p>(22) International Filing Date: 29 April 1998 (29.04.98)</p> <p>(30) Priority Data: 08/850,566 2 May 1997 (02.05.97) US</p> <p>(71) Applicant: EXXON RESEARCH AND ENGINEERING COMPANY [US/US]; 180 Park Avenue, P.O. Box 390, Florham Park, NJ 07932-0390 (US).</p> <p>(72) Inventors: BEHRMANN, William, C.; 546 Baird Drive, Baton Rouge, LA 70808 (US). LEVINNESS, Stephen, C.; 1850 Cloverdale Avenue, Baton Rouge, LA 70808 (US).</p> <p>(74) Agents: SIMON, Jay et al.; Exxon Research and Engineering Company, P.O. Box 390, Florham Park, NJ 07932-0390 (US).</p>		<p>(81) Designated States: AU, BR, CA, JP, NO, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: HYDROCARBON SYNTHESIS CATALYST SLURRY REJUVENATION WITH GAS DISENGAGEMENT

(57) Abstract

A reversibly deactivated, particulate catalyst in a slurry hydrocarbon synthesis slurry is rejuvenated by circulating the slurry from a slurry body through (i) a gas disengaging zone to remove gas bubbles from the slurry, (ii) a catalyst rejuvenation zone in which a catalyst rejuvenating gas contacts the catalyst in the slurry to rejuvenate it and form a rejuvenated catalyst slurry and, (iii) back into the slurry body. Removing at least a portion of the gas bubbles improves the rejuvenation process.

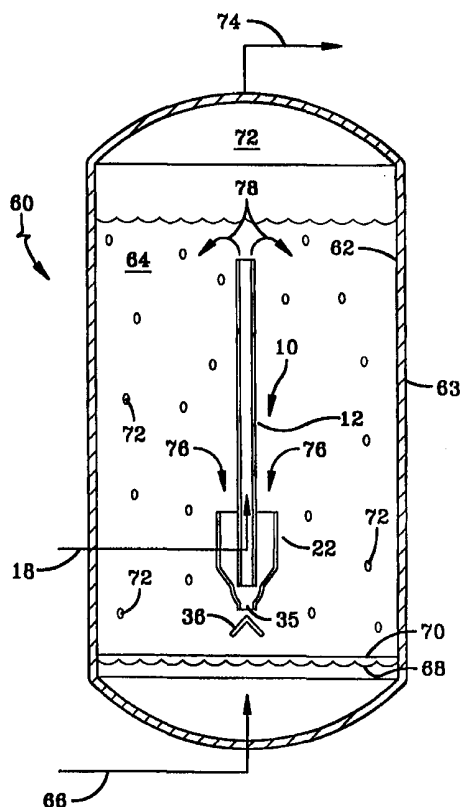

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HYDROCARBON SYNTHESIS CATALYST SLURRY REJUVENATION WITH GAS DISENGAGEMENT

BACKGROUND OF THE DISCLOSURE

Field of the Invention

The invention relates to a process and apparatus for in-situ rejuvenating solid catalyst particles suspended in a slurry. More particularly, the invention relates to a process and means for rejuvenating solid catalyst particles dispersed in a three phase, Fischer-Tropsch type hydrocarbon slurry comprising said particles, a hydrocarbon liquid phase and gas bubbles in-situ in the slurry, in which gas bubbles are removed from the slurry entering the rejuvenation zone.

Background of the Invention

Slurry hydrocarbon synthesis (HCS) processes are known. In a slurry HCS process a synthesis gas (syngas) comprising a mixture of H_2 and CO is bubbled up as a third phase through a slurry in a reactor in which the slurry liquid comprises hydrocarbon products of the synthesis reaction and the dispersed, suspended solids comprise a suitable Fischer-Tropsch type hydrocarbon synthesis catalyst. Reactors which contain such a three phase slurry are sometimes referred to as "bubble columns", as is disclosed in U.S. Patent 5,348,982. Irrespective of whether the slurry reactor is operated as a dispersed or slumped bed, the mixing conditions in the slurry will typically be somewhere between the two theoretical conditions of plug flow and back mixed. Syngas made from hydrocarbon feedstocks which contain nitrogen (i.e., natural gas) or nitrogen containing compounds (i.e., resids, coal, shale, coke, tar sands, etc.) invariably contains HCN and NH_3 which contaminate the reactive slurry and rapidly, but reversibly, deactivate the catalyst. Certain oxygenates and carbonaceous compounds

- 2 -

formed in the slurry as by-products of the HCS reaction can also cause rapid deactivation. Deactivation of such catalysts by these species is reversible and catalytic activity is restored (the catalyst rejuvenated) by contacting the deactivated catalyst with hydrogen. The activity of the HCS catalyst in the reactive slurry may be intermittently or continuously rejuvenated by contacting the slurry with hydrogen or a hydrogen containing gas to form a rejuvenated catalyst slurry as is disclosed, for example, in U.S. Patents 5,260,239 and 5,268,344. In these patents the slurry, containing gas bubbles, is rejuvenated by circulating it through either a rejuvenation tube immersed in the slurry or in an external rejuvenation reactor. It has now been found that the presence of CO hinders catalyst rejuvenation until the CO is consumed. This limits the overall efficiency of the rejuvenation process and wastes CO and H₂. It would be an improvement to the art if these gas bubbles could be removed from the slurry before it contacts the rejuvenation gas.

SUMMARY OF THE INVENTION

The present invention relates to a process and means for rejuvenating solid catalyst particles in a three phase hydrocarbon synthesis (HCS) slurry which comprises gas bubbles and catalyst particles dispersed in a slurry liquid, in which gas bubbles are removed from the slurry prior to the rejuvenation. Briefly, the process comprises passing a portion of slurry from a slurry body through a gas disengaging zone to remove gas bubbles and then through a catalyst rejuvenating zone in which the gas reduced slurry contacts a rejuvenation gas to rejuvenate the catalyst in the slurry. The rejuvenated slurry is then returned to the slurry body. This may be accomplished using a hollow rejuvenation tube, open at the top and bottom and immersed in the slurry, the bottom of which opens into an upwardly open gas disengaging cup surrounding the bottom of the tube, to provide an annular gas disengaging zone. The catalyst rejuvenation is done either continuously or intermittently, as desired, with the slurry reactor either operating and producing hydrocarbon products, or with it off-line. The

- 3 -

gas bubbles comprise unreacted synthesis gas (syngas) and gas products of the HCS reaction. The slurry liquid comprises hydrocarbon products of the HCS reaction which are liquid at the reaction conditions. Thus, the process of the invention comprises rejuvenating a particulate, reversibly deactivated HCS catalyst in a slurry comprising gas bubbles, the catalyst and a slurry liquid in which at least a portion of the catalyst particles are at least partially, reversibly deactivated, by withdrawing a portion of slurry from a slurry body and passing or circulating it through a gas disengaging zone to disengage and remove gas bubbles from the slurry to form a gas reduced slurry, passing the gas reduced slurry through a rejuvenation zone in which it contacts a catalyst rejuvenating gas to rejuvenate the catalyst and form a rejuvenated catalyst slurry, followed by returning the rejuvenated slurry back into the slurry body. In the embodiment in which the rejuvenation zone is a hollow conduit oriented primarily vertically, the rejuvenating gas is injected into the bottom of the rejuvenating zone and the process continues as long as the rejuvenation gas, which also acts as a lift gas for the slurry in the rejuvenation zone, continues to be injected into the rejuvenation zone. In a slurry HCS reactor, synthesis gas comprising a mixture of H_2 and CO is bubbled up into the bottom the reactor and forms gas bubbles which are dispersed in the slurry liquid. The presence of CO in the rejuvenation zone hinders catalyst rejuvenation until the CO is consumed. Further, the H_2 to CO ratio in the rejuvenation zone is substantially greater than the stoichiometric 2.1/1 and may be higher than 10/1. This means that instead of being converted to more desirable liquid hydrocarbon products, the CO in the rejuvenation zone is converted primarily to methane, thereby wasting valuable syngas and added hydrogen. The gas bubbles also contain gas reaction products of the HCS reaction, of which 50 % or more may be water vapor, which interferes with the catalyst rejuvenation by acting as a diluent for the rejuvenation gas. The catalyst rejuvenation is accomplished within the slurry either in the HCS reactor or reaction zone, or in an outboard or separate catalyst rejuvenation zone or reactor, as is disclosed in U.S. Patent 5,260,239. However, it is convenient to rejuvenate the catalyst within the slurry in the HCS reaction zone. When performed in the slurry in the HCS reactor, the HCS reaction is not disturbed as the gas disengaging and catalyst rejuvenation zones, while immersed

- 4 -

in the slurry, are separate from it and the rejuvenation occurs within a rejuvenation conduit or tube in the slurry. While the practice of the invention finds particular use with rejuvenating an HCS catalyst in-situ in a hydrocarbon slurry liquid, it is not intended to be limited to this particular embodiment. By reversibly deactivated catalyst is meant that the catalyst is at least partially reversibly deactivated and that the catalytic activity is at least partially restored by contacting the catalyst in the slurry with a suitable catalyst rejuvenating gas. By immersed in the slurry is meant that at least the gas disengaging zone and the bottom portion of the rejuvenation zone are immersed in the slurry body. The top of the rejuvenation zone may be out of the slurry body. The slurry body may be a reactive slurry in a slurry reaction zone, such as a three phase slurry comprising a hydrocarbon liquid in which is dispersed catalyst particles and reactive gas bubbles, as in a slurry type HCS reaction zone disclosed in the prior art, or it may be separate from a reaction zone as disclosed in the '239 patent referred to above. The term "slurry body" is used herein to refer to the slurry body from which a portion is withdrawn and passed into the rejuvenation zone or the slurry body into which the rejuvenated slurry is passed into (they may both be the same body), to distinguish it from the slurry in the rejuvenation zone and the regenerated slurry exiting the rejuvenation zone. While the catalyst rejuvenation zone is separate from the slurry body, in some embodiments all or at least a portion of it may be located within the slurry body. In the context of the invention, the term "catalyst deactivating species" is meant to include species which reversibly deactivate the catalyst and wherein the catalyst activity is restored (the catalyst rejuvenated) by contact with a rejuvenating gas in-situ in the slurry liquid. Hydrogen or a hydrogen containing gas is useful for such rejuvenation, as has been demonstrated in the prior art. Finally, while HCN, NH_3 and certain types of oxygenates and carbonaceous materials will deactivate the catalyst, the invention is not intended to be limited to use only with these species, but is useful with any species which reversibly deactivate the catalyst and wherein the catalyst activity can be restored with an appropriate rejuvenating gas.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 (a) and 1 (b) are a respective simplified schematic in partial cross-section and a top plan view illustrating a slurry gas disengaging and catalyst rejuvenating means useful in the practice of the invention.

Figure 2 is a simple schematic of a prior art rejuvenation tube.

Figure 3 schematically illustrates a slurry reactor containing a slurry in which is immersed a slurry gas disengaging and catalyst rejuvenating means of the invention.

DETAILED DESCRIPTION

In one embodiment the slurry degassing and catalyst rejuvenating means comprises a substantially vertical, hollow conduit open at the top and bottom and having means for injecting a catalyst rejuvenating gas into its interior, the bottom of which opens into a generally cup-shaped baffle which surrounds the bottom of the conduit and opens upward to provide an annular gas disengaging zone around the bottom of the conduit. Slurry containing deactivated catalyst flows down through the gas disengaging zone to disengage the gas and form a gas reduced slurry which passes up into the catalyst rejuvenating zone in which it is contacted and mixed with the upflowing catalyst rejuvenating gas which contacts the deactivated catalyst in the slurry, thereby at least partially rejuvenating the catalyst in the slurry to form a rejuvenated catalyst slurry. The rejuvenated catalyst slurry passes up and out the top of the rejuvenation zone and back into the slurry body. The terms "rejuvenating" and "rejuvenation" are used synonymously herein. The uprising rejuvenating gas is fed into the bottom of the rejuvenation conduit and acts as a lift gas to provide a net upward flow of the slurry through the conduit. This sets up a continuous flow of slurry through the gas disengaging and catalyst rejuvenating zones. This process continues as long as

- 6 -

rejuvenating gas is fed into the rejuvenating conduit. Thus, the practice of the invention rejuvenates the catalyst in the slurry in the slurry reactor itself, without the need for an outboard rejuvenating reactor as in U.S. Patent 5,260,239 and without interfering with the HCS reaction. The means employed to accomplish this is extremely simple, inexpensive, robust, has no moving parts, occupies a minimum of space in the reactor and also aids in dispersing the catalyst in the reactor and reducing catalyst maldistribution, because the slurry is preferably withdrawn near the bottom of the reactor where the catalyst concentration is greatest and returned at the top of the slurry where it is least. In a further embodiment, the gas disengaging and catalyst rejuvenating means form a single unit which terminates near the bottom of the slurry body, in which the gas disengaging means is a simple cup-shaped device, the wall of which surrounds the bottom of the conduit and is laterally spaced apart from the outer conduit surface, to form an annular flow path for the slurry to flow through and disengage gas, before entering the rejuvenating means, which may simply be a metal tube or pipe into which a catalyst rejuvenating gas is injected at a point or points, and preferably into the bottom portion in order to be most efficient. In a still further embodiment, the bottom of the gas disengaging means will have an orifice open to the main reactor slurry below, to prevent the build-up of catalyst particles and plugging of the unit. Still further, a simple baffle below the bottom orifice prevents feed gas from entering into the rejuvenation zone, while presenting no impediment to the downward flow of catalyst particles out the bottom of the cup.

Referring to Figures 1 (a) and 1 (b) there is schematically illustrated a simplified, partial cross section of a slurry gas disengaging and catalyst rejuvenating means 10 useful in the practice of the invention which comprises a hollow, vertical conduit or pipe 12 open at its top 14 and bottom 16 with means 18 for injecting catalyst rejuvenating gas into the bottom of the conduit, which means is a simple gas line with a nozzle (not shown) at the end inside the catalyst rejuvenating zone 20 which is the interior of the conduit. Conduit 12 is simply a metal pipe in the embodiment shown. A hollow metal cap 22 of cylindrical cross section surrounds the bottom of the conduit to form an

- 7 -

annular space 24 between the inner surface 26 of the cup and the outer surface 28 of the conduit, with the cup extending down past the bottom 16 of the conduit to form an open space 32 just below the open bottom of the conduit. The catalyst rejuvenation means 10 is that illustrated in Figures 1 (a) and 1 (c). The top 30 of the cup is open and the bottom contains an orifice, which in this embodiment is illustrated as a nozzle 34, to permit catalyst particles which may have disengaged from the slurry flowing down through the annular space 24 and up into the catalyst rejuvenating zone 20 to exit the bottom of the cup through nozzle 34, where they return to the slurry. This prevents catalyst particles from collecting in the bottom of the cup and possibly plugging it and preventing or reducing slurry flow up into the catalyst rejuvenation zone. In the embodiment shown, the cup 22 has a vertical, cylindrical side wall 23 which successively terminates at its bottom in a cone shaped section 25, a curved section 27 and finally nozzle 34. Curved section 27 provides more space for slurry flow than a continuation of the conical section would and also provides a space for any disengaged catalyst particles to fall to the bottom of the cup and down through the nozzle back into the slurry. A simple metal baffle 36 placed below the exit 35 of nozzle 34 prevents the CO containing synthesis gas bubbling up through the reactor from entering into the cup and rejuvenation zone, without impeding the downflow and exit through nozzle 34 of disengaged catalyst particles. In contrast to the invention, Figure 2 is a simple schematic of a rejuvenation tube 40 of the prior art which simply comprises a vertically disposed metal tube 42, open at its top 44 and bottom 46. A gas line 48 injects catalyst rejuvenating gas into the tube to rejuvenate the reversibly deactivated catalyst in the slurry flowing up through the tube by virtue of the lifting action of the rejuvenating gas. As long as the rejuvenating gas is flowing up through the tube, a constant flow of gas reduced slurry containing reversibly deactivated catalyst particles flows up through the tube in which the gas contacts the catalyst particles and rejuvenates them, while the catalyst rejuvenated slurry exits out the top back into the slurry body in (not shown) in which the tube is totally immersed. A simple cone shaped baffle 50, prevents syngas bubbles from entering up into the rejuvenating tube and impairing or preventing catalyst rejuvenation.

- 8 -

Figure 3 is a simple schematic of an HCS slurry reactor 60 which comprises a steel cylindrical vessel 62 containing a three phase, reactive HCS slurry 64 within, in which a gas disengaging and catalyst rejuvenating means 10 of the invention is shown as being totally immersed in the slurry. The syngas is introduced into the bottom of the reactor via gas line 66 and is bubbled up into the slurry by suitable gas distribution means (not shown) horizontally arranged across the surface of gas and liquid impermeable plate 70, which is sealed to the interior of the vertical wall 63 of vessel 62. Bubbles 72 of unreacted syngas and gas products of the HCS reaction rise up through and out of the slurry into gas disengaging and collecting zone 73 and are removed from the reactor via line 74. Not shown is filtration means, such as one or more liquid filters in the reactive slurry 64 or in one or more filtration vessels external of the reactor. Such filtration means separate the hydrocarbon slurry liquid from the catalyst particles as filtrate, and pass the filtrate to further processing and upgrading. Magnetic means may also be used to separate the catalyst particles from the hydrocarbon liquid product if the catalyst particles are magnetic or paramagnetic, as is disclosed in the prior art. As shown in Figure 1, the gas disengaging and catalyst rejuvenating means of the invention 10 comprises a vertical, hollow tube or pipe 12, open at its top and bottom, with the gas disengaging cup 22 surrounding the bottom of the tube. The interior of the tube 12 is the catalyst rejuvenating zone and is provided with rejuvenating gas injecting means 18 for injecting catalyst rejuvenating gas into the interior of the tube near the bottom thereof. A simple cone shaped baffle plate 36 is disposed below the opening or orifice 35 at the bottom of the cup 22 to prevent the uprising reactive gas from entering into either the annular gas disengaging space 24 or the rejuvenating zone 20. Arrows 76 indicate the downward flow of the slurry containing the reversibly deactivated catalyst particles into the gas disengaging zone 24 and arrows 78 indicate the outward flow and return of the catalyst rejuvenated slurry back into the slurry in the reaction zone (the slurry body) out the top of the rejuvenation conduit 12.

The uprising syngas serves to maintain the catalyst particles in suspension in the hydrocarbon slurry liquid. As soon as slurry enters a relatively quiescent zone in which

the uprising gas bubbles do not enter, the lighter gas bubbles immediately begin disengaging from the slurry liquid. At the same time, the heavier catalyst particles begin to settle out due to gravity and the lack of the uplifting effect of the reactive gas bubbles. Thus, the annular zone 24 between the inner wall surface of the cup 22 and the outer wall surface of the rejuvenation tube 12 provides a quiescent zone for the slurry passing down through the zone. The outer wall of the cup and the baffle prevent uprising gas from entering the quiescent zone and gas bubbles immediately begin disengaging from the slurry as soon as it enters the zone. The volumetric size of the zone, its length, slurry flow rate and gas disengaging rate are factored to size the zone so as to effectively remove most of the gas bubbles before the slurry enters up into the bottom 16 of the rejuvenation tube. The slurry flow rate through the tube is determined in large measure by the tube diameter and rejuvenation gas flow rate. Bubble rise velocity is a strong function of the bubble size and the gas disengaging cup is sized so that the downward velocity of the slurry (total flow divided by the disengaging means cross sectional area) is less than the rise velocity of the smallest bubbles it is desired to remove. Studies have shown that as much or more than 90 % of the gas bubbles may be removed from the slurry in this manner, before it goes into the rejuvenation tube. The catalyst settling rate must also be taken into account to prevent the catalyst particles from plugging or slowing the flow of slurry into the rejuvenating zone. Thus, while an orifice or nozzle at the bottom of the cup or disengaging zone may not always be necessary, it serves as insurance in the event of an imbalance in the slurry reactor, such as a slumped bed catalyst condition in which the catalyst concentration toward the bottom of the slurry is temporarily greater than what the disengaging and rejuvenating means was designed for, which could cause catalyst accumulation at the bottom of the cup. The gas disengaging means and the catalyst rejuvenating means have been illustrated as having a cylindrical cross section, but other shapes such as rectilinear and polygonal could be used if desired. While the rejuvenation tube is shown as vertical and wholly immersed in the slurry, some departures from vertical may be used and the tube or conduit may be bent to accommodate other mechanical devices in the reactor. However, vertical orientation is preferred. In one embodiment, which is a preferred

- 10 -

embodiment, the top of the rejuvenation zone or conduit may extend up out of the top of the slurry and/or feed the catalyst rejuvenated slurry to gas separating means (not shown) for separating and removing offgas formed by the catalyst rejuvenation from the rejuvenated catalyst slurry. The slurry from which the offgas has been removed is then passed back into the slurry body or elsewhere. Another aspect of the present invention is that of concentrating the catalyst in the slurry in the gas disengaging zone, which occurs by virtue of releasing the gas bubbles to form a denser slurry in which the catalyst is more concentrated. The hydrogen or hydrogen containing catalyst rejuvenation gas injected into the rejuvenation zone comprises hydrogen which may contain other gasses such as nitrogen, CO₂, H₂O, CH₄, C₂-C₄+ hydrocarbons, and also CO (as long as the mole ratio of the H₂ to CO) is sufficient to remove the CO and still at least partially rejuvenate the catalyst.

As disclosed in U.S. Patent 5,288,673, the degree of catalyst rejuvenation can be controlled by independently controlling the slurry temperature in the rejuvenating zone irrespective of the temperature of the main body of slurry in the surrounding HCS reaction zone. This patent discloses that temperature control in the rejuvenation zone or tubes is achieved by one or more of either increasing or decreasing the slurry residence time in the zone, so as to utilize the exothermic nature of the rejuvenation reactions, by insulating the rejuvenation tubes, by introducing heat or a cooling medium into the zone, by preheating the rejuvenation gas, etc. The '673 patent teaches that the temperature in the rejuvenation zone should be high enough to remove CO and at least partially rejuvenate the catalyst and low enough to minimize methane formation and wax (~C₂₀+ alkanes) hydrogenolysis. These teachings apply to the present invention also.

In an HCS process, liquid and gaseous hydrocarbon products are formed by contacting a syngas comprising a mixture of H₂ and CO with a suitable Fischer-Tropsch type of HCS catalyst, under shifting or non-shifting conditions and preferably non-shifting conditions in which little or no water gas shift reaction occurs, particularly when the catalytic metal comprises Co, Ru or mixture thereof. Suitable Fischer-Tropsch

- 11 -

reaction types of catalysts comprise, for example, one or more Group VIII catalytic metals such as Fe, Ni, Co, Ru and Re. In one embodiment the catalyst comprises catalytically effective amounts of Co and one or more of Re, Ru, Fe, Ni, Th, Zr, Hf, U, Mg, La on a suitable inorganic support material, preferably one which comprises one or more refractory metal oxides. Preferred supports for Co containing catalysts comprise titania, particularly when employing a slurry HCS process in which higher molecular weight, primarily paraffinic liquid hydrocarbon products are desired. Useful catalysts and their preparation are known and illustrative, but nonlimiting examples may be found, for example, in U.S. Patents 4,568,663; 4,663,305; 4,542,122; 4,621,072 and 5,545,674.

The hydrocarbons produced by an HCS process according to the invention are typically upgraded to more valuable products, by subjecting all or a portion of the C₅+ hydrocarbons to fractionation and/or conversion. By conversion is meant one or more operations in which the molecular structure of at least a portion of the hydrocarbon is changed and includes both noncatalytic processing (e.g., steam cracking), and catalytic processing (e.g., catalytic cracking) in which a fraction is contacted with a suitable catalyst. If hydrogen is present as a reactant, such process steps are typically referred to as hydroconversion and include, for example, hydroisomerization, hydrocracking, hydrodewaxing, hydrorefining and the more severe hydrorefining referred to as hydrotreating, all conducted at conditions well known in the literature for hydroconversion of hydrocarbon feeds, including hydrocarbon feeds rich in paraffins. Illustrative, but nonlimiting examples of more valuable products formed by conversion include one or more of a synthetic crude oil, liquid fuel, olefins, solvents, lubricating, industrial or medicinal oil, waxy hydrocarbons, nitrogen and oxygen containing compounds, and the like. Liquid fuel includes one or more of motor gasoline, diesel fuel, jet fuel, and kerosene, while lubricating oil includes, for example, automotive, jet, turbine and metal working oils. Industrial oil includes well drilling fluids, agricultural oils, heat transfer fluids and the like.

- 12 -

It is understood that various other embodiments and modifications in the practice of the invention will be apparent to, and can be readily made by, those skilled in the art without departing from the scope and spirit of the invention described above.

Accordingly, it is not intended that the scope of the claims appended hereto be limited to the exact description set forth above, but rather that the claims be construed as encompassing all of the features of patentable novelty which reside in the present invention, including all the features and embodiments which would be treated as equivalents thereof by those skilled in the art to which the invention pertains.

CLAIMS:

1. A slurry reactor containing means for rejuvenating a particulate catalyst dispersed in a three phase slurry comprising said catalyst, slurry liquid and gas bubbles, said means comprising a hollow fluid conduit having an entrance and an exit for passing said slurry therethrough, means for injecting a gas into the interior of said conduit and gas disengaging means located proximate said conduit entrance and in fluid communication with said interior of said conduit, for removing at least a portion of said gas bubbles from said slurry before it enters said conduit.
2. A reactor according to claim 1 wherein said gas disengaging means surrounds the bottom of said conduit to form an annular flow path for said gas disengaging slurry to flow therethrough.
3. A reactor according to claim 1 wherein said rejuvenation means also comprises gas separating means for removing and separating gas from said slurry exiting said conduit.
4. A process for rejuvenating a particulate, reversibly deactivated hydrocarbon synthesis catalyst in a slurry comprising said catalyst and gas bubbles in a hydrocarbon slurry liquid which comprises hydrocarbon synthesis products which are liquid at said synthesis conditions, said process comprising (i) withdrawing a portion of said slurry from a slurry body and passing it through a gas disengaging zone to disengage and remove said gas bubbles from said slurry to form a gas reduced slurry, (ii) passing said gas reduced slurry through a rejuvenation zone in which it contacts a catalyst rejuvenating gas comprising hydrogen to rejuvenate said catalyst and form a rejuvenated catalyst slurry, followed by (iii) returning said rejuvenated slurry back into said slurry body.

- 14 -

5. A process according to claim 4 wherein said catalyst comprises a supported Group VIII metal.
6. A process according to claim 3 wherein said metal comprises cobalt.
7. A process according to claim 6 wherein said catalyst includes titania.
8. A process according to claim 4 wherein said rejuvenation zone is at least partly immersed in said slurry.
9. A process according to claim 8 wherein said rejuvenation produces an offgas and wherein said rejuvenated slurry is passed through a gas separating zone to separate said offgas from said slurry before it is returned to said slurry body.
10. A process according to claim 4 wherein at least portion of said hydrocarbon synthesis products are upgraded by one or more conversion processes to at least one more valuable product.

1 / 2

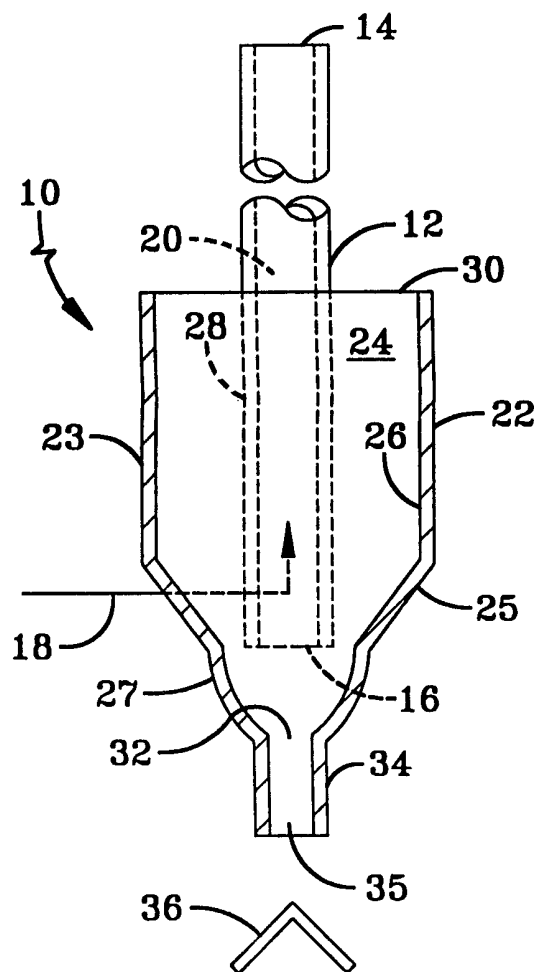


FIG-1(a)

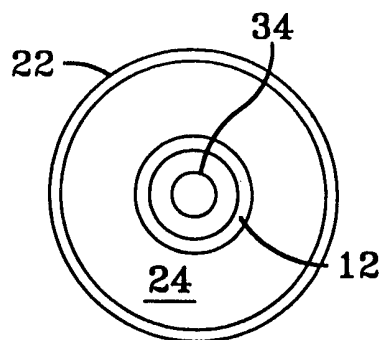


FIG-1(b)

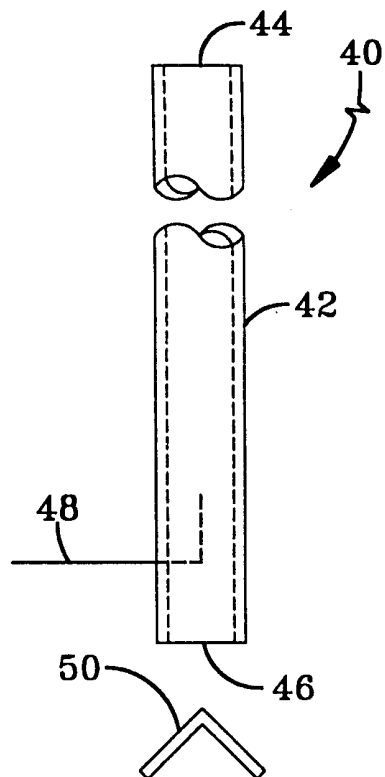


FIG-2
PRIOR ART

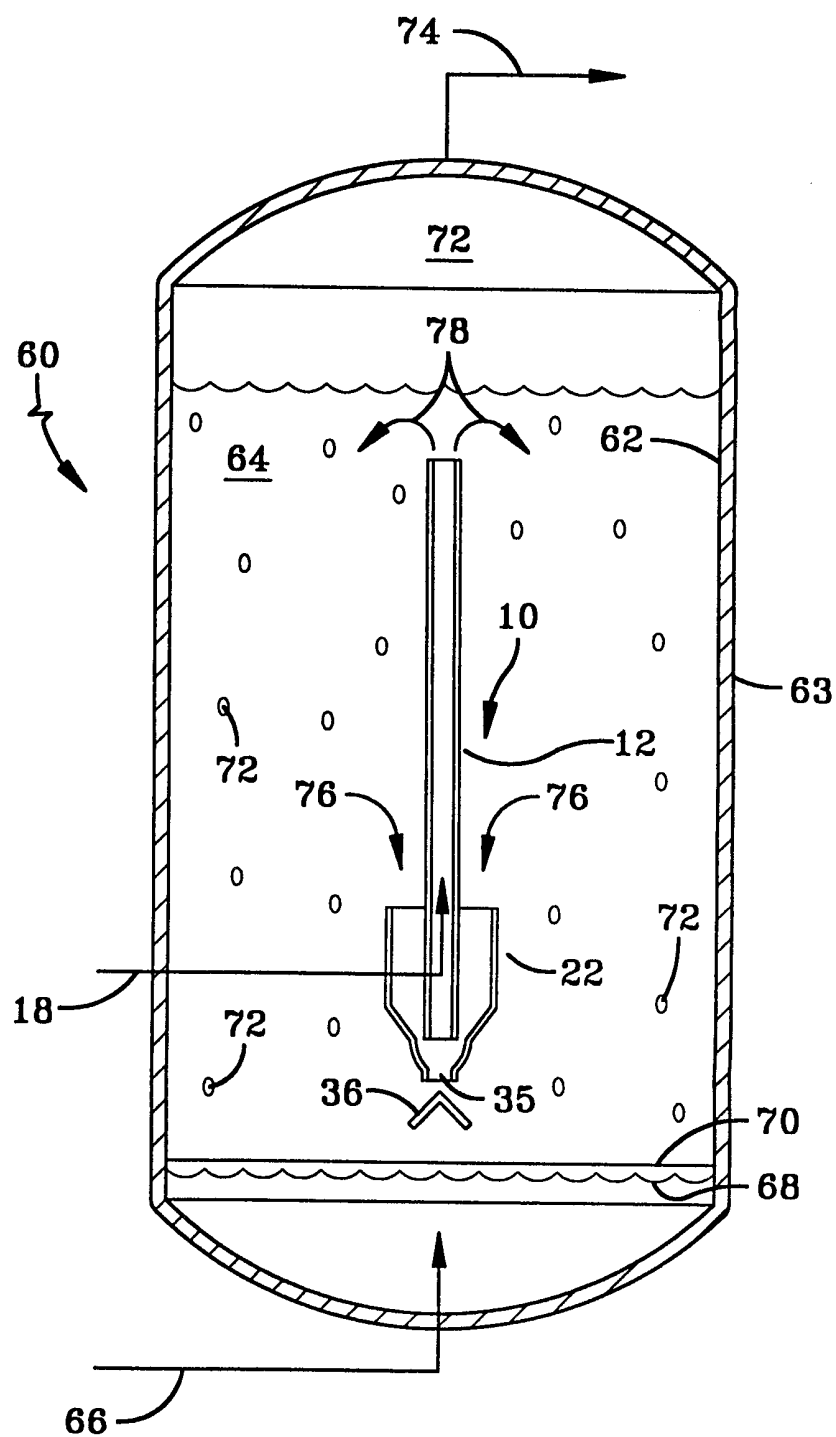


FIG-3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/08686

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C10G2/00 B01J8/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C07C B01J C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 268 344 A (MAULDIN CHARLES H ET AL) 7 December 1993 cited in the application see claim 1 see column 8, line 15 - line 29 ---	1,4-8
A	WO 94 14735 A (EXXON RESEARCH ENGINEERING CO) 7 July 1994 ---	
A,P	WO 97 17137 A (SHELL CANADA LTD ;SHELL INT RESEARCH (NL)) 15 May 1997 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 September 1998

Date of mailing of the international search report

16/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Herdt, 0

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/08686

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5268344 A	07-12-1993	AU 675492 B AU 5827694 A CA 2150558 A EP 0674544 A NO 952406 A WO 9414535 A	06-02-1997 19-07-1994 07-07-1994 04-10-1995 17-08-1995 07-07-1994
WO 9414735 A	07-07-1994	US 5382748 A AU 675483 B AU 5749994 A CA 2150800 A EP 0674610 A NO 952404 A	17-01-1995 06-02-1997 19-07-1994 07-07-1994 04-10-1995 11-08-1995
WO 9717137 A	15-05-1997	AU 7567496 A EP 0861122 A NO 982086 A	29-05-1997 02-09-1998 07-05-1998